

# PARTS & ASSEMBLY SHEET





















Fixture Name: Geller 4090-SF MW

This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

## PARTS LIST

Company Name: \_\_\_\_\_ Co Account#: \_\_\_\_\_  
below to be filled out by retailer

Canopy 1ea $\Phi 150 \times H41$ mm		Hex Nut 2ea NPS-1/4-18		Wire Connectors 3ea Orange	
Chain 1ea $\Phi 3.8 \times 6$ ft		Nipple 1ea NPS 1/4-18*65 mm		Canopy Loop 1ea NPS 1/4-18*H41 mm	
Link 2ea W20*H45 mm		Mounting Strap 1ea W103*H2.0 mm		Mounting Screws 2ea G8/32*H32 mm	
Mounting Screws 2ea G5/32*H50 mm		Hex Nut 3ea NPS-1/8-27		Knob 2ea $\Phi 12$ mm	
Loop 1ea W40*H74 mm		Check Ring 1ea $\Phi 25 \times H5$ mm		Nipple 1ea NPS 1/8-27*85 mm	
Pipe 1ea $\Phi 22 \times H64$ mm		Cap 1ea $\Phi 52 \times H12$ mm		Wood 1ea $\Phi 60 \times H10$ mm	
Finial 1ea $\Phi 25 \times H12$ mm		Washer 1ea $\Phi 20 \times H1.0$ mm			

Part Needed \_\_\_\_\_ Quantity \_\_\_\_\_

Part Needed \_\_\_\_\_ Quantity \_\_\_\_\_

Reason why (missing, scratched, broken glass, bent, bad finish)

Comments \_\_\_\_\_


## FIXTURE ASSEMBLY INSTRUCTIONS

**Read and review installation instruction sheet before assembling the fixture**

1. Place Check Ring (B) over the nipple and secure with Loop (A) if for pendant light fixture use.
2. Thread Nipple (C) and secure with hex nut.
3. Place Pipe (C) and check ring over the nipple and secure with hex nut.
4. Install the bulbs as specified. (no bulbs included in the package)(Do not exceed the maximum wattage rating!)
5. Place Glass Piece (F) and secure with washer and hex nut.
6. Place Wood (G) over the Nipple (C) and secure with Finial (H).

4090-SF MW

Fig.3

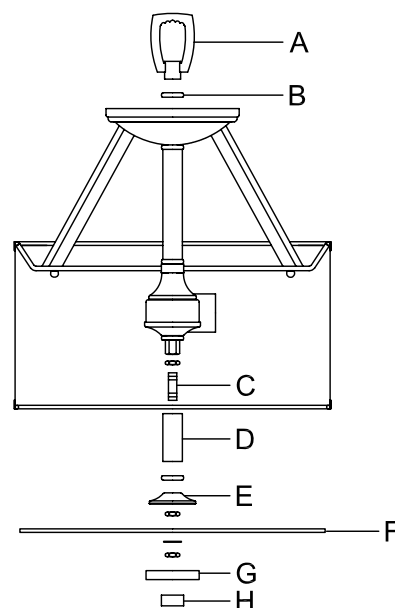

For Customer Service, contact the place of purchase to arrange for replacement parts.

# INSTALLATION INSTRUCTIONS

Fixture Name: Geller 4090-SF MW

For Semi Flush Fixture

## WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

### HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old mounting strap.
3. The Mounting Strap (B) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture Canopy (D) and thread the two Fixture Mounting Screws (A) half way into the Fixture Mounting Strap (B).
4. Attach the Fixture Mounting Strap (B) to the Junction Box using the two Mounting Screws (C). Tighten the Screws (C) securely with screwdriver.
5. Use a pair of pliers to open one end link of the chain provided, and connect to the fixture loop. Close the link.
6. By measuring, determine correct number of links needed for proper hanging height. Using pliers disconnect and discard remaining chain.
7. Lace the fixture wires through the chain and Canopy.

### CONNECTING THE WIRES (Fig.2)

8. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
9. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (B) or connect both wires together using the correct size of wire connectors.

**NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.**

10. Tuck these wire connections neatly into the Junction Box.

### FINISHING THE INSTALLATION (Fig.3)

11. Raise Canopy (D) to the ceiling and secure in place by tightening the Deco Nut (F).
12. Install the light bulbs and glass shade as per the fixture assembly sheet.

**YOUR INSTALLATION IS NOW COMPLETE. TURN POWER ON AT TO THE JUNCTION BOX & TEST THE FIXTURE.**

Fig.1


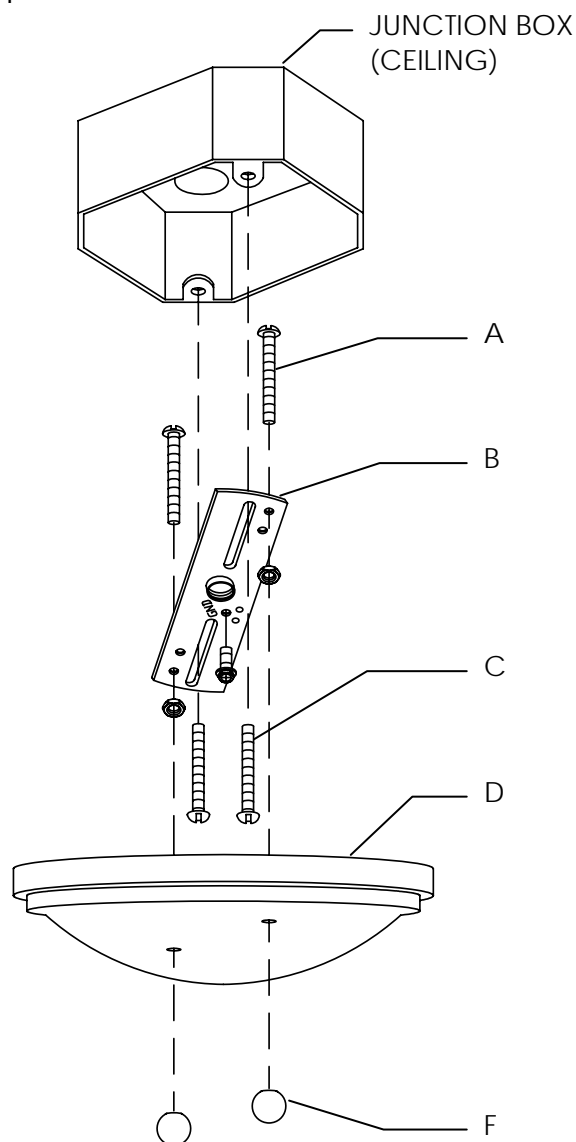


Fig.2

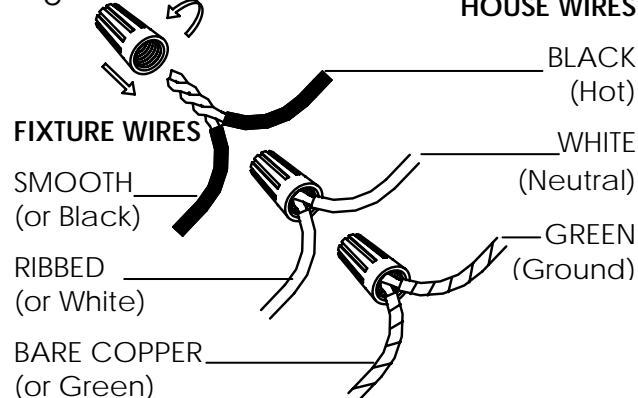

# INSTALLATION INSTRUCTIONS

Fixture Name: Geller 4090-SF MW

For Pendant Light Fixture

## WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

### HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old mounting strap.
3. Thread Nipple(C) into Canopy Loop (F) until snug.
4. Thread other end of the Nipple (C) with Canopy Loop attached into Mounting Strap (D).
5. Place Lock Washer (B) over end of Nipple (C) protruding through Mounting Strap (D) and thread Hex Nuts (A) onto Nipple until tight.
6. Take this mounting strap assembly and mount to ceiling junction box with junction box Screws (E). Tighten screw securely with screw driver.
7. Unscrew the Canopy loop collar (H) from the Canopy loop. Take the canopy and pass over the Canopy loop. Approximately one half of the canopy loop exterior threads should be exposed. Adjust until desired height is reached. \*the Canopy loop collar should fit snugly on the Canopy loop after the canopy is installed. Remove Canopy and Canopy lock collar.
8. Assemble the fixture and have an assistant or secure support hold the weight of the fixture while you complete the wiring connections.
9. Thread the fixture wires and ground wire of the assembled fixture through the canopy loop (F) and nipple(C) and into the outlet box.

### CONNECTING THE WIRES (Fig.2)

10. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
11. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (B) or connect both wires together using the correct size of wire connectors.

**NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.**

12. Tuck these wire connections neatly into the Junction Box.

### FINISHING THE INSTALLATION (Fig.3)

13. Raise Canopy (G) to the ceiling and secure in place by tightening the Canopy loop collar (H) into the Canopy Loop (F).
14. Install the light bulbs and glass shade as per the fixture assembly sheet.

**YOUR INSTALLATION IS NOW COMPLETE. TURN POWER ON AT TO THE JUNCTION BOX & TEST THE FIXTURE.**

Fig.1

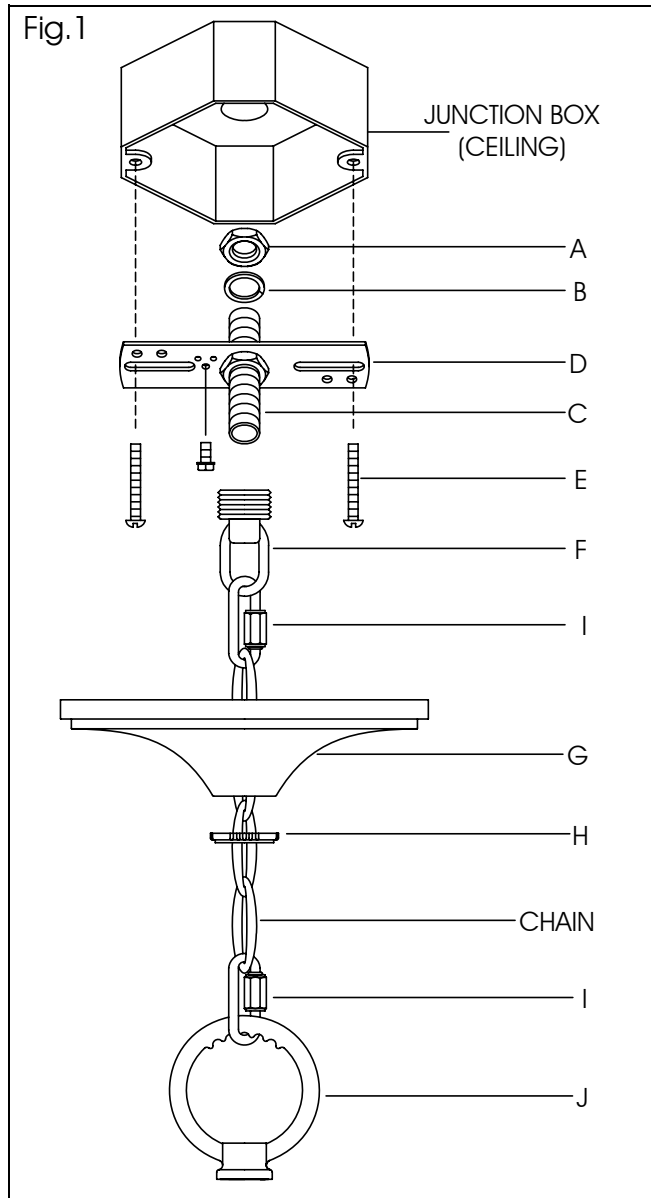


Fig.2

