

INSTALLATION INSTRUCTIONS


Fixture Name: BEAU JARDIN 5400-FM RG

For Flush Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

HANG THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. Thread the two Fixture Mounting Screws (A) into the pre-drilled Holes in the Mounting Strap (B) spaced the same distance apart as the holes in the Ceiling Pan (D). Secure in place with the Small Hex Nuts (E).
4. Attached Mounting Strap (B) to the junction box using the two Screws (C) from the Outlet Box. The side of the mounting strap marked "GND" must face out.
5. While holding the Ceiling Pan (D) toward the ceiling, Connect the electrical wires as follows.

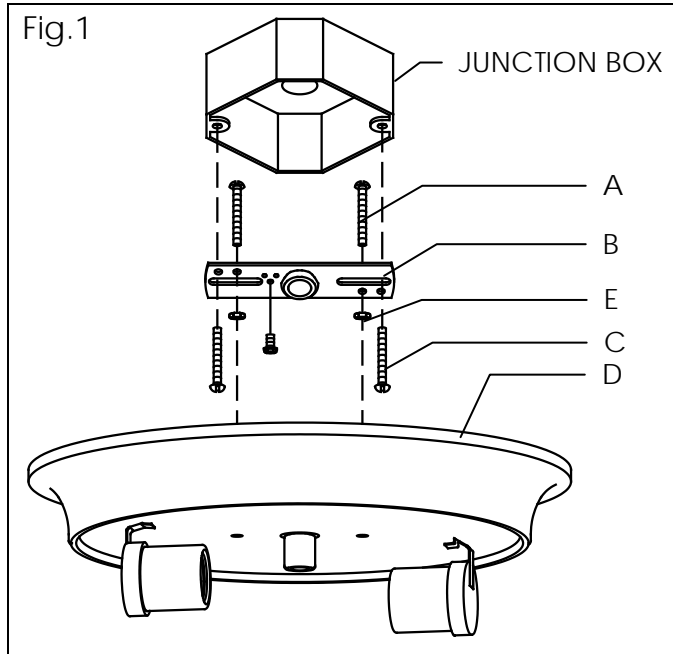


CONNECTING THE WIRES (Fig.2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (B) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

8. Tuck these wire connections neatly into the Junction Box.

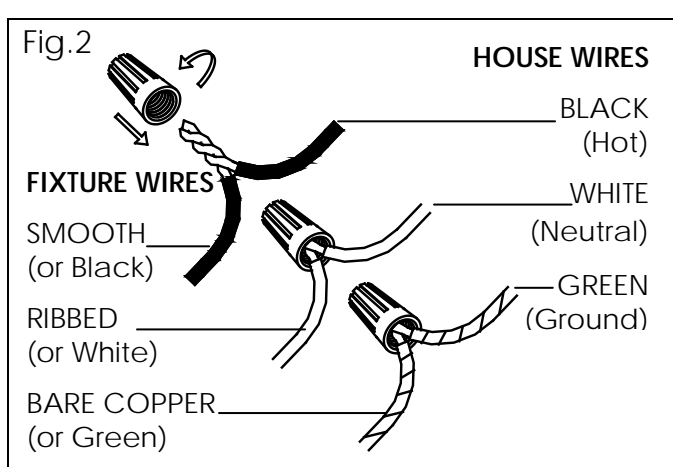


FINISHING THE INSTALLATION (Fig.3)

9. Finish mounting the Ceiling Pan (D) by placing it over the Mounting Strap (B). Rotate the Pan until the Mounting Screws (A) protrude through the "Keyholes" located in the bottom of Ceiling Pan (D). Secure the Ceiling Pan (D) by screwing Ball Nuts (F) on the Mounting Screws until taut.
10. Install glass as per the fixture assembly instructions.

YOUR INSTALLATION IS NOW COMPLETE. TURN POWER ON AT TO THE JUNCTION BOX & TEST THE FIXTURE.

CAUTION-RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR MIN 90°C SUPPLY CONDUCTORS.

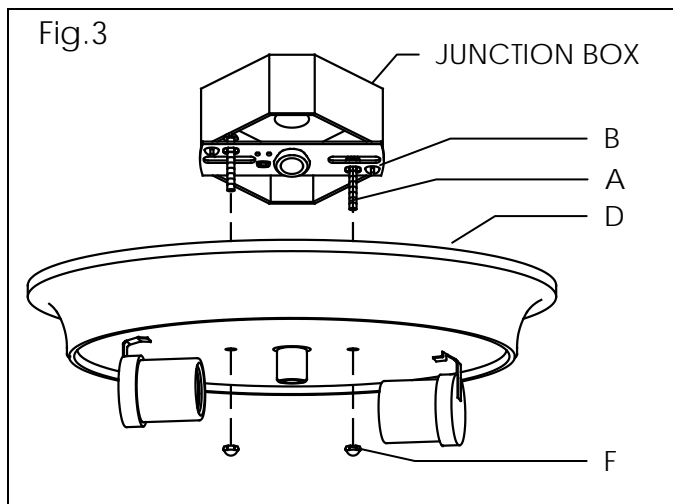

PARTS & ASSEMBLY SHEET












Fixture Name: BEAU JARDIN 5400-FM RG

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co Account#: _____
below to be filled out by retailer

Mounting Strap 1ea w98*T1.5 mm		Green Screw 1ea G8/32*H8 mm		Finial 1ea Φ20*H20 mm	
Wire Connectors 3ea Orange		Nipple 1ea NPS1/8-27*H130 mm		Small Hex Nut 2ea G5/32	
Mounting Screws 2ea H32 mm 2ea H55 mm		Washer 1ea Φ25*H1.0 mm		Big Hex Nut 2ea NPS 1/8-27	
Ball Nut 2ea G5/32		Crystal Leaf 6ea W27*H65 mm			

Part Needed _____ Quantity _____

Part Needed _____ Quantity _____

Reason why (missing, scratched, broken glass, bent, bad finish)

Comments _____

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture

1. Thread the Nipple (B) into the Ceiling Pan (A) and secure with a big hex nut.
2. Install the bulbs as specified.
(no bulbs included in the package)
(Do not exceed the maximum wattage rating!)
3. Place Glass (C) over Nipple (B) and secure with washer and big hex nut.
4. Screw Crystal Leaf (D) on the Bottom cap (E).
5. Place Bottom cap (E) over Nipple (B) and secure with Finial (F).

5400-FM RG

Fig.4

