





Fixture Name: **Cercado 9018-SFM COB**

This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

<b>PARTS LIST</b>		Company Name: _____ Co. Account #: _____ to be filled out by retailer	
Mounting Strap 1ea L104*W24*H11mm 	Mounting screw 2ea 8/32-IP*H1" 	Mounting screw 2ea 5/32-IP*H1-1/4" 	
Hex nut 2ea 3/8-IP*H3mm 	Wire connector 2 ea A3 Orange 	Hex Wrench 1 ea L2-3/8" *W3/4" 	
Canopy 1 ea 5.125"Dia*.875"E 	Hex nut 1/2**H3mm 2 ea 3/8**H3mm 1ea  	Nipple 1ea 1/2**H40mm 1ea 3/8**H55mm  	
Chain 1 ea 6ft*3.8mm 	Wire connector 6 ea A3 Orange 	Top loop 1 ea 3/8-IP*H58mm 	
Chain connector 2 ea Φ5*H58mm 	Tube 1 ea Φ1" *W3/4**1-3/4" 	Canopy loop 1 ea 1/2**H46mm 	
Assembly Screw 3ea 1/8**H10mm 3ea 5/32**H10mm  	Decorative nut 2 ea 5/32-IP*H9mm 1ea Φ3/4**1/2"H  	Canopy loop collar 1 ea Φ1-1/5**H4mm 	
Mounting strap w/ ground screw 1ea1" *4" w/ Φ1/2"center 	Cover 1 ea Φ1-1/8**H5mm 1ea Φ1-5/8**H5mm 	Washer 1 ea Φ1-1/4**H1mm 1ea Φ1-1/4**H3mm 	
Part Needed _____	Quantity _____		
Part Needed _____	Quantity _____		
Reason why (missing, scratched, broken glass, bent, bad finish)			
Comments _____			

## FIXTURE ASSEMBLY INSTRUCTIONS


Read and review installation instruction sheet before assembling the fixture.

ASSEMBLING THE FIXTURE as Flush mount (Fig. 1)

1. Use the fixture ceiling pan (F) to mount as a flush with ceiling.
2. Place the end of Bar (B3) into corresponding hole on frame cage (B8).
3. Screw the Assembly Screw (B6) into the end of Bar (B3) with the Hex Wrench (B7) until tight.
4. Thread the small tube (B2) to the ceiling pan coupler.
5. Pull the wires through (B2) and screw the socket assembly (A1)

to the tube (B2)

**NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.**

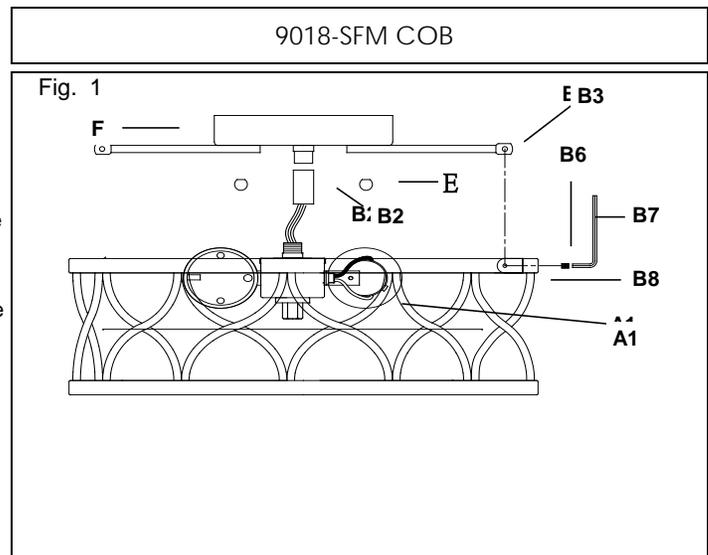

For Customer Service, contact the place of purchase to arrange for replacement parts.


# PARTS & ASSEMBLY SHEET

Fixture Name: Cercado 9018-SFM COB

## TOP VIEW RENDERING (Fig 2)

We provide a top view rendering which can show you clearly about the 3 Metal Plate. They are used for fasten the glass. These 3 Metal Plate can not be find in the specification


Fig 2

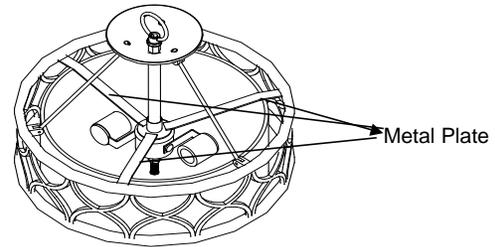

## ASSEMBLING THE FIXTURE as Semi-flush (Fig 3)

1. Remove the top loop. This will only be used when chain hung.
2. Screw the Assembly Screw (B1) through the top cap into the hole of Bar (B2) until tight.
3. Place the end of Bar (B3) into corresponding hole on frame cage (B4) and screw the Assembly Screw (B5) into the end of Bar (B3) with hex wrench (B6) until tight.
4. Screw the Tube (B7) into the Bushing (B8) until tight.
5. Pull the wires through (B7) and screw the socket assembly (A1) to the tube (B7)


Fig 3

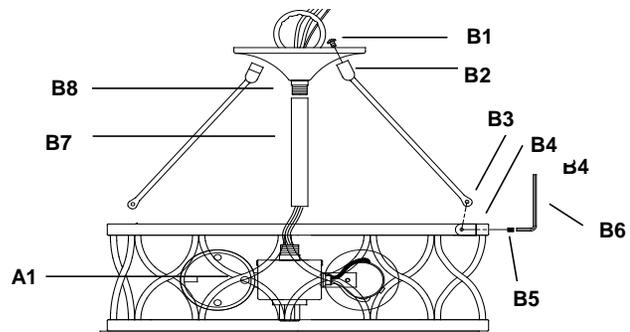

## ASSEMBLING THE FIXTURE as Chain hung (Fig 4)

1. Use the two short screws to hold the Deco nuts (E) in place on the fixture Top cap (D).
  2. Assemble the Frame as in Fig 2
  3. Feed the fixture wires through the Top loop (D0) and pull the wires until taut. Then screw the Top Loop to the coupling on the top of fixture (D) until tight.
  4. By measuring determine correct number of links needed for proper hanging height. Use a pair of pliers to open one link of the Chain (C2) then remove the excess Chain (C2) and discard it.
  5. Use one chain connector (E2) to attach one end of the chain to the Top loop (D0) and close the chain connector.
  6. Feed the fixture wires through the Chain (every three links) and pull the wires until taut.
  7. Slip Canopy loop collar (B2) over the chain, then do the same with the canopy (F2).
  8. When ready to complete the installation Use the other chain connector and attach the other end of the chain to the canopy loop (A2) and close the chain connector.
  9. Make sure the weight of the chandelier is supported by the chain- not the electrical wires.
- \* You may now install the fixture


Fig 4

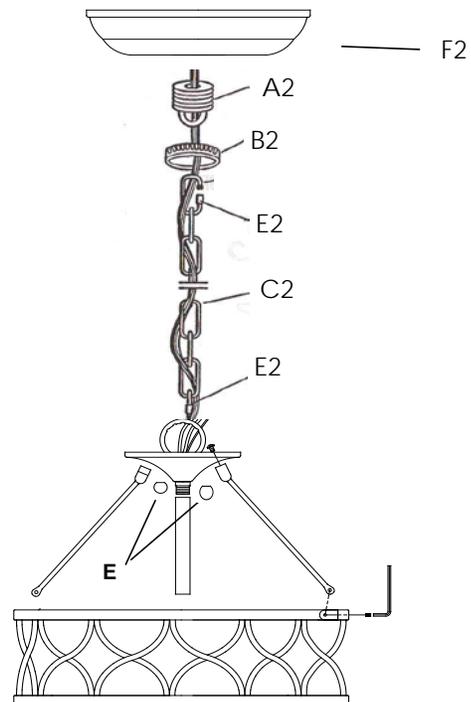

## ASSEMBLING THE GLASS (Fig 5)

10. Install the light bulbs in accordance with the fixture's specification .
11. Screw the Nipple (A2) into the Bushing (A8), and then thread the Hex Nut (A1) onto Nipple (A2) until tight.
12. Install the lighting bulbs in accordance with the fixture's specification .
13. Place the Glass Shade (A3) inside of the Body (B8) by through the nipple (A2).
14. While holding the Glass Shade (A3), then place the Washer (A4) and Hex Nut (A5) over the Nipple (A2).
15. Slide Bottom Cap (A6) over Nipple (A2) and thread the Finial (A7) until tight.

Fig 5

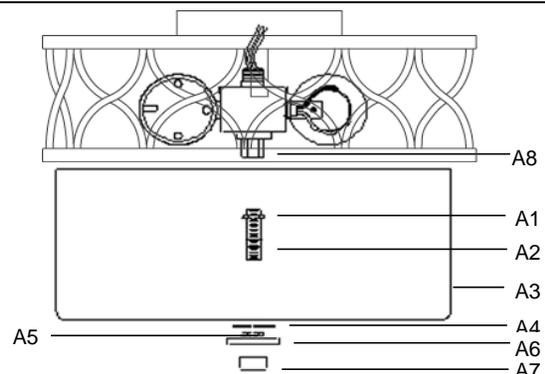

For Customer Service, contact the place of purchase to arrange for replacement parts.

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE as Flush mount (Fig 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. The Mounting Strap (B) contains several pairs of threaded holes, find the pair of holes that match the hole spacing in your fixture ceiling pan (F) and thread the two Mounting Screws (D) half way into the Mounting Strap (B) facing down, Secure in place with hex nuts. These will have their threaded ends protrude through the two holes in the fixture ceiling pan (F).
4. Place the Mounting Strap (B) over the junction box.
5. Attach the Mounting Strap (B) to the Junction Box using the two mounting screws (A). Tighten the screws (A) securely with screw driver.

### CONNECTING THE WIRES (Fig 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
  7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (D) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
8. Tuck these wire connections neatly into the Junction Box.

### FINISHING THE INSTALLATION (Fig.3)

9. Finish mounting the Ceiling Pan (F) by placing it over the Mounting Strap (B) . Rotate the Pan until the Mounting screws (D) protrude through the "Keyholes" located in the bottom of Ceiling Pan (F). Secure in place with the Deco nuts (E) turning until taut.
10. Install the light bulbs in accordance to the fixture's specifications.
11. Install the glass shade as per the assembly instructions.

**YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.**

Fig. 1

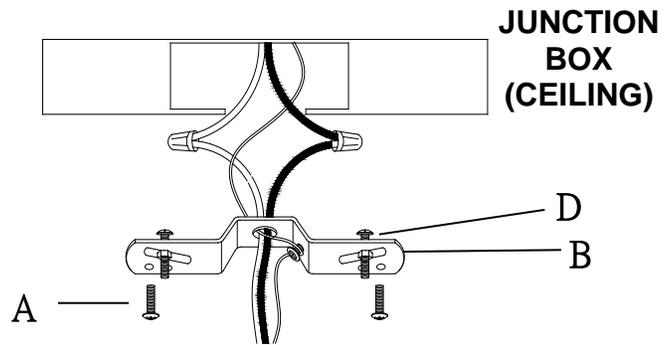


Fig. 2


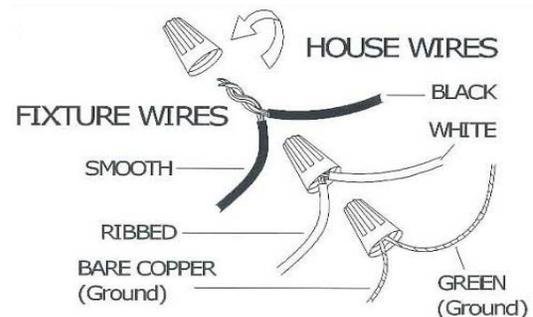


Fig. 1

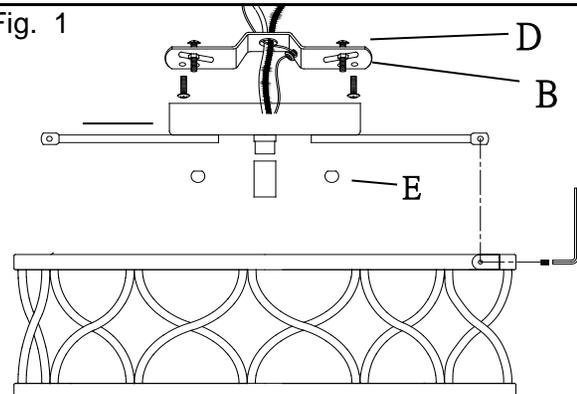

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE as Semi flush (Fig 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. The Mounting Strap (B) contains several pairs of threaded holes, find the pair of holes that match the hole spacing in your fixture canopy (F) and thread the two Mounting Screws (D) half way into the Mounting Strap (B) facing down, Secure in place with hex nuts. These will have their threaded ends protrude through the two holes in the fixture canopy (F).
4. Place the Mounting Strap (B) over the junction box.
5. Attach the Mounting Strap (B) to the Junction Box using the two mounting screws (A). Tighten the screws (A) securely with screw driver.

### CONNECTING THE WIRES (Fig 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
  7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (D) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
8. Tuck these wire connections neatly into the Junction Box.

### FINISHING THE INSALLATION (Fig 3)

9. Place the fixture's canopy over the Mounting Strap (B) and over the Mounting Screws (D), adjust the fixture canopy (F) until the Mounting Screws (D) protrude out from the canopy (F) and secure the fixture against the ceiling by threading the decorative nuts (E) until tight.
10. Install the light bulbs and glass shade as per the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

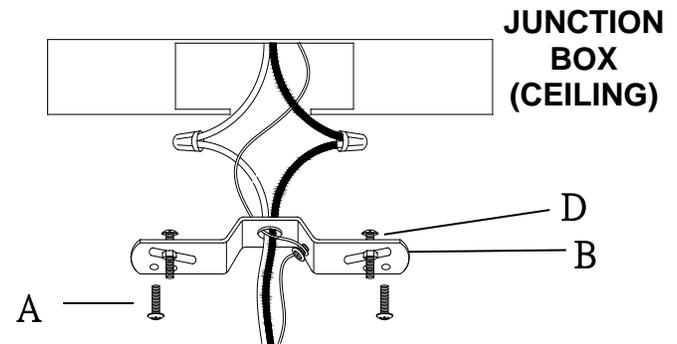


Fig. 2


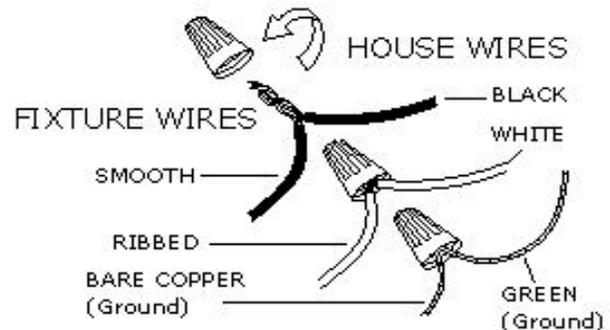


Fig. 3

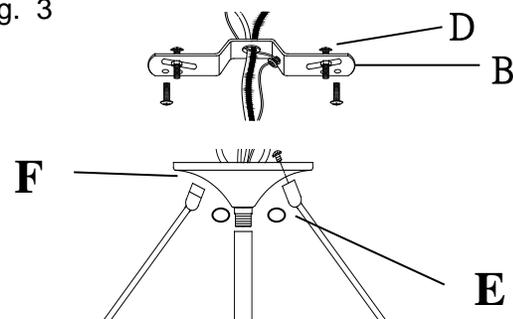

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old mounting strap.
3. Thread Nipple(C) into Canopy Loop (F) until snug.
4. Thread other end of the Nipple (C) with Canopy Loop attached into Mounting Strap (D).
5. Place Lock Washer (B) over end of Nipple (C) protruding through Mounting Strap (D) and thread Hex Nuts (A) onto Nipple until tight.
6. Take this mounting strap assembly and mount to ceiling junction box with junction box Screws (E). Tighten screw securely with screw driver.
7. Unscrew the Canopy loop collar(H) from the Canopy loop. Take the canopy and pass over the Canopy loop. approximately one half of the canopy loop exterior threads should be exposed. Adjust until desired height is reached. \*the Canopy loop collar should fit snugly on the Canopy loop after the canopy is installed. Remove Canopy and Canopy lock collar.
8. Assemble the fixture and have an assistant or secure support hold the weight of the fixture while you complete the wiring connections.
9. Thread the fixture wires and ground wire of the assembled fixture through the canopy loop and nipple and into the outlet box.

### CONNECTING THE WIRES (Fig 2)

10. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
  11. Attach the GROUND wire(GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (D) or connect both wires together using the correct size of wire connectors.
- NOTE:** Twist the wires together in the same direction you twist the wire connector onto the wires.
12. Tuck these wire connections neatly into the Junction Box.

### FINISHING THE INSTALLATION

13. Raise Canopy (G) to the ceiling and secure in place by tightening the Canopy loop collar(H) onto the Canopy Loop(F)
14. Install the light bulbs and glass shade as per the fixture assembly sheet.

Fig. 1


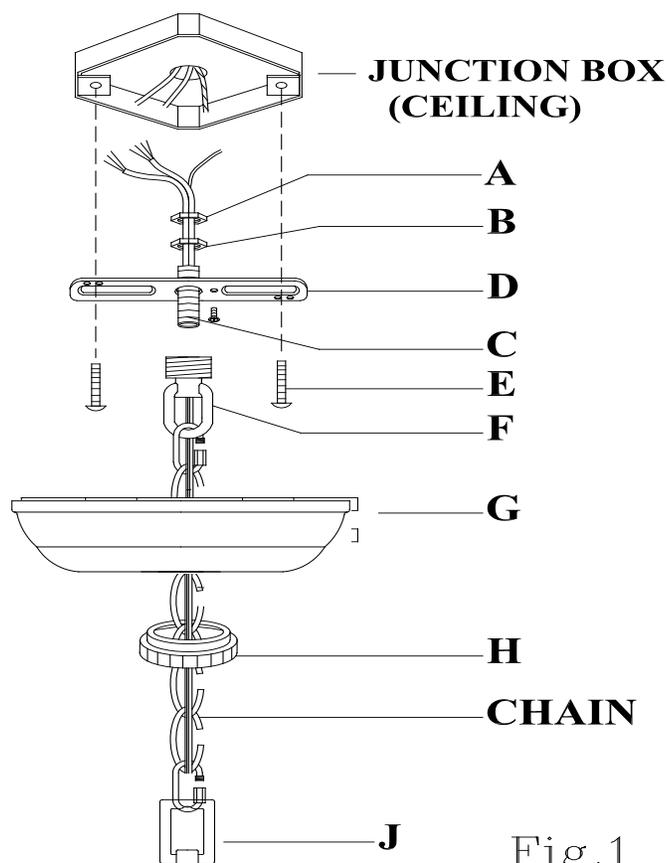


Fig. 2

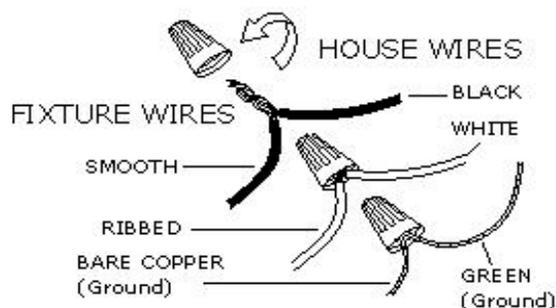

**YOUR INSTALLATION IS NOW COMPLETE.  
RETURN POWER TO THE JUNCTION BOX AND  
TEST THE FIXTURE.**