


AIR SHADOW™ SERIES

FP825OB Traditional Ceiling Fan Assembly

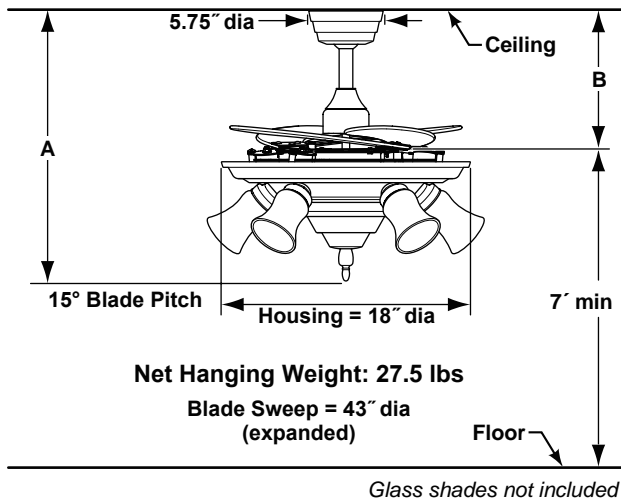

	A	B
Fan w/6" downrod	21.00"	10.90"
Fan w/12" downrod	27.00"	16.90"
Fan w/18" downrod	33.00"	22.90"
Fan w/24" downrod	39.00"	28.90"
Fan w/36" downrod	51.00"	40.90"
Fan w/48" downrod	63.00"	52.90"
Fan w/60" downrod	75.00"	64.90"
Fan w/72" downrod	87.00"	76.90"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 18 motor is designed for optimal performance with this fan.

BLADES:

A set of four cherry finish wood blades included.

CONTROL OPTIONS:

TR28WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels, demo mode, reverse and off button. Instructions are provided with each control.

LIGHTING OPTIONS:

Includes LK825OB traditional downlight housing and five 25-watt candelabra bulbs. 2¼" glass shades are not included or required. See our catalog or visit www.fanimation.com for glass shade selections.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well-sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

Available Finish

OB	Oil-rubbed bronze with cherry wood blades
----	---

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	267	4514	87	0.40	48
Med	220	3696	103	0.38	35
Low	168	2776	127	0.33	22