







Fixture Name: TUCSON 11705-S WI

This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

\*\*some parts may be attached to fixture

<b>PARTS LIST</b>		Company Name: _____ Co. Account #: _____ below to be filled out by retailer	
Cross Mounting Strap  1ea 100*95mm	Glass  4 ea	Wire Connector  3ea P3 Orange	Acorn Nut & Gasket Washer  2ea
Fixture Mounting Screw  2ea	Mounting Screw  2ea M4*25MM		
Part Needed _____		Quantity _____	
Part Needed _____		Quantity _____	
Reason why ( missing, scratched, broken glass, bent, bad finish) _____			
Comments _____			

## FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet, but do not install before assembling the fixture.

1. Unscrew the Screws (O) holding the Cage body (M) to the Top cap (H) and separate.  
--see inset

Note: Glass panels are shipped already assembled. Retain instructions in case of need to replace panel. Glass edges may be sharp. Wear gloves for protection during installation to avoid injury.

2. Place first piece Glass into the inner Rabbet (K) of the Cage body according to the diagram, and press the tab (N) onto the glass by hand to secure. Repeat with remaining Glass panels.


\* You may now install the fixture frame.

3. Install the light bulb in accordance with the fixture's specifications.

4. Raise the Cage body (M) to the Top Cap (H) and tighten with Screws(O).

DO NOT EXCEED MAXIMUM WATTAGE RATING!

**NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.**

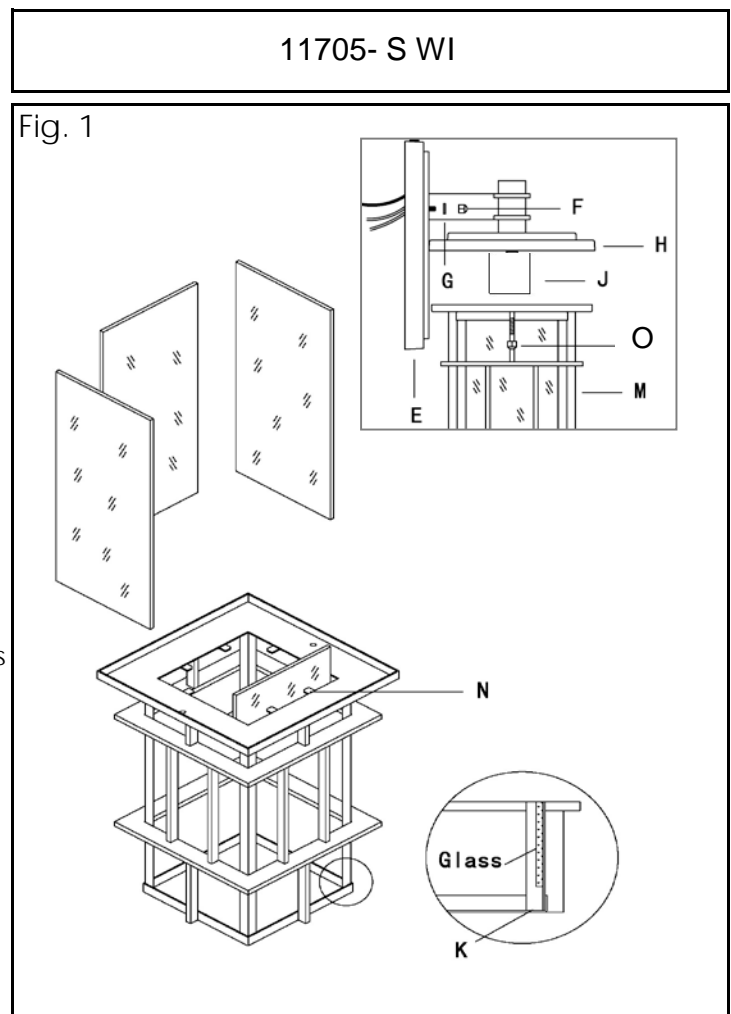

Fixture Name: TUCSON 11705-L, M, S WI

For Wall Mount Outdoor Fixture

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE (Fig 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. Unscrew the Acorn Nuts (F), take off the Gasket (G), remove the Mounting Strap (B) from the Back Plate (E). Keep them from being lost.
4. Place the Mounting Strap (B) over the Junction Box so the Fixture Mounting Screws (C) are vertical or horizontal, as required by the fixture type.
5. Attach the Fixture Mounting Strap (B) to the Junction Box using the two Mounting Screws (A). Tighten the Mounting Screws (A) securely with screwdriver.

### CONNECTING THE WIRES (Fig 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
  7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (B) or connect both wires together using the correct size of wire connectors.
- NOTE:** Twist the wires together in the same direction you twist the wire connector onto the wires.
8. Tuck these wire connections neatly into the Junction Box.

### FINISHING THE INSTALLATION (Fig 3)

9. To prevent moisture from entering the Junction box (A) and causing a short, use clear caulking (i.e. indoor/outdoor silicone sealant) to outline the outside of fixture back plate (E) where it meets the wall leaving a space at the bottom to allow any moisture to escape. (Fig.3)
  10. Place the fixture Back Plate (E) over the two Mounting Screws (C), then place the Gasket (G) over the screws, and secure the Back Plate (E) against the wall by threading the Acorn Nuts (F) onto the Mounting Screws (C) until snug against the wall. (Fig 1)
  11. Install the light bulb and glass cage as per the fixture assembly sheet.
- YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

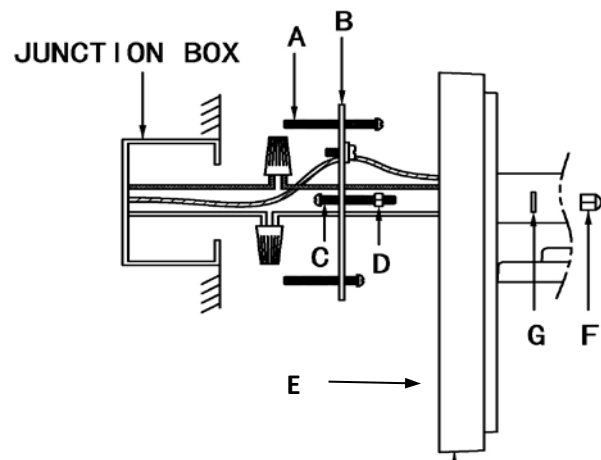


Fig. 2

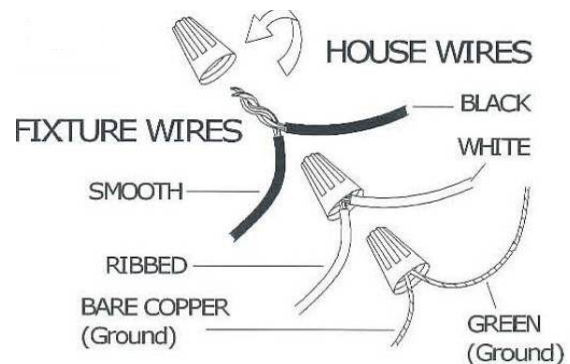


Fig. 3

