









# PARTS & ASSEMBLY SHEET

Fixture Name: Valencia 2049-4P FB

This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.


<b>PARTS LIST</b>		Company Name: _____ Co. Account #: _____ to be filled out by retailer	
Canopy 1 ea 5.2"DIA*1.1" 	Hex Nut (A) 1 ea 3/8"*H3mm 	Nipple (C) 1 ea 3/8"*H45mm 	
Chain 1 ea 6FT*Φ4.2mm 	Threaded Ring (H) 1 ea Φ23-16T*H5mm 	Spring Washer (B) 1 ea Φ15*H3mm 	
Chain Connector 2 ea Φ4*H55mm 	Screw Collar Loop (F) 1 ea 3/8"*H42.4mm 	Junction Box Screw (E) 2 ea #8-32N*H32mm 	
Mounting Strap (D) 1 ea 3/4"*1" 	Green Ground Screw 1 ea #8-32N*H10mm 	Wire Connectors 3 ea P3 	
Top Loop (J) 1 ea W44*H69mm 	Deco Nut (Round) (M) 4 ea 5/32"*H9mm 	Candle Sleeve (O) 4 ea W22xH105mm 	
Crystal (K) 2 ea W21*63Lmm 	Glass (P) 4 ea W218*H300mm 		
Part Needed _____	Quantity _____		
Part Needed _____	Quantity _____		
Reason why _____	( missing, scratched, broken glass, bent, bad finish)		
Comments _____			

## FIXTURE ASSEMBLY INSTRUCTIONS

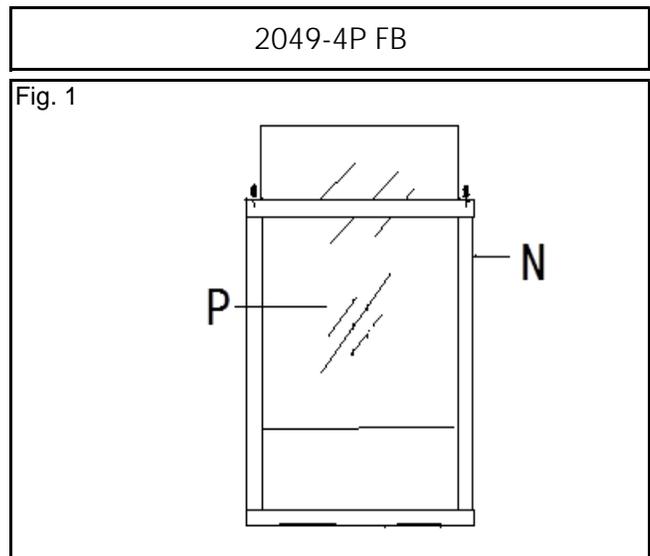Read and review installation instruction sheet before assembling the fixture.

- Slide the glass panels (P) into the fixture cage (N), then secure with clips.

**NOTE: INSTALL THE GLASS ASSEMBLY BEFORE THE FIXTURE IS HUNG.**



For Customer Service, contact the place of purchase to arrange for replacement parts.

# PARTS & ASSEMBLY SHEET

Fixture Name: Valencia 2049-4P FB

## ASSEMBLING THE FIXTURE (Fig. 2)

2. Slide the candle sleeves on threaded socket..

3. Install the light bulbs in accordance with the fixture's specifications.

4. Then screw the Top Loop (J) to the center column until tight.

5. Lower the fixture over the glass cage, use the round Deco nuts (M) to secure arms (L) to the cage (N).

6. Then hang the Crystals (K).

7. By measuring determine correct number of links needed for proper hanging height. Use a pair of pliers to open one link of the Chain then remove the excess Chain and discard it.

8. Use one chain connector to attach one end of the chain to the Top loop (J) and close the chain connector.

9. Feed the fixture wires through the Chain (every three links) and pull the wires until taut.

10. Slip Canopy loop collar over the chain, then do the same with the canopy.



11. When ready to complete the installation Use the other chain connector and attach the other end of the chain to the canopy loop and close the chain connector.

12. Make sure the weight of the chandelier is supported by the chain-not the electrical wire.

\*You may now hang the fixture

**DO NOT EXCEED MAXIMUM WATTAGE RATING!**

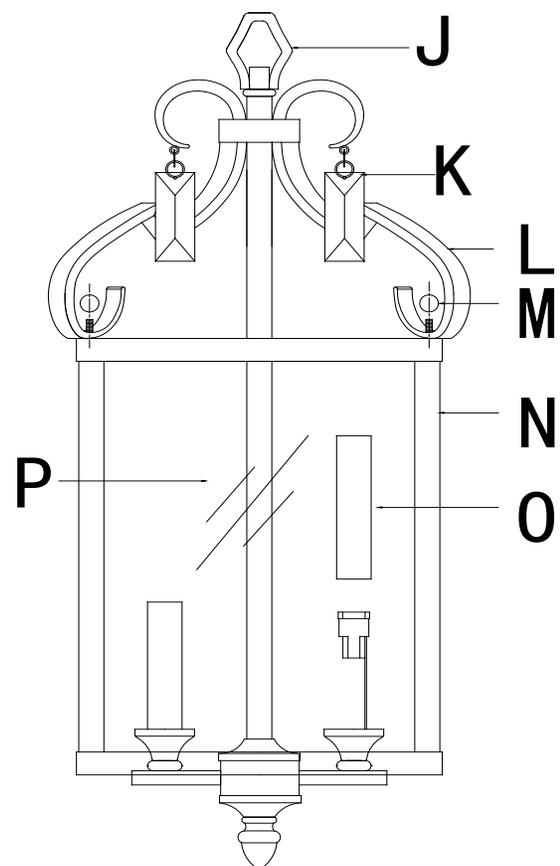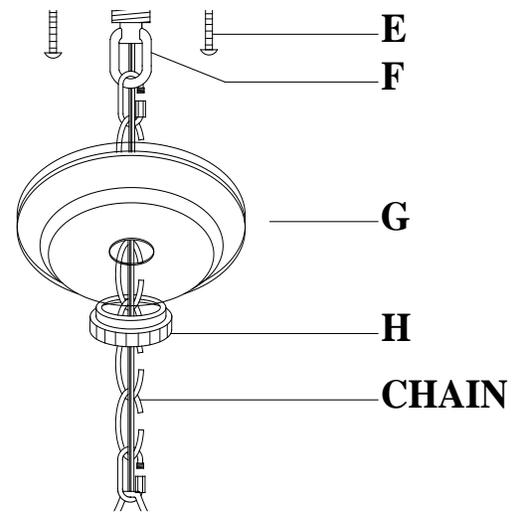Fig 2




**WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.**

## HANGING THE FIXTURE (Fig. 1)

- Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and parts list.
- Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old mounting strap.
- Thread Nipple(C) into Canopy Loop (F) until snug.
- Thread other end of the Nipple (C) with Canopy Loop attached into Mounting Strap (D).
- Place Lock Washer (B) over end of Nipple (C) protruding through Mounting Strap (D) and thread Hex Nuts (A) onto Nipple until tight.
- Take this mounting strap assembly and mount to ceiling junction box with Mounting screws (E). Tighten screw securely with screw driver.
- Unscrew the Canopy loop collar(H) from the Canopy loop. Take the canopy and pass over the Canopy loop. approximately one half of the canopy loop exterior threads should be exposed. Adjust until desired height is reached. \*the Canopy loop collar should fit snugly on the Canopy loop after the canopy is installed. Remove Canopy and Canopy lock collar.
- Assemble the fixture and have an assistant or secure support hold the weight of the fixture while you complete the wiring connections.
- Thread the fixture wires and ground wire of the assembled fixture through the canopy loop and nipple and into the outlet box.

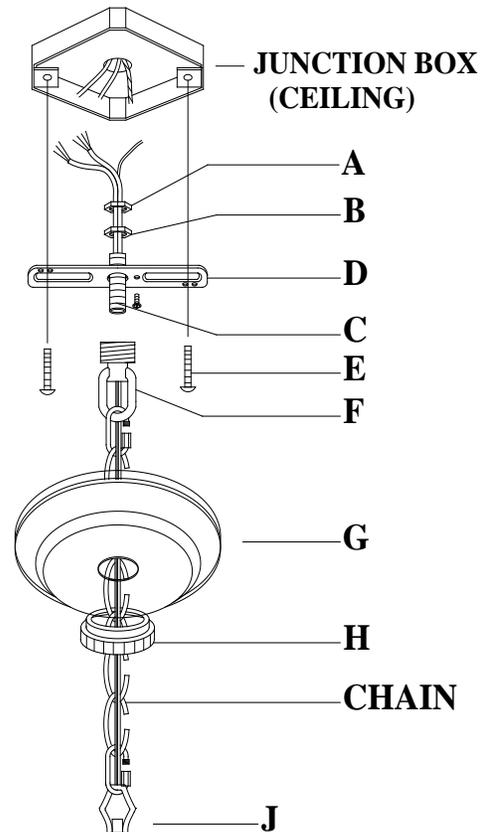
Fig. 1



## CONNECTING THE WIRES (Fig 2)

- Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
  - Attach the GROUND wire(GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (D) or connect both wires together using the correct size of wire connectors.
- NOTE:** Twist the wires together in the same direction you twist the wire connector onto the wires.
- Tuck these wire connections neatly into the Junction Box.

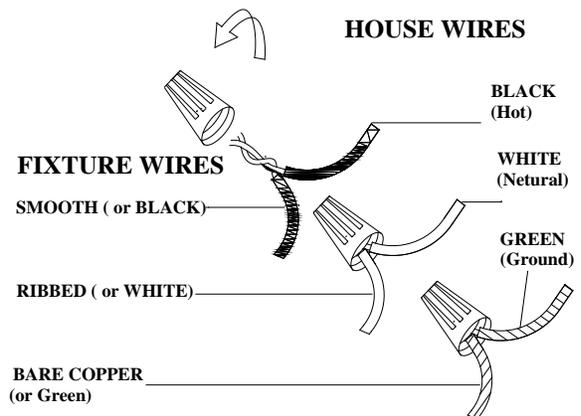Fig. 2



## FINISHING THE INSTALLATION

- Raise the Canopy (G) to the ceiling. Secure in place by tightening the Canopy Loop Collar (H) onto the Canopy Loop (F).

**YOUR INSTALLATION IS NOW COMPLETE.  
RETURN POWER TO THE JUNCTION BOX AND  
TEST THE FIXTURE.**