



PARTS & ASSEMBLY SHEET










Fixture Name: Pallo 4081-M1L SBZ

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____
to be filled out by retailer

Canopy 1ea Ø5-1/4"*H1" 	Mounting Screws 2ea 8#32-IP*1" 	Mounting Strap 1ea Ø4"*H2mm 
Wire connectors 3ea P3 Orange 	Mounting Screws 2ea 5/32-IP*1-1/2" 	Hex Nut 2ea 5/32-IP*H3mm 
Rod 3ea Ø12.5*H12" 	Rod 1ea Ø12.5*H6" 	Deco Nut 2ea 5/32-IP*H9mm 

Part Needed _____	Quantity _____
Part Needed _____	Quantity _____
Reason why (missing, scratched, broken glass, bent, bad finish) _____	
Comments _____	

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. By measuring determine correct number of rods needed for proper hanging height. There are 3 optional 12" rods and 1 6" rod included. To shorten the fixture slide the extra rods off the wire. To lengthen the fixture thread the additional rods onto the wire.

2. Pull the fixture's wire through the Rods (G).

3. Thread Rod/rods (G) into Fixture frame (H) turning until tight, repeat for the additional rods. Thread the Swivel assembly (F) to the Rod (G).

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

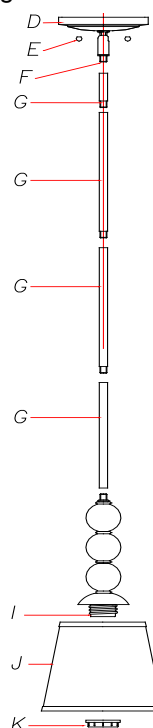
4. Place the fabric Shade (J) over the Threaded Socket (I) and secure by threading the Socket Ring (K) to Threaded Socket (I) until tight.

5. Install the light bulb in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING)

4081-M1L SBZ

Fig 1



These three Rods may be removed or additional Rods may be added.
ROD-12 SBZ *
*available for

For Customer Service, contact the place of purchase to arrange for replacement parts.

4081Series Instructions-20120604m.xlsx



INSTALLATION INSTRUCTIONS

Fixture Name: **Pallo 4081-M1L SBZ**

For **Mini Pendant Light Fixture**

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. The Mounting bracket (C) contains several pairs of threaded holes, find the pair of holes that match the hole spacing in your fixture Back Plate (N) and thread the two Mounting Screws (B) half way into the Mounting Strap (C) facing down, these will have their threaded ends protrude through the two holes in the fixture canopy (N).
4. Place the Mounting Strap (C) over the junction box
5. Attach the Mounting Strap (C) to the Junction Box using the two mounting screws (E). Tighten the screws (E) securely with screw driver.

CONNECTING THE WIRES (Fig. 2)

6. Attach the power supply wires to the fixture lead wires by connecting **BLACK** to **BLACK** (or **SMOOTH**) and **WHITE** to **WHITE** (or **RIBBED**).
 7. Attach the **GROUND** wire(**GREEN** or **COPPER**) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (E) or connect both wires together using the correct size of wire connectors.
- NOTE:** Twist the wires together in the same direction you twist the wire connector onto the wires.
8. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSALLATION (Fig. 3)

9. Place the fixture's canopy over the Mounting bracket (C), adjust the canopy (N) until the Mounting Screws (B) protrude out from the canopy (N) and secure by threading the Decorative nuts (O) on until tight.
 10. Install the light bulbs and glass shade as per the fixture assembly sheet.
- YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.**

Fig. 1

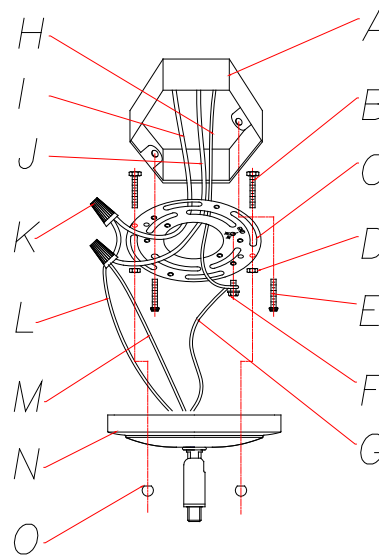


Fig. 2

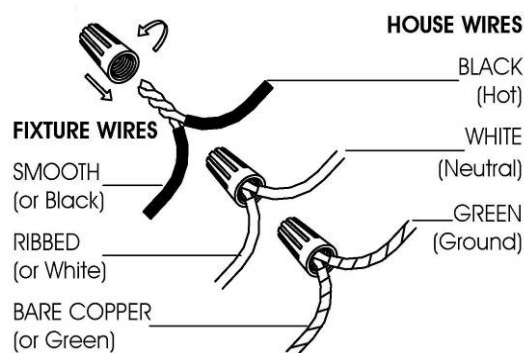
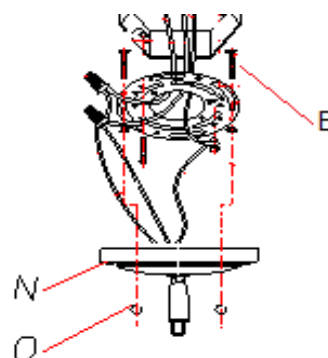


Fig. 3



For Customer Service, contact the place of purchase to arrange for replacement parts.