



## Instructions for electrician STEPS 2 - 21

**WARNING:** THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF AN OUTLET BOX.

**WARNING:**





Electrical Danger




Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

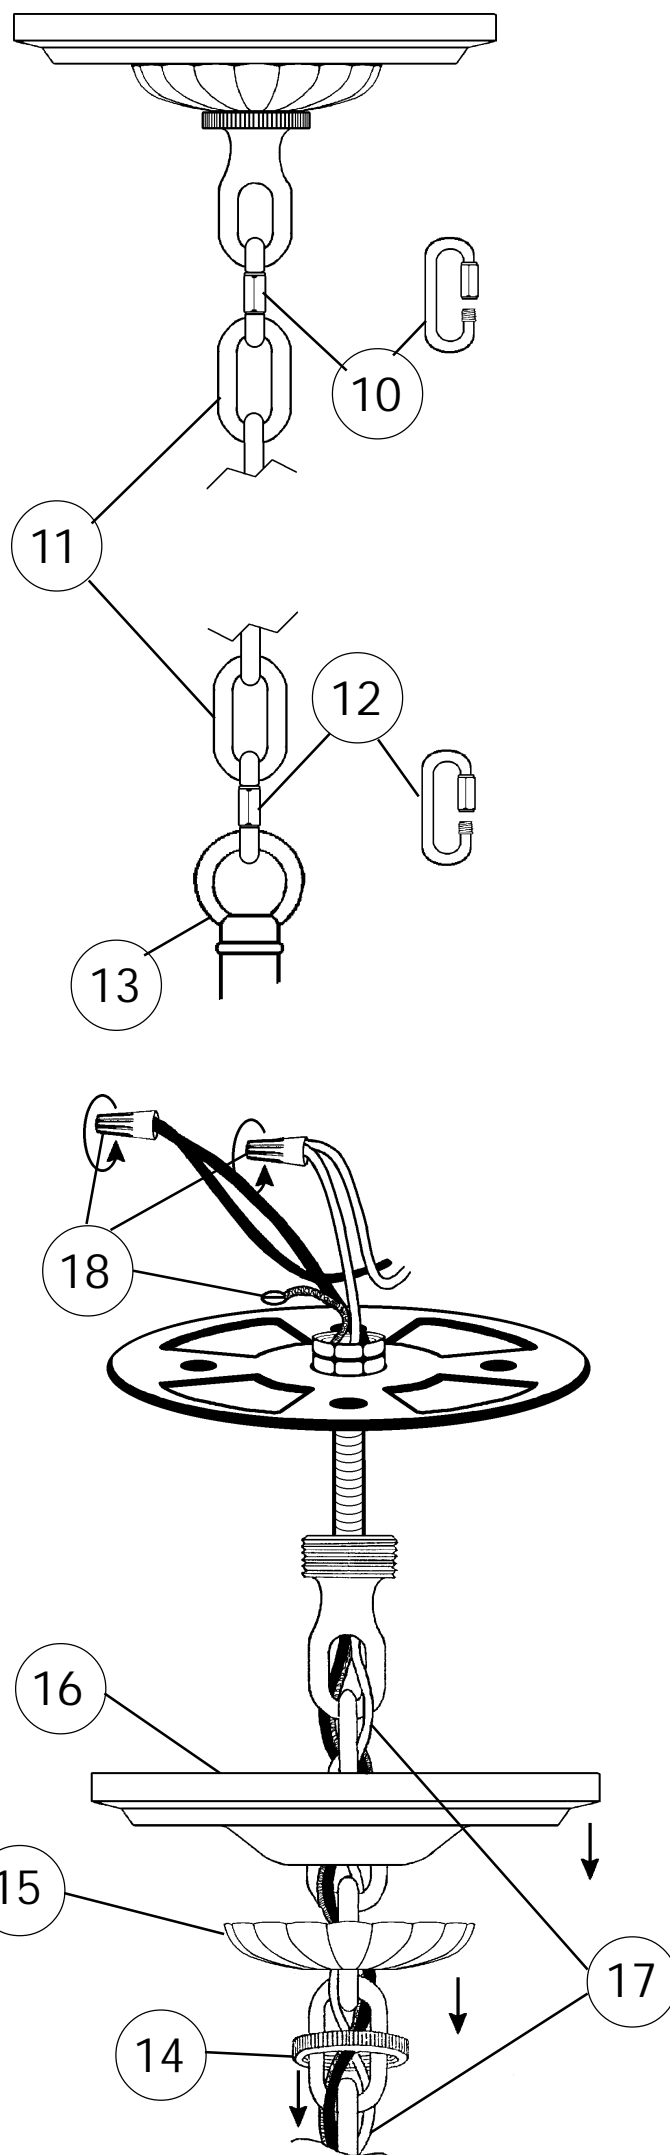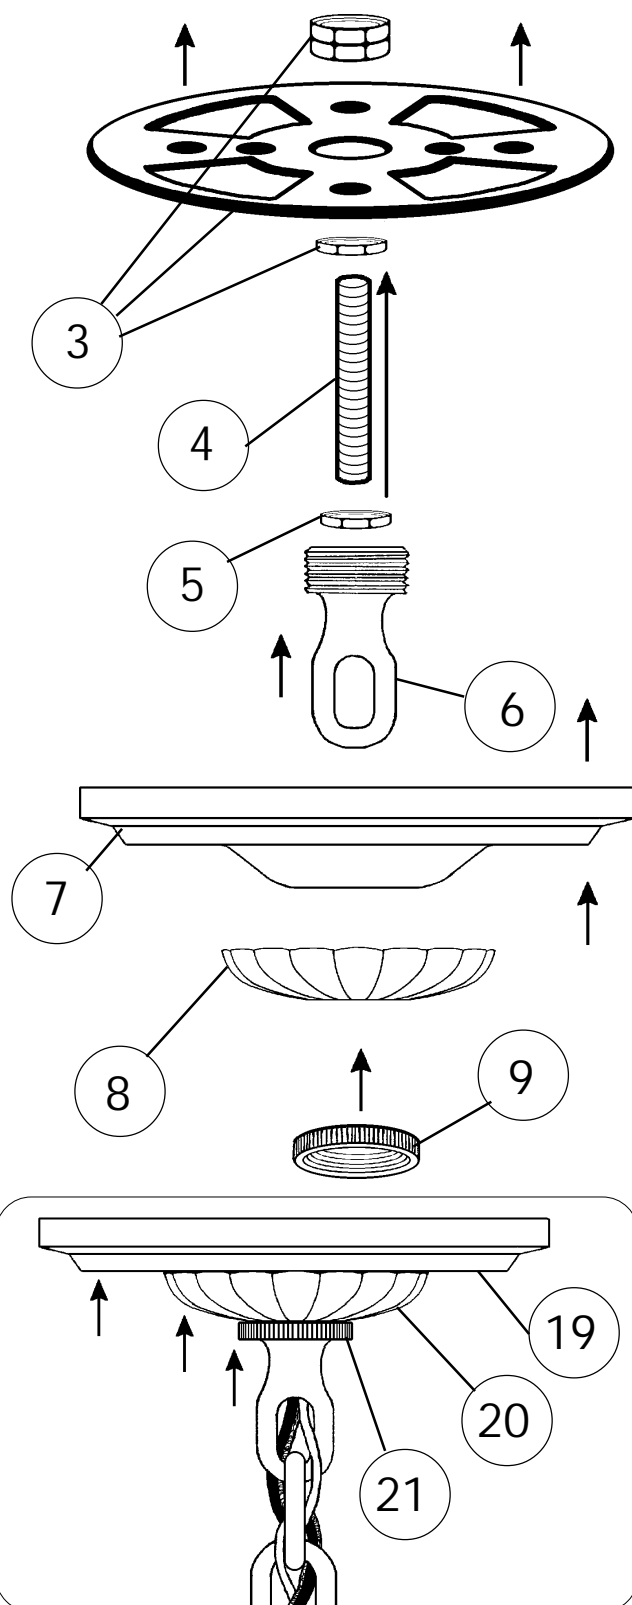

## CHANDELIER 3722-\_\_\_ \_\_A TRIM DIAGRAM

(Finish Option)

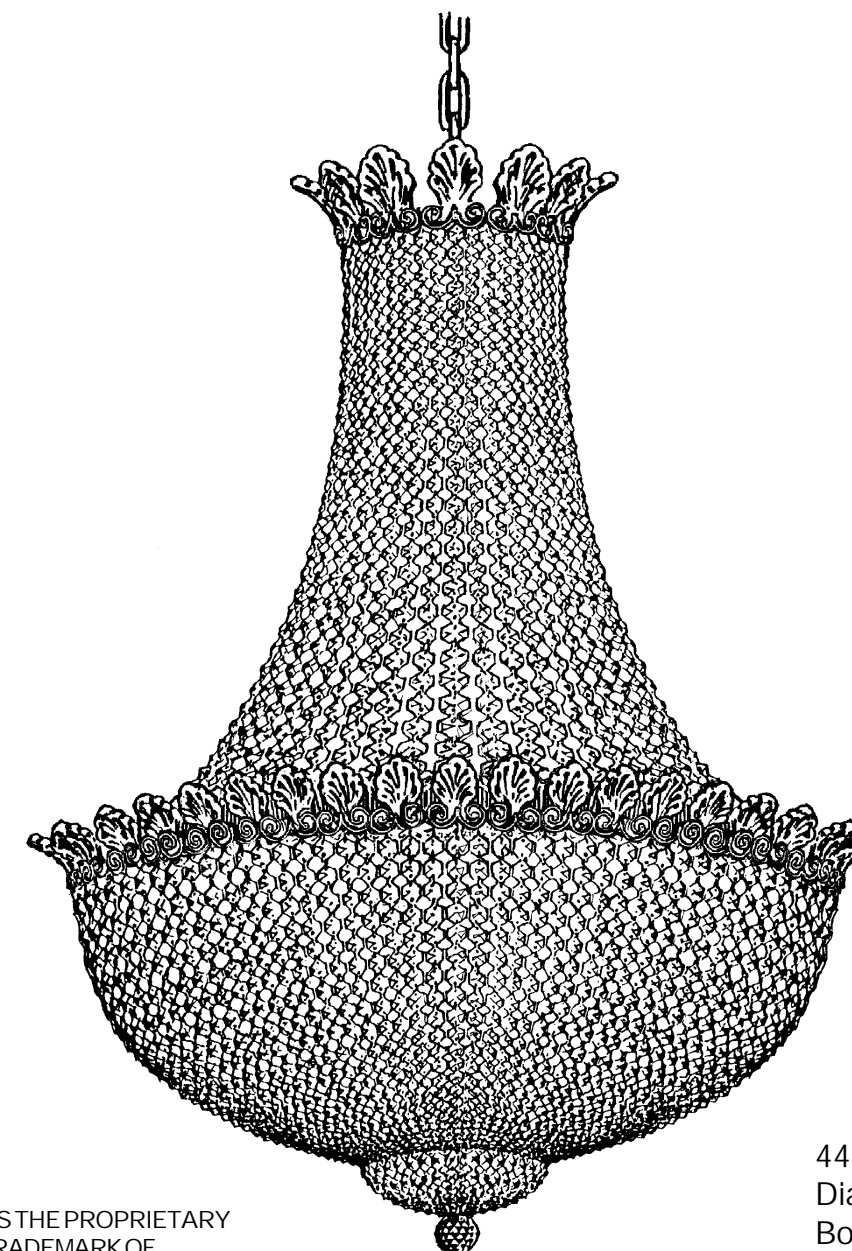

THIS DESIGN IS THE PROPRIETARY TRADE DRESS/TRADEMARK OF SCHONBEK WORLDWIDE LIGHTING INC.

44 Lights  
Diameter: 40"  
Body Length: 49-1/2"  
Hanging Weight: 85 lbs.

# SCHONBEK®

See diagram on back page  
Follow steps in exact order  
Save this trim diagram for future reference


**IMPORTANT**  
1 Person who opens carton should record the following information for future service.  
CODE # \_\_\_\_\_ Four-digit number on outside of carton.  
PACKER # \_\_\_\_\_ See crystal package label.  
ORDER # \_\_\_\_\_ See crystal package label.

SCHONBEK IS A WORLD LEADER IN CHANDELIER DESIGN. PATENTS INCLUDE:  
#D5,222,805 & #D5,588,744

# Instructions for crystal trimming



## STEPS 22 - 27



22

You will need 44 - C10  
25 Watts Recommended  
60 Watts Max

Install bulb and be sure to test  
fixture BEFORE trimming.

Install leaves with half ball.

1. Screw half ball onto running thread.
2. Slide running thread thru gallery and leaf.
3. Adjust leaf to sit up and down (make sure leaf doesn't lean right or left).
4. Tighten leaf to gallery using thumb nut onto running thread.

23

FLAT SIDE  
FACES  
FRONT

THUMB NUT

GALLERY

HALF BALL


RUNNING  
THREAD

#9580/100

Gently remove tissue  
paper from the inside of  
the Crystal Finial.

26

PAPER

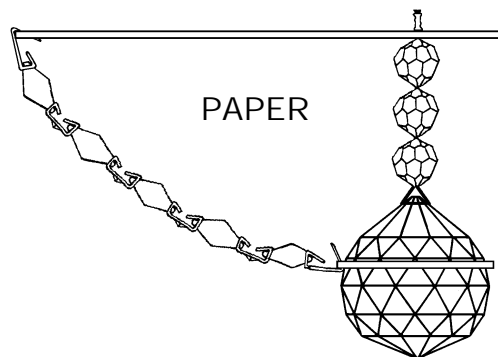

Small Jewel  
At Top

24

A

Large Jewel  
At Bottom

Large Jewel  
At Top

25

Hook the bottom of Chain  
"B" into the gallery of the  
Crystal Finial as  
indicated

27

Small Jewel  
At Bottom

CRYSTAL  
FINIAL