


SCHONBEK®

CHANDELIER 2407 TRIM DIAGRAM

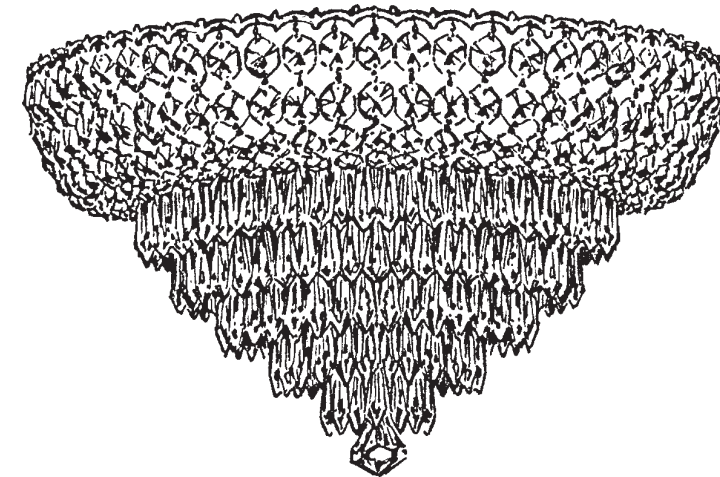

THIS DESIGN IS THE PROPRIETARY
TRADE DRESS/TRADEMARK OF
SCHONBEK WORLDWIDE LIGHTING
INC.

4 Lights
Diameter: 15"
Body Length: 9-1/2"

SCHONBEK®

This fixture was designed and manufactured in Plattsburgh, N.Y. Our high-quality crystal fixtures are made with state-of-the-art manufacturing equipment. If you have any questions about this or any of our more than 450 crystal products, contact your nearest authorized Schonbek distributor.

CAUTION... RISK OF ELECTRICAL SHOCK. Make sure the electrical supply to the chandelier is turned off at the main fuse or circuit breaker before doing any installation. All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

HANGING WEIGHT: 8 pounds.

BULBS: 4 - Globe shaped chandelabra base G16-1/2 bulbs, recommend 25 watts for best appearance.

40 - Watts Maximum

MIN 75°C SUPPLY CONDUCTORS

WARNING: This chandelier meets UL/CSA requirements. Any tampering will void UL/CSA certification.

**Follow steps in exact order
Save this trim diagram for future reference**

IMPORTANT

Please record the following information for future service.

CODE	#	_____	Four-digit number on outside of carton.
PACKER	#	_____	See crystal package label.
ORDER	#	_____	See crystal package label.

MAINTENANCE:

Use a soft, lint - free cloth to clean the metal frame.

**UNDER NO CIRCUMSTANCES
SHOULD METAL POLISHES, CLEANERS,
ABRASIVES OR AEROSOL SPRAYS
BE USED.**

While the latest finishing techniques have been used on the metal frame, such finish cannot be unconditionally guaranteed. The main cause of deterioration, apart from certain atmospheric conditions, is improper cleaning.

To clean the crystals, polish with a damp chamois.


You are cleaning delicate jewelry... Take the greatest care.

IMPORTANT:

Do not clean crystals in a dishwasher. The finish of the metal clips and hangers will be ruined and the crystals may be damaged.

SCHONBEK IS A WORLD LEADER IN CHANDELIER DESIGN.
PATENTS INCLUDE:
#5,205,644

INSTALLATION OF CHAINS "D"

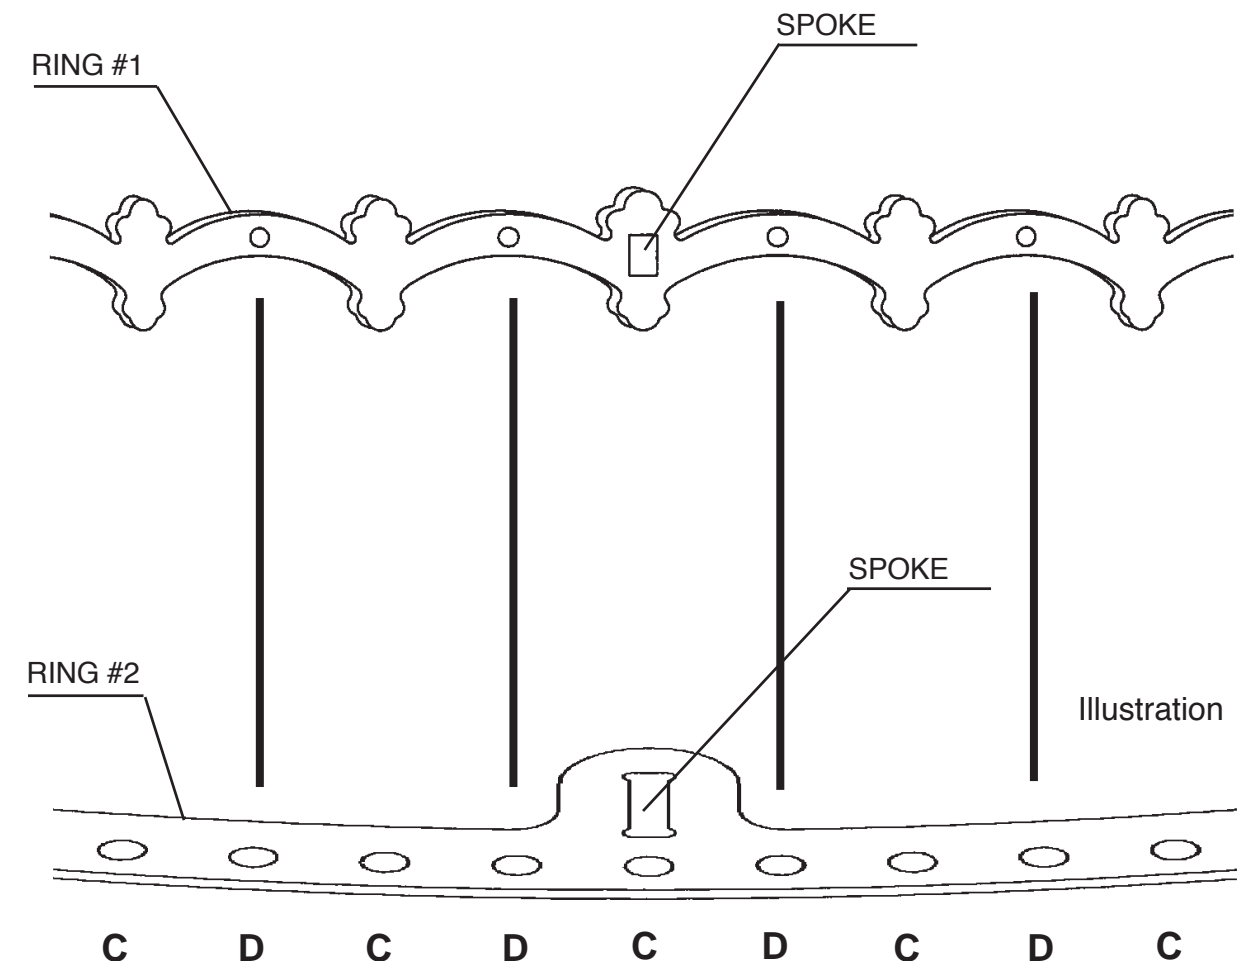

- STEP 1: Start hanging Chains "D" into the pin holes on either side of the spoke of the decorative gallery ring (ring #1). See illustration.
NOTE: Larger jewels at top and graduates to smaller jewels toward bottom of chain.
- STEP 2: Hook the other end into every other pin hole on either side of the spoke on ring #2. See illustration.
- STEP 3: Allow Chains "D" to hang in vertical position and not to the right or left.
- STEP 4: Proceed to next step on trim diagram on page 4.

INSTALLATION OF CRYSTALS "B"

STEP 1: Hook Crystal "B" into the curve of the "scalloped" ring. Hold hook with index finger and thumb. Slide hook from behind scalloped rings #6, #5, #4 & #3. See illustration 1.

STEP 2: Allow Crystals "B" to hang in vertical position and to hang freely. See illustration 2.

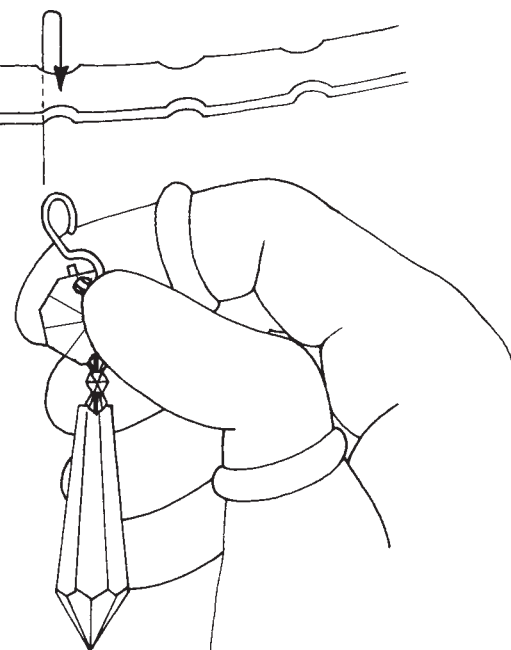


Illustration 1



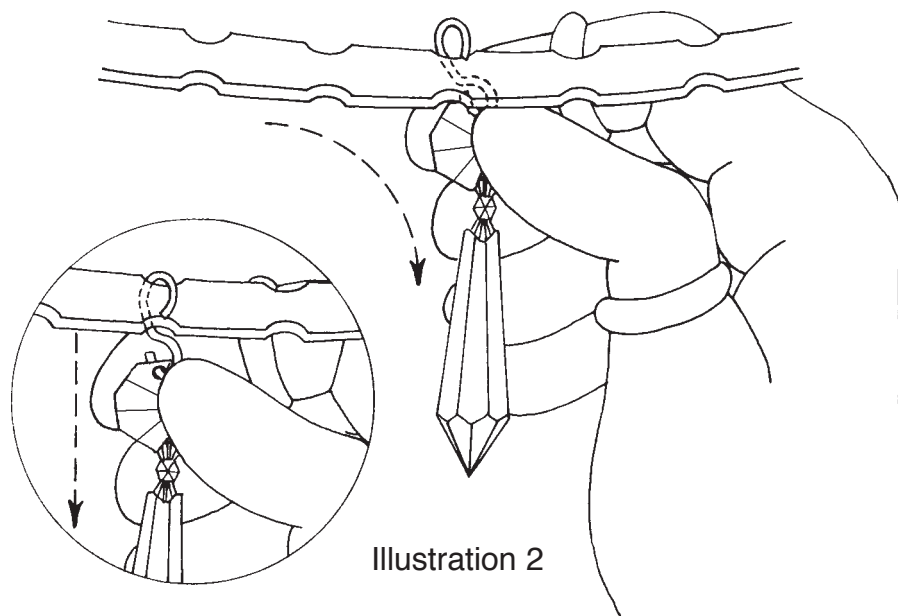


Illustration 2

STEP 3: Proceed to next step on trim diagram on page 4.

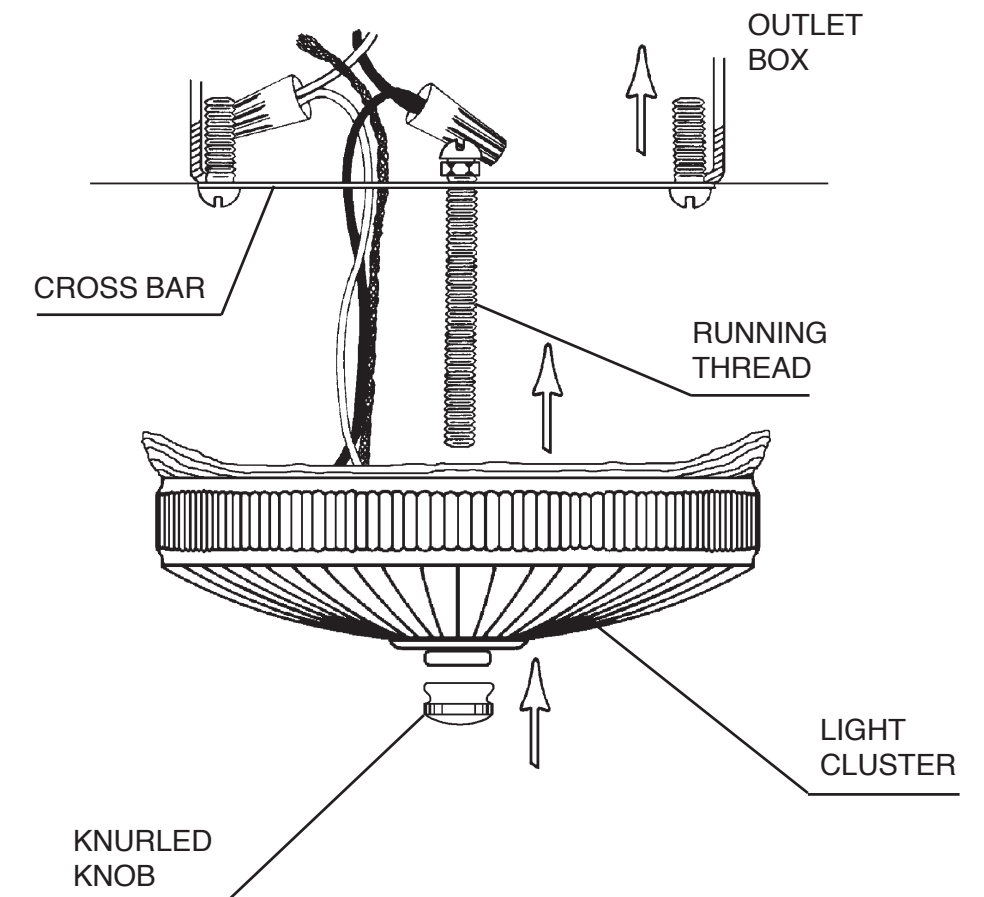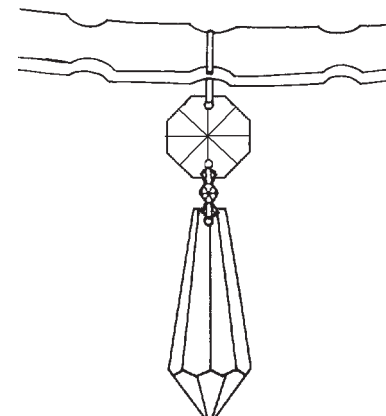

1 MAKE SURE POWER IS DISCONNECTED!!


2 Remove crossbar from light cluster and attach crossbar (see detailed illustration) to outlet box (screws not supplied).

3 Again, make sure that power to the outlet box is disconnected. Feed stem wires through cross bar and attach to power wires in outlet box. Fixture **MUST** be grounded.

4 Slide assembled parts - gallery ring together with chrome reflector (insulation pad above) and light cluster over running thread attached to crossbar and secure with knurled knob. Make sure entire assembly is firmly against the ceiling. If the outlet box is not flush with ceiling, it may be necessary to adjust the thread attached to crossbar.

5 Install bulbs and test power to insure proper wiring before hanging trim from fixture.

DIAGRAM #1

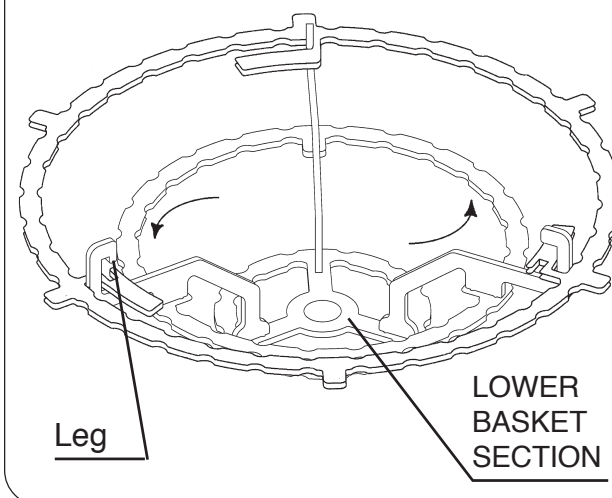


6 TEST POWER TO INSURE PROPER WIRING BEFORE HANGING CRYSTAL ON FRAME.

7 **Installation of lower bottom section to frame basket:**
Raise, rotate and lower basket until leg falls into notch. This will prevent bottom basket from falling accidentally. See diagram #1 for detailed instructions.

To relamp fixture:

Raise, rotate and lower basket section to remove from frame.

8 Screw Finial "A" onto the bottom of the frame. Tighten set screw with supplied tool to lock ball into position.

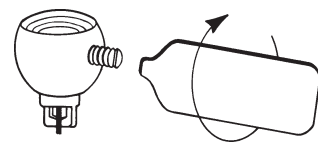

9 Hook Drops "B" into ring #6, #5, #4 and #3. See page 6 for detailed instructions.

10 Hook Chains "D" into the pin holes of the decorative gallery ring (ring #1). See page 7 for detailed instructions.

11 Hook Drops "C" into every other pin hole on ring #2. NOTE: Drops "C" hang between Chains "D".

