

# PARTS & ASSEMBLY SHEET





Fixture Name: Zura 5010-M3/D5/6/9 MW

This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

## PARTS LIST

Company Name: \_\_\_\_\_ Co Account#: \_\_\_\_\_  
below to be filled out by retailer

Mounting Strap W103*T2.0 mm 1ea		Green Screw G8/32*H8 mm 1ea		Mounting Screws H32 mm 2ea H38 mm 2ea	
Wire Connectors Orange 3ea		Hex Nut G5/32*H4 mm 2ea		Deco Nut Φ 12 mm 2ea	
Part Needed _____		Quantity _____			
Part Needed _____		Quantity _____			
Reason why (missing, scratched, broken glass, bent, bad finish)					
Comments _____					

## FIXTURE ASSEMBLY INSTRUCTIONS


**Read and review installation instruction sheet before assembling the fixture**

- By measuring determine correct number of rods needed for proper hanging height.  
\* This fixture includes 4 rods (6", 12", 12", 12")
- To shorten the fixture; slide the excess rods off the wires. To lengthen add additional rods.
- Pull the fixture's wires through the rods until taut and thread the rods together. Then thread to the fixture coupler (I) at top of fixture and the swivel joint on Canopy. (D)
- Place the Glass Shade (F) and Small Glass Shade (J) over the Threaded Socket (G).
- Holding the Small Glass Shade (J), and secure it by threading the Socket Ring (H) onto the Threaded Socket (G) until tight.
- Install the light bulbs in accordance with the fixture's specification.  
(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

**NOTE: INSTALL THE GLASS ASSEMBLY AFTER FIXTURE IS HUNG.**

5010-M3/D5/6/9 MW

Fig.1

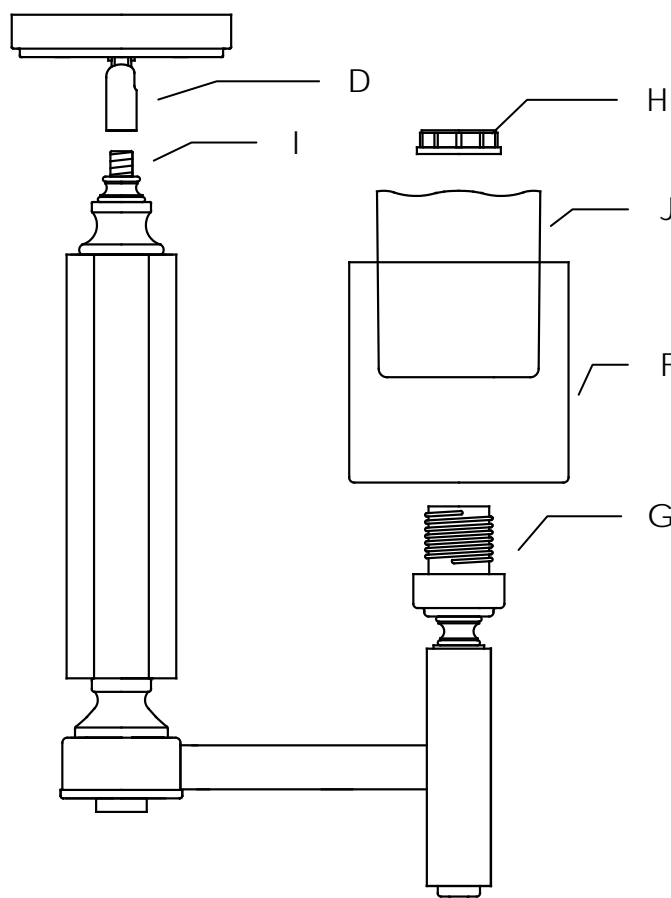

# PARTS & ASSEMBLY SHEET



Fixture Name: Zura 5010-M3/D5/6/9 MW

This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

## PARTS LIST

Company Name: \_\_\_\_\_ Co Account#: \_\_\_\_\_  
below to be filled out by retailer

Mounting Strap W103*T2.0 mm 1ea		Green Screw G8/32*H8 mm 1ea		Mounting Screws H32 mm 2ea H38 mm 2ea	
Wire Connectors Orange 3ea		Hex Nut G5/32*H4 mm 2ea		Deco Nut Φ 12 mm 2ea	
Part Needed _____		Quantity _____			
Part Needed _____		Quantity _____			
Reason why (missing, scratched, broken glass, bent, bad finish)					
Comments _____					

## FIXTURE ASSEMBLY INSTRUCTIONS

**Read and review installation instruction sheet before assembling the fixture**

- By measuring determine correct number of rods needed for proper hanging height.  
\* This fixture includes 4 rods (6", 12", 12", 12")
- To shorten the fixture; slide the excess rods off the wires. To lengthen add additional rods.
- Pull the fixture's wires through the rods until taut and thread the rods together. Then thread to the fixture coupler (I) at top of fixture and the swivel joint on Canopy. (D)
- Place the Glass Shade (F) and Small Glass Shade (J) over the Threaded Socket (G).
- Holding the Small Glass Shade (J), and secure it by threading the Socket Ring (H) onto the Threaded Socket (G) until tight.
- Install the light bulbs in accordance with the fixture's specification.  
(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

**NOTE: INSTALL THE GLASS ASSEMBLY AFTER FIXTURE IS HUNG.**

5010-M3/D5/6/9 MW

Fig.1

