

INSTALLATION INSTRUCTIONS

Fixture Name: CLARION 6530-1W CH


For Wall Mount Light Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow parts bag. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. The Mounting Strap (A) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture Back Plate (D) and thread the Nipple (C) half way into the Fixture Mounting Strap (A).
4. Place the Mounting Strap (A) over the Junction Box, as required by the fixture type.
5. Attach the Fixture Mounting Strap (B) to the Junction Box using the two Mounting Screws (B). Tighten the Screws (B) securely with screwdriver.

Fig. 1

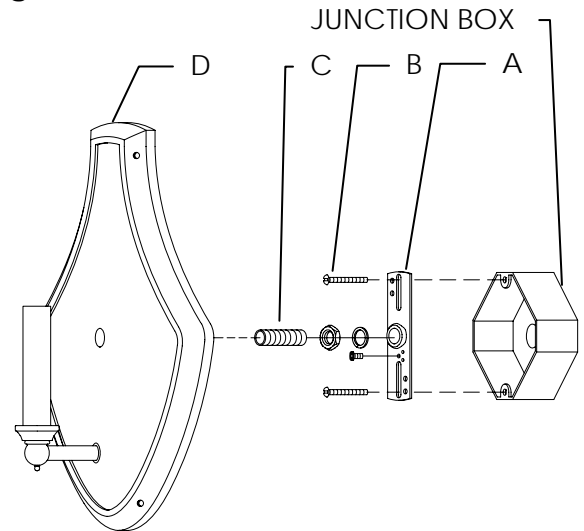


CONNECTING THE WIRES (Fig.2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (B) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

8. Tuck these wire connections neatly into the Junction Box.

Fig.2

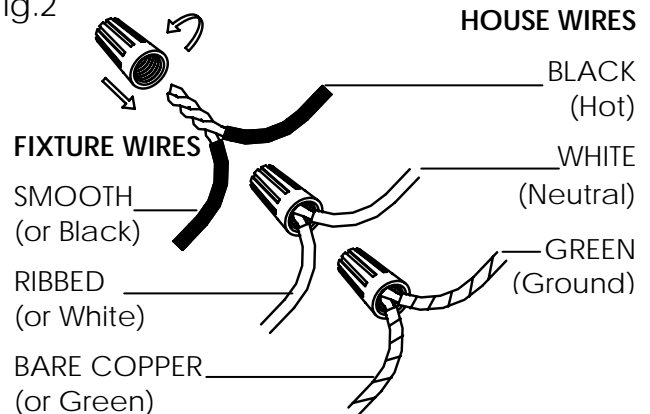


FINISHING THE INSTALLATION (Fig.3)

9. After tucking these wire connections neatly into the Junction Box and place the fixture Back Plate (D) over the Nipple (C) and secure the Back Plate (D) against the wall by threading Deco Nuts (E) over the Nipple (C) until tight as shown on Fig.3.
10. Install glass as per the fixture assembly instructions.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig.3

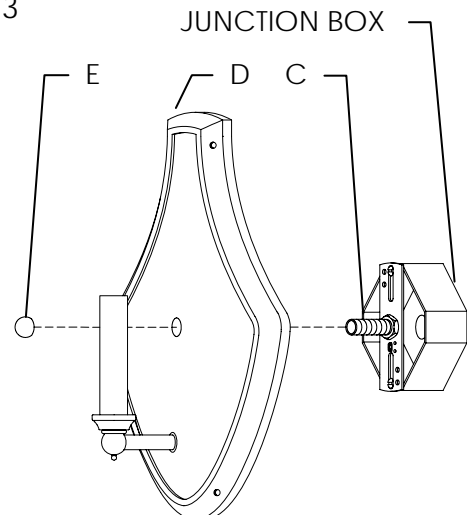

PARTS & ASSEMBLY SHEET





Fixture Name: CLARION 6530-1W CH

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co Account#: _____
below to be filled out by retailer

Mounting Strap 1ea H98 mm		Green Screw 1ea G8/32*H8 mm		Mounting Screws 2ea H32 mm	
Wire Connectors 3ea Orange		Hex Nut 1ea H4 mm		Deco Nut 1ea Φ15 mm	
Nipple 1ea H45 mm		Ball Screw 4ea Φ9 mm		Crystal (H&J) 2ea H48 mm 1ea H74 mm	

Part Needed _____ Quantity _____

Part Needed _____ Quantity _____

Reason why (missing, scratched, broken glass, bent, bad finish)

Comments _____

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture

1. Place the Arm (G) onto the Back Plate (D) and secure with Ball Screw (K) and washer.
2. Place Crystal (H) and Crystal (J) onto the body as show.
3. Place the glass Cup (Bobèche) (F) over the Candle Cover (L).
4. Install the light bulbs in accordance with the fixture's specification.
(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER FIXTURE IS HUNG.

6530-1W CH

Fig.4

