







Fixture Name: Accurian 7158-M1L PW/RBZ

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST		Company Name: _____ Co. Account #: _____ to be filled out by retailer	
Mounting Strap w/ ground screw 1ea 102X76.2X3mm		Wire Connector 2ea P3 Orange	
Canopy 1ea Φ115X19mm		Hex Nut 2 ea 5/32"*H3.5mm	
Mounting screw 2ea 5/32-32NX28mm		Deco Nut 2ea Φ11.6X10.8mm	
Junction Box Screw 2ea 8/32"x1"		Nipple 4 ea 3/8-27NX20mm	
Rod 3 ea Ø1/2"*H12"		Socket Tool 1 ea	
Part Needed _____		Quantity _____	
Part Needed _____		Quantity _____	
Reason why _____	(missing, scratched, broken glass, bent, bad finish)		
Comments _____			

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. For adjusting the height of fixture, this fixture contains 12" Rod x 3pcs . First decide the height required and thread the Nipple(G) inside of Rods(H).

2. Pull the fixture wire through Rods and connect the Rods (H) and Nipples (G) together. Pull fixture wire until taut.

3. Thread the rods to fixture frame (I) and Canopy(E).

* You may now install the fixture


5. Slide Glass Shade (J) to Socket (I) and tighten the Socket Ring (K) using the socket tool (L)

6. Install light bulb in accordance with fixture's specifications.

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

7158-M1L PW/RBZ

Fig. 1

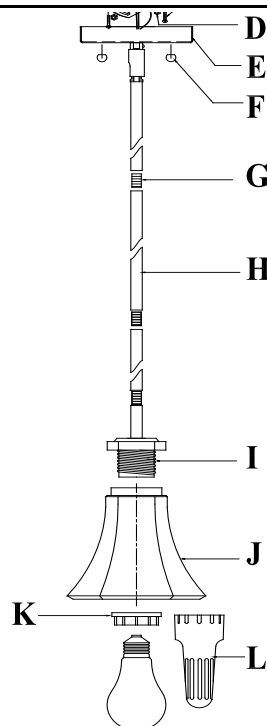

For Customer Service, contact the place of purchase to arrange for replacement parts.

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.

2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.

3. The Mounting Strap(B) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your Canopy(E) and Thread two Mounting Screws (A) into the Mounting Strap (B). Secure with Hex nuts (D).

4. Attach Mounting Strap (B) to the Junction Box by using the two Junction Box Screws (C). Tighten the screws securing with screw driver!

CONNECTING THE WIRES (Fig. 2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED) .

6. Attach GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the Green Ground Screw on the Mounting Strap (B) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

7. Tuck these wire connections neatly into the ceiling Junction Box.

FINISHING THE INSTALLATION (Fig. 3)

8. Place the fixture's Canopy (E) over the Mounting Strap (B) and over the Mounting Screws (A), adjust the fixture Canopy (E) and secure the fixture against ceiling by threading the Decorative Nuts (F) until tight.

9. Install the light bulbs and glass shade as per the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE.
RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE

Fig. 1

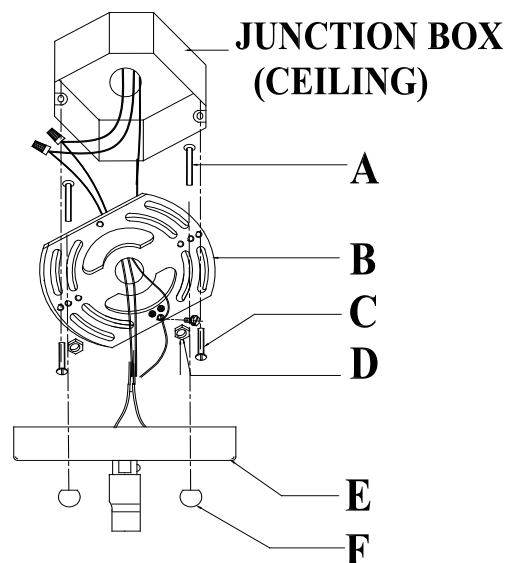


Fig. 2

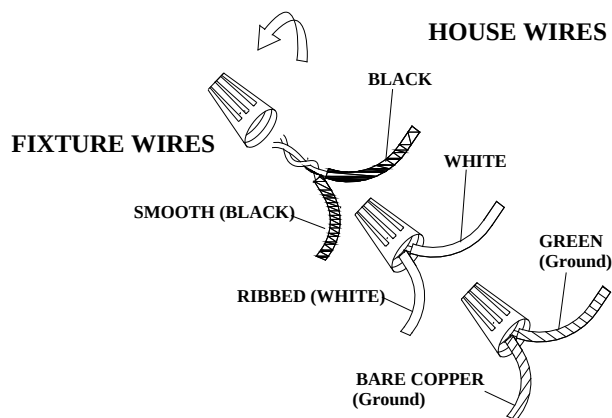


Fig. 3

