

access

LIGHTING

INSTALLATION INSTRUCTIONS

IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.


NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

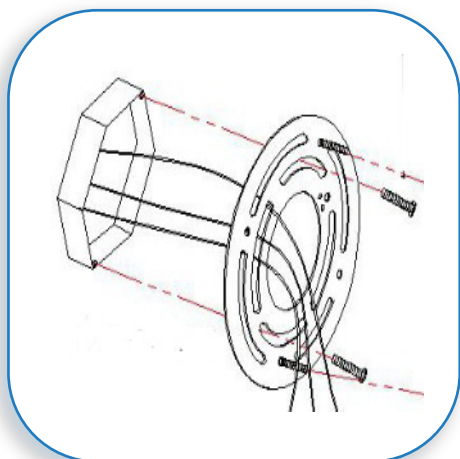

COLLECTION

Aura

APPLICATION

Wall Fixture

MODEL NO.

62273

WHAT WE PROVIDE

- Crossbar
- Mounting Hardware
- Back Plate
- 1 x Metal Shade
- 1 x 100W/J78mm Bulbs
- 1 x Bulb Covers

WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code

MOUNT CROSSBAR

1

If there is an existing fixture remove it.


Mount the crossbar to the junction box with the supplied screws. Make sure that the additional screws face outward.



2

CONNECT THE WIRES


Gently pull the supply wires. Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wires to the white fixture wire. Secure with the supplied wire nuts. Either wrap the green wire around one of the protruding screws or connect it to the supply ground wire. Secure all wire with U.L. Certified electrical tape (not supplied). Tuck all wires carefully into the J-Box.

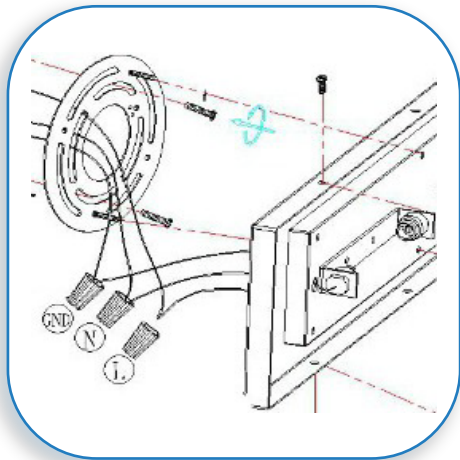

3

MOUNT THE BACK PLATE

Hold the fixture back plate up to the crossbar so that the two additional screws can be placed into the designated holes in the back plate. Secure with the supplied thumb screws.

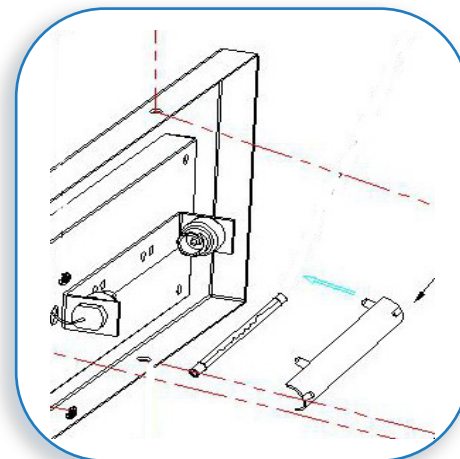

4


INSERT THE BULB

Insert the supplied bulb. Do not handle the bulb with your bare hands, but use the supplied sponge cloth.

MAXIMUM WATTAGE 100W

DO NOT EXCEED THE RECOMMENDED WATTAGE AS STATED ON THE WARNING LABEL AND INSTRUCTION SHEETS.

Snap the supplied bulb covers over the bulb.

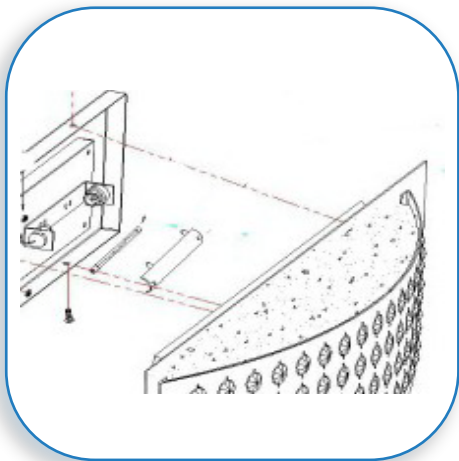

5

SECURE THE METAL SHADE

Secure the metal shade to the fixture, by fitting the shade over the back plate. Align the holes at the top and the bottom of each plate and secure by inserting the supplied screws.



6

RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS FIXTURE

CAUTION

Please ensure that the fitting is cool and switched off before replacing the bulb. DO NOT use bulbs that might exceed the maximum wattage, stated on caution label.