


Drawing 1 - Fixture Assembly

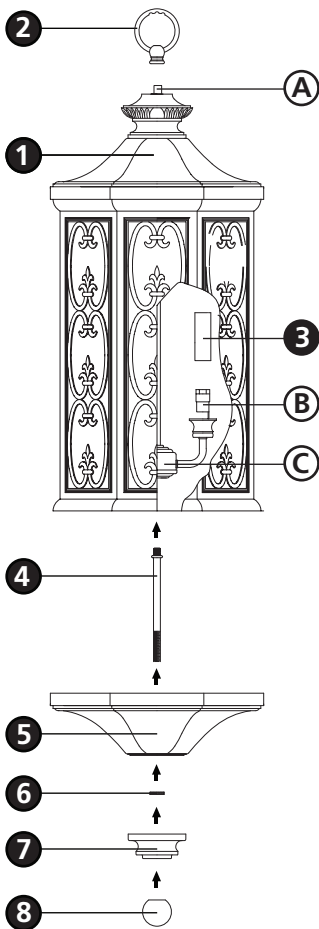

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, and then hanging the fixture from the ceiling.**

2

1. Slip loop (2) down along wire and thread onto nipple (A) on the top of main body assembly (1) - see **Drawing 1**.
2. Slip candle sleeves (3) over sockets (B).
3. Fixture can now be lamped accordingly.
4. Thread lower stem (4) into the bottom of cluster assembly (C).
5. Attach lower cage cover (5) by slipping it over center stem (4) and threading on knurl nut (6) and tighten.
6. Slip cap (7) onto center stem (4) and hold in place.
7. Thread decorative knob (8) onto end of center stem (4).

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

3

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer to the hanging instruction sheet (I.S. 19) provided to complete installation of this fixture.

Note: Maximum wattage for 1232 fixture is 40 watts per bulb.

2.7.08