










Fixture Name: Cerchi 1030-10 CH

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____
to be filled out by retailer

Circular mounting strap	1ea 	Wire connectors	3ea 	Green ground screw	1ea 
Canopy	1ea 	Mounting screw	2ea 	Hex nut	2ea 
Wire lock	2ea 	Junction box screw	2ea 	Deco nut (Round)	2ea 

Part Needed	_____	Quantity	_____
Part Needed	_____	Quantity	_____
Reason why	(missing, scratched, broken glass, bent, bad finish)		
Comments	_____		

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

ASSEMBLING THE FIXTURE (Fig.1)

1. By measuring determine correct length of fixture wire (M) needed for proper hanging height. Pull wire through center Canopy hole and Knot the wire to hold to height desired.

2. To adjust the balance of fixture, loosen the Screws (N) on Wire lock inside the Canopy (E), and pull the Support wire (H) looping through both holes (G). Repeat with the other side to balance the fixture. Check with a level.

*Trim wires only after the height and balance is final!

* You may now install the fixture.

3. Place the Glass Shades (J) over the Threaded Sockets (I), secure with Socket washer (K) and by threading the Socket rings (L) until tight.

4. The decorative rings may be turned to your desired angle.


5. Install the light bulbs in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

1030-10 CH

Fig. 1

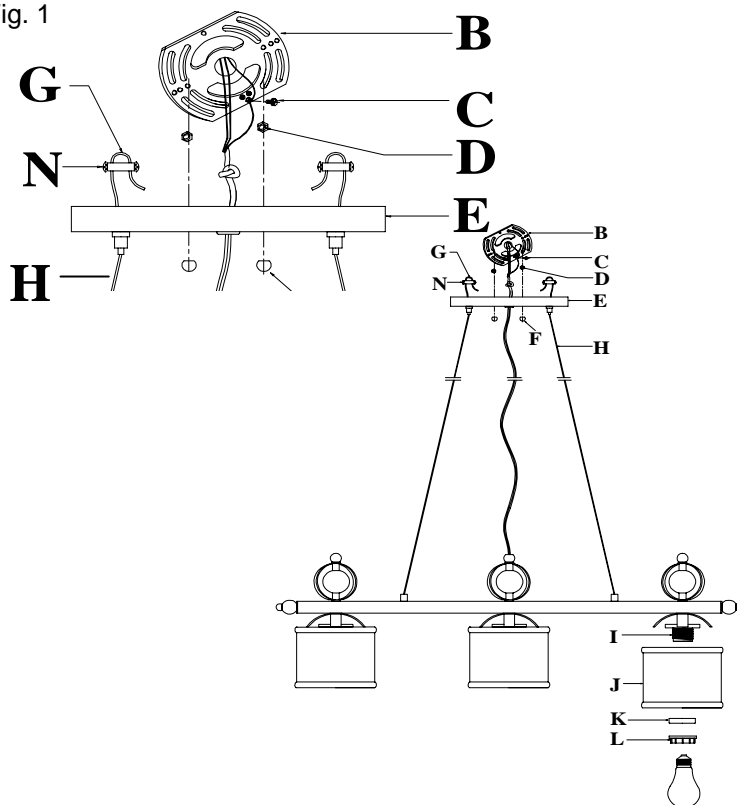


For Customer Service, contact the place of purchase to arrange for replacement parts.

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. The Circular mounting strap (B) contains several pairs of threaded holes, find the pair of holes that match the hole spacing in your fixture Canopy (E) and thread the two Mounting Screws (A) half way into the Mounting strap (B) facing down, secure in place with hex nuts. These will have their threaded ends protrude through the two holes in the fixture Canopy (E).
4. Place the Mounting Strap (B) over the Junction Box so the Mounting Screws (A) are vertical or horizontal, as required by fixture type.
5. Attach the Mounting Strap (B) to the Junction Box by using the two mounting screws (C). Tighten the screws securing with screw driver!! Before connecting the wires, See reverse side for fixture assembly!!

Fig. 1

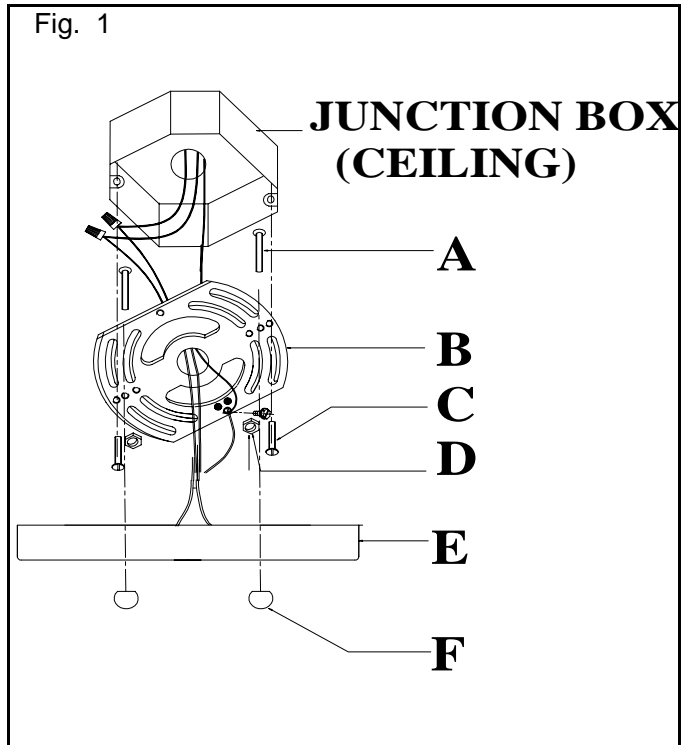


CONNECTING THE WIRES (Fig. 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (B) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

8. Tuck these wire connections neatly into the Junction Box.

Fig. 2

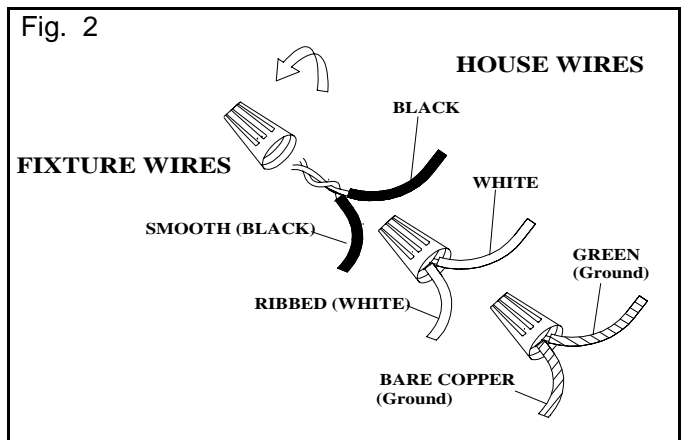

FINISHING THE INSTALLATION (Fig.3)

9. Place the fixture's Canopy (E) over the Mounting Strap (B) and over the Mounting Screws (A), adjust the fixture Canopy (E) until the Mounting Screws (A) protrude out from the Canopy (E) and secure the fixture against the ceiling by threading the decorative nuts (F) until tight.
10. Install the light bulbs and fabric shade as per the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 3

