


Family: Chateau | Item No. 1239 MR




▼ start here

Drawing 1 - Fixture Mounting

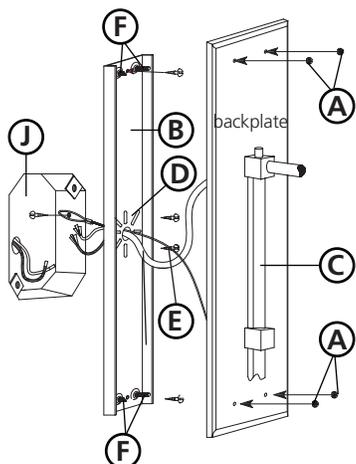

Drawing 2 - Fixture Assembly

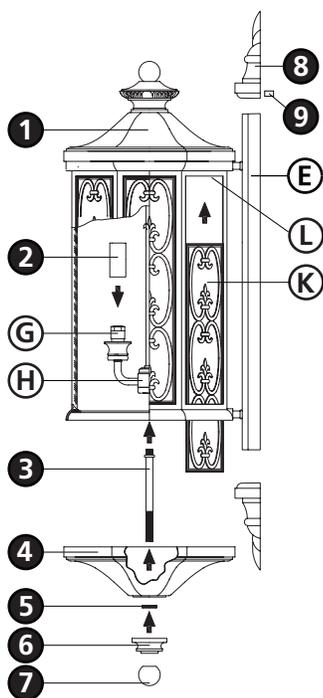

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, mounting the mounting strap to the junction box, and then mounting the fixture to the wall.**

2

1. To assemble fixture, attach decorative ends (**8**) to backplate (**E**) using screws (**9**) - see **Drawing 2**.
2. Take candle sleeves (**2**) and slip them over sockets (**G**).
3. Thread lower center stem (**3**) into bottom of cluster assembly (**H**).
4. Slide glass (**K**) into fixture and secure by bending over glass clips (**L**).
5. After lamping fixture, slip bottom roof (**4**) over center stem (**3**).
6. While holding roof (**4**) in place, thread knurl nut (**5**) onto bottom center stem (**3**) and tighten.
7. Slip cap (**6**) onto center stem (**3**) and hold in place.
8. Thread bottom knob (**7**) onto end of center stem (**3**) and tighten.

3

1. Preparation for mounting of the safety cable to the junction box (**J**) in your wall should be done at this point - see **Drawing 1**.
2. Using a 1/8" diameter drill, drill a pilot hole in the side of the junction box (**J**) that is attached to the wood wall stud. This pilot hole will be the point at which the safety cable will be attached.
3. Remove the four ball knobs (**A**) holding retaining plate (**B**) to the fixture backplate (**C**).
4. Using junction box (**J**) as a reference, determine which knockouts (**D**) should be removed from retaining plate (**B**).
5. Slip safety cable and lead wires through 9/16" dia. hole in retaining plate (**B**).
6. Holding fixture cage assembly (**5**) up to junction box (**J**) attach looped end of safety cable to junction box using a #8 wood screw (not provided).

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

4

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (**I.S. 18**) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

5

1. To mount fixture to the wall, attach retaining plate (**B**) to junction box (**J**) using two 8-32 machine screws (**E**). Two additional mounting points (**F**) at the top and bottom of the retaining plate (**B**) should be anchored to wall (screws not provided) - see **Drawing 1**.
2. Fixture can now be attached to the mounting plate (**B**) using the four ball knobs (**F**), removed from fixture earlier.