












Fixture Name: Sterne 1054-FM ST

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST			Company Name: _____ Co. Account #: _____ to be filled out by retailer
Mounting strap  1ea W3-7/8"E1"10mm	Finial  1ea 1/8-IP"H10mm	Wire connectors  3ea P3 Orange	
Hex Nut  1ea 1/8-IP"H4mm	Bottom cap  1ea Ø3-1/2"H40mm	Mounting Screws  2ea 8#32-IP*1"	
Nipple  1ea 1/8-IP"H135mm	Mounting Screws  2ea 5/32-IP*50	Rubber washer  1ea Ø1-1/2"H2mm	
Iron washer  1ea Ø1-1/2"H2mm	Hex Nut  2ea 5/32-IP"H3mm		
Part Needed _____	Quantity _____		
Part Needed _____	Quantity _____		
Reason why _____	(missing, scratched, broken glass, bent, bad finish)		
Comments _____			


FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. Thread the NIPPLE(K) into the FIXTURE PAN coupling(J) .
2. Install the light bulbs in accordance with the fixture's specifications.
3. Place the GLASS SHADE(L) over the FIXTURE PAN(J) allowing the NIPPLE(K) to protrude through the bottom hole in the glass. Slide the RUBBER WASHER(M) and FLAT WASHER(N) into the NIPPLE(K), and tighten with the HEX NUT(O).
4. Slide the BottomCap(P) onto the GLASS SHADE(L) and tighten with the FINIAL(Q).

(DO NOT EXCEED MAXIMUM WATTAGE RATING!)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

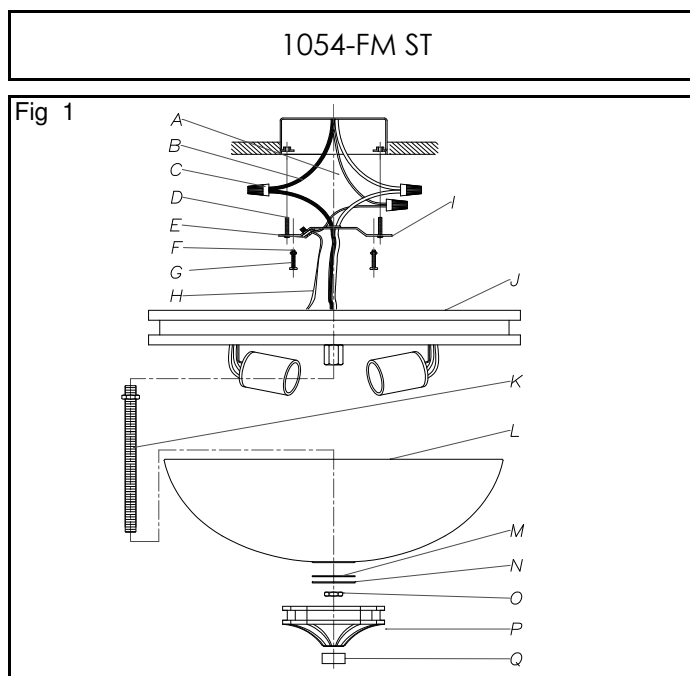

INSTALLATION INSTRUCTIONS

Fixture Name: Sterne 1054-FM ST

For Flush Mount Light Fixture

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. Thread the two Fixture Mounting Screws (G) into the pre-drilled Holes in the Mounting Strap (E) spaced the same distance apart as the holes in the Ceiling Pan. Secure in place with Hex nuts (F).
4. Attach Mounting Strap (E) to the junction box using the two Mounting Screws (D)

CONNECTING THE WIRES (Fig 2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
6. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw (L) on the Mounting Bracket (E) or connect both wires together using the correct size of wire connectors. NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
7. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig.3)

8. Finish mounting the Ceiling Pan (J) by placing it over the Mounting Strap (E) as shown on FIG.1. Rotate the Pan until the Mounting screws (G) protrude through the "Keyholes" located in the bottom of Ceiling Pan (J). Using a screw driver, secure the Ceiling Pan (D) by screwing Mounting Screws (G) until taut.
9. Install the light bulbs in accordance to the fixture's specifications.
10. Install the glass shade as per the assembly instructions.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

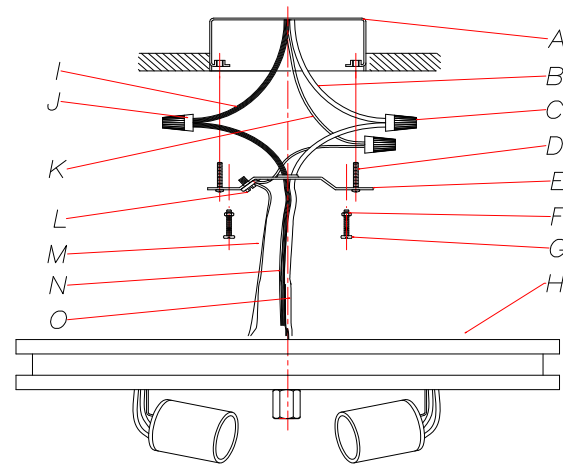


Fig. 2

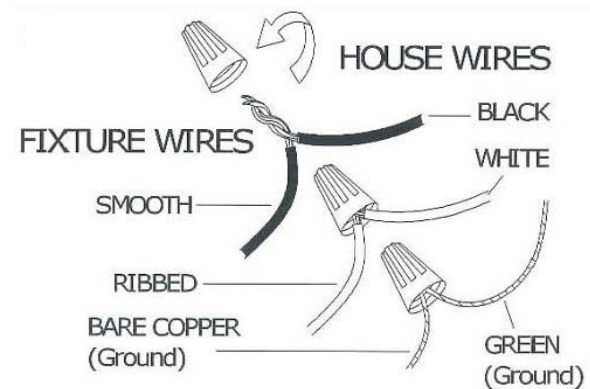


Fig. 3

