










Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____
below to be filled out by retailer

Mounting Strap (A)  1 ea 3/4"*1"	Junction Box Screw (B)  2 ea #8-32N*H32mm	Nipple (C)  1ea 3/8"*H45mm
Wire Connector  3 ea P3	Hex Nut  2 ea 5/32"*H3.5mm	Deco Nut (Round) (I)  1 ea 5/32"xH12mm
Green Ground Screw  1 ea #8-32N*H10mm	Crystal (J)  2 ea W21*75Lmm	Candle Sleeve (H)  2 ea W32xH95mm

Part Needed _____ Quantity _____

Part Needed _____ Quantity _____

Reason why (missing, scratched, broken glass, bent, bad finish)

Comments _____

FIXTURE ASSEMBLY INSTRUCTIONS


Read and review installation instruction sheet before assembling the fixture.

1. Slide the candle sleeve (H) over Socket
2. Attach the Crystals (J).
3. Install light bulb to Socket in accordance with the fixture's specifications.

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

2049-2W FB

Fig. 1

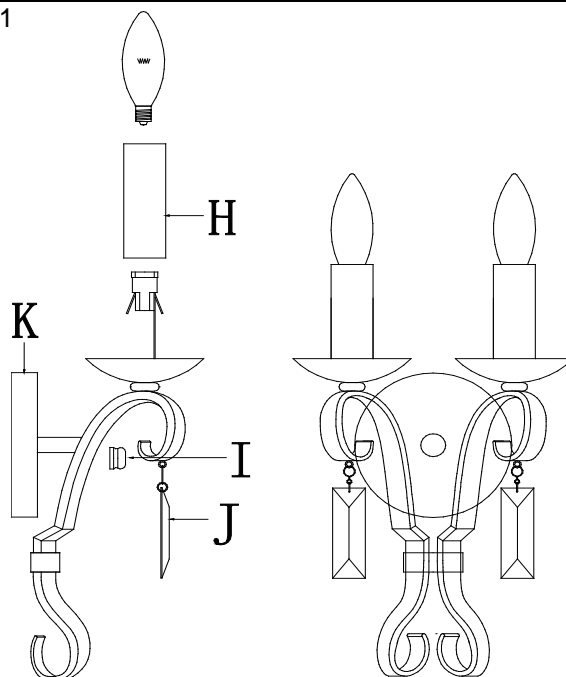

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. Thread other end of the Nipple (C) with Canopy Loop attached into Mounting Strap (D).
4. Take this mounting strap assembly and mount to ceiling junction box with Mounting screws (E). Tighten screw securely with screw driver.

CONNECTING THE WIRES (Fig. 2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
6. Ground wire connection: Connect fixture ground wire to supply ground wire (usually with green insulation) with wire connector. If there is no supply ground wire at ceiling junction box then attach fixture ground wire securely onto green grounding screw located at mounting bar.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

7. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig. 3)

8. Place the fixture Back Plate (K) over the Nipple (C), so it protrudes through the hole in the Back Plate (K)
9. Thread the Deco Nut (I) onto the Nipple (C) and continue turning until the Back Plate (K) is snug against the wall.
10. Install light bulbs in accordance with the fixture's specifications.

YOUR INSTALLATION IS NOW COMPLETE.
RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

JUNCTION BOX (CEILING)

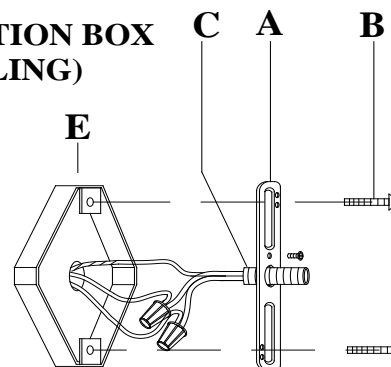


Fig. 2

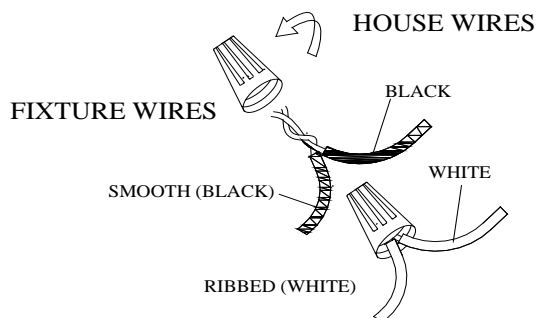


Fig. 3

