


**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

## PARTS LIST


Company Name: \_\_\_\_\_ Co. Account #: \_\_\_\_\_  
to be filled out by retailer

Mounting Strap  
w/ ground screw




1ea 102X76.2X3mm

Wire Connector



2ea P3 Orange

Canopy



1ea 8.75"W x 6"H

Mounting screw



2ea 5/32-32NX28mm

Hex Nut



2 ea 5/32"H3.5mm

Socket Washer



3ea Φ58XΦ42x1.mm

Junction Box  
Screw



2ea 8/32"x1"

Deco Nut



2ea Φ11.6X10.8mm

Wire Lock



2 ea

Part Needed \_\_\_\_\_

Quantity \_\_\_\_\_

Part Needed \_\_\_\_\_

Quantity \_\_\_\_\_

Reason why

( missing, scratched, broken glass, bent, bad finish)

Comments \_\_\_\_\_

## FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. To adjust the height of fixture, pull side cable wires (H) up through wire sleeve (AA) or depress the sleeve into the canopy to release tension on the cable and pull cable down.
2. Secure the cable wire just above canopy with the Wire locks(N) by threading the wire u one hole then down the other , tighten side screws to lock.
3. Thread the wire through center hole in canopy and tie a knot at the desire height.  
\*Test the fixture height and the balance of the side cables befor cutting any wires or cables to length.

\* You may now install the fixture


4. Slide Glass Shade (J) and Socket Washer (K)to Socket (I) and tighten the Socket Ring (L).

5. Install light bulbs in accordance with fixture's specifications.

**NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.**

7158-10 PW/RBZ

Fig. 1

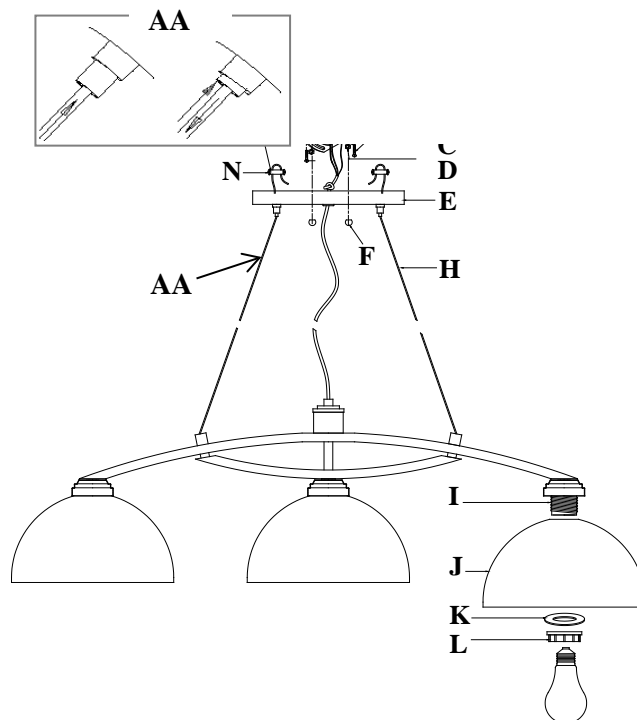

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. The Mounting Strap(B) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your Canopy(E) and Thread two Mounting Screws (A) into the Mounting Strap (B). Secure with Hex nuts (D).
4. Attach Mounting Strap (B) to the Junction Box by using the two Junction Box Screws (C). Tighten the screws securing with screw driver!

### CONNECTING THE WIRES (Fig. 2)

5. Tie the wire cable in a knot above the fixture canopy at the fixture height desired. Leaving approx 8" of wire remaining cut off the excess and strip the ends for connection.
  6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE ( or RIBBED) .
  7. Attach GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the Green Ground Screw on the Mounting Strap (B) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
8. Tuck these wire connections neatly into the ceiling Junction Box.

### FINISHING THE INSTALLATION (Fig. 3)

9. Place the fixture's Canopy (E) over the Mounting Strap (B) and over the Mounting Screws (A), adjust the fixture Canopy (E) and secure the fixture against ceiling by threading the Decorative Nuts (F) until tight.
10. Install the light bulbs and glass shades as per the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE.  
RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE

Fig. 1

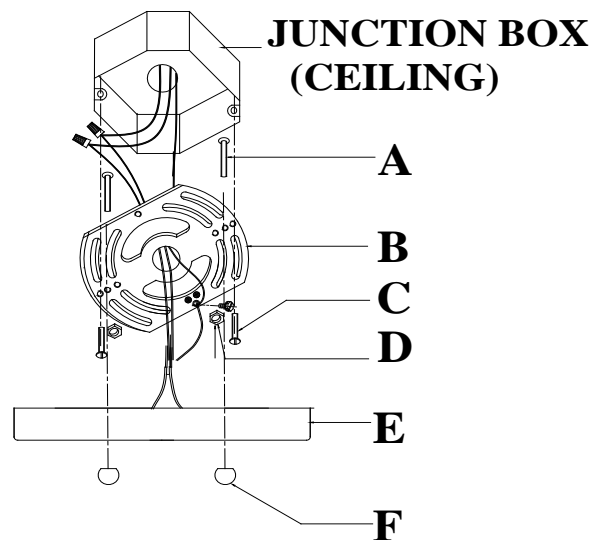


Fig. 2

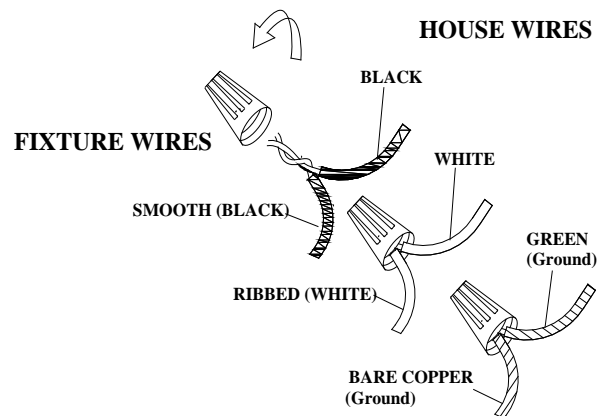


Fig. 3

