



Drawing 1 - Fixture Assembly

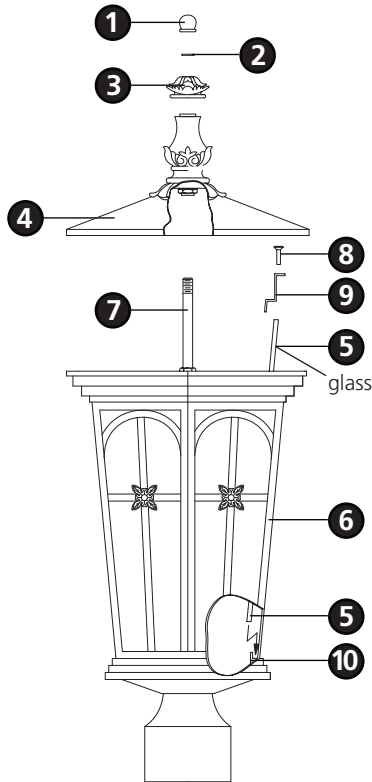

Drawing 2 - Fixture Mounting

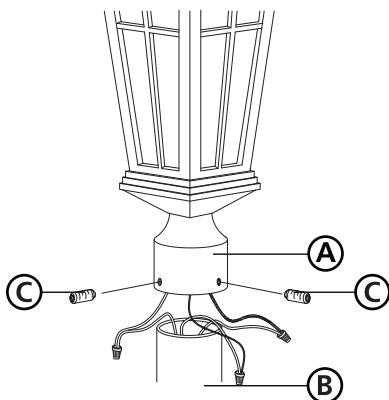

## ▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first installing the glass, making all necessary electrical connections, mounting the fixture to pre-installed post, and then installing the main body of the fixture.**

2

1. To install glass panels, unscrew top knob (1) and remove rubber washer (2) - see **Drawing 1**
2. Slip off top cap (3) and remove roof assembly (4) from nipple (7).
3. Remove screw (8) and glass clip (9) inside cage (6).
4. Slide glass panel (5) into body (6), making sure bottom of glass (5) slips in the slot (10) located at the bottom of the body.
5. Put glass clip (9) back into place and thread in screw (8) to secure glass (5) in place. Repeat for remaining panels of glass.
6. Fixture can now be lamped.
7. Replace roof by following steps 1-2 in reverse order.

3

1. Fixture is mounted using 3 - 1/4-20 set screws.
2. Make all necessary electrical connections following wiring instructions below.

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

4

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

5

1. After wiring connections are complete, slip post fitter (A) over top of pre-installed post (B) making sure all wire connections are tucked inside the pole - see **Drawing 2**.
2. When fixture is slipped over pole make sure no wires are being pinched between the top edge of the pole and the inside of the post fitter.
3. Thread the 3 set screws (C) into pre-tapped holes in post fitter.
4. Tighten with set screws (C) to secure fixture to post.

Note: Maximum wattage for 1217 fixture is 100 watts per bulb.

2.7.08