



Family: Petals | Item No. 4539 AD



Drawing 1 - Glass Installation

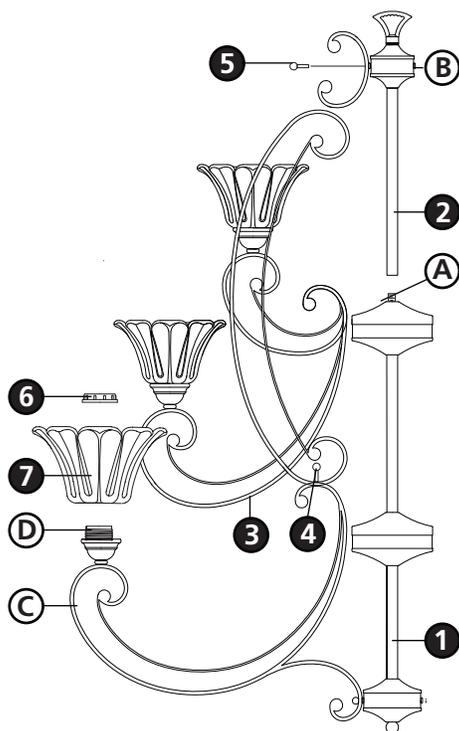

## ▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, installing the mounting hardware, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

2

1. To assemble main body, slip center column (2) along wire and thread onto nipple (A) located on the top of main body (1). Making sure that the holes (B) at the top of the center column line up with the arms (C) of the fixture.
2. Attach scroll (3) to arm (C) by using ball knob (4).
3. Attach top of scroll (3) at point (B) using the ball knob screws (5) provided.
4. Repeat step 2-3 for remaining scrolls (3).
5. Please refer to the hanging instruction sheet (I.S. 19-50) provided to hang fixture. Then refer back to this sheet to install glass.

3

1. To install glass, remove socket ring (6) from socket (D).
2. Slip glass (7) over socket (D) and hold in position.
3. Thread socket ring (6) onto socket (D) to secure glass (7).
4. Repeat steps 1-3 for remaining glass.
5. Fixture can now be lamped accordingly.

Note: Maximum wattage for 4539 fixture is 40 watts per bulb.

2.7.08