


**Drawing 1 - Fixture Assembly**

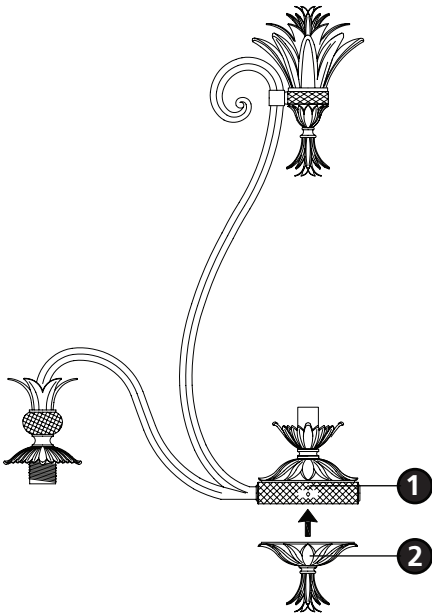

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.


**\*\*\* The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the fixture glass.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**2**

1. Thread bottom finial (2) onto bottom of main body assembly (1) and tighten.
2. Please refer to the hanging instruction sheet (I.S. 19) provided to continue installation of this fixture. then refer back to this sheet to install glass.

**Drawing 2 - Glass Installation**

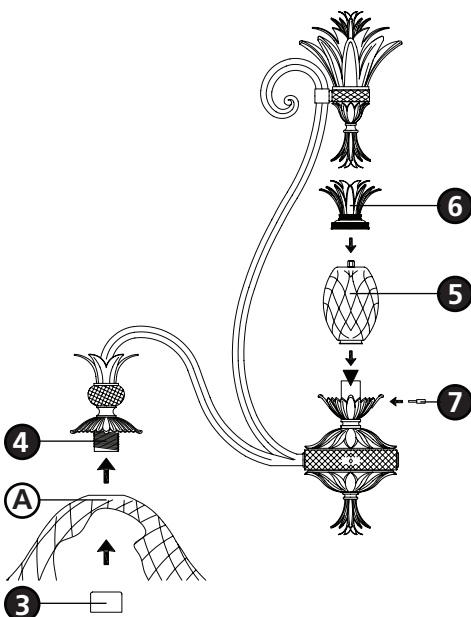

**3**

1. To install glass, remove retaining ring (3) from socket (4).
2. Place glass (A) over exposed section of socket (4) and thread retaining ring (3) onto socket (4) to secure glass (A).
3. To assemble center glass (5), thread crown assembly (6) onto top of glass.
4. Center glass (5) is held in place using 3 screw studs (7) and hand tightening.  
Note: DO NOT use a tool to tighten screw studs (7). Over tightening could damage glass.

Note: Maximum wattage for 4888 fixture's center light is 60 watts per bulb. 2.7.08  
Maximum wattage for 4888 fixture's lower lights are 100 watts per bulb.