

12v & 120v

LED LAMPS

Proven LED performance,
superior savings and a
broad range of options for
landscape lighting systems



KICHLER.

12v & 120v LED LAMPS

Proven LED performance,
superior savings and a
broad range of options for
landscape lighting systems

We've taken everything we know about LED technology and created a new line of lamps that help save money without sacrificing performance.

Designed to fit landscape, outdoor, and security lighting fixtures for both 12v and 120v-277v systems. Kichler® LED lamps offer superior cost savings in terms of energy used and total cost of ownership.

You'll also find an exceptional variety of lamp options so you can create the lighting look you want. And, because they're from Kichler, you are assured that the lamps will perform and last.



MR16 Bi-Pin




PAR20
WET

PROVEN PERFORMANCE

All Kichler LED lamps are designed, tested and listed for use in outdoor environments and are suitable for use in **outdoor wet locations**, and in open or **enclosed** fixtures.

We've **weather coated** and **epoxy potted** the electronics to match the end-use application, assuring **superior durability** for all-weather performance.

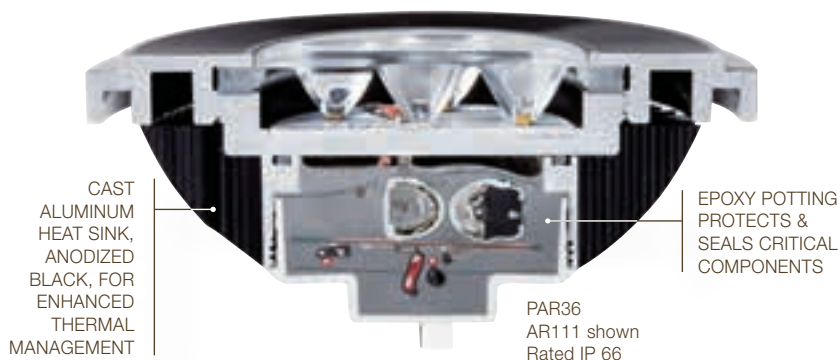

We've given our
lamps a warranty
to match:
**30,000 hours
or 6 years**
even in an enclosed fixture.



All lamps are listed or certified by UL, ETL, and/or CSA to the appropriate ANSI/standard for both the United States and Canada and have been tested for FCC compliance, assuring they won't interfere with other home electronic devices. So, you don't have to worry about inadvertent interference.





S8 Wedge



PAR36
AR111




PAR30
WET
Longneck

SUPERIOR SAVINGS

Kichler® LED lamps can help to **lower the total operating cost** of your existing system, whether you're replacing halogen or other incandescent lamps. You get all of the light needed, while **consuming less wattage**.

6 YEAR Cost Comparison Based on operating cost for 25 fixture installation

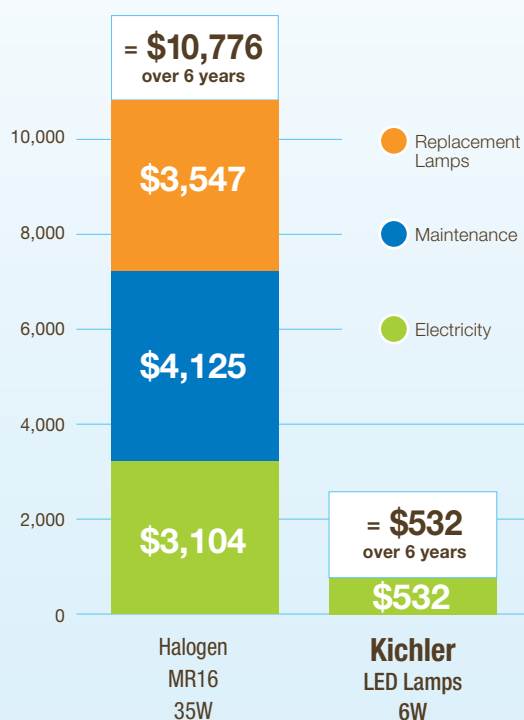

Less Bulb Replacements
+
Less Maintenance

= Longer Service Life*

1 LED
MR16
Bi-Pin



OUTLASTS

13 MR16
Incandescent
Bulbs



* Over 6 years

They not only use less energy, but also last longer than traditional bulbs, meaning **less maintenance** and **no bulbs to replace**. In fact, testing confirms that the lamps will **pay for themselves** in less than two years.


BROAD RANGE OF OPTIONS

When you choose Kichler® LED lamps you don't have to worry about the **voltage, beam spread** or **lamp type** your system requires – because **we've got it all**. With many (light output) **lumen options**, you can get the **exact light output you need**.



Kelvin Temperature Range


Plus, our range of Kelvin **color temperature choices** helps you **customize** the color of the light to **your application**.

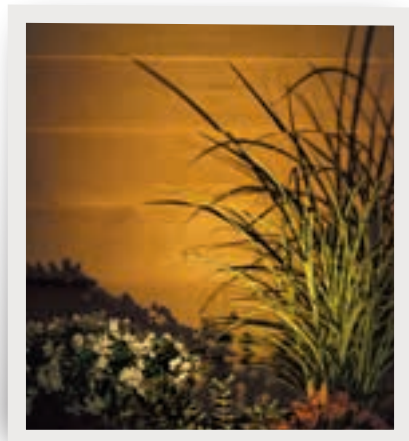

Warm White
2700K




Pure White
3000K

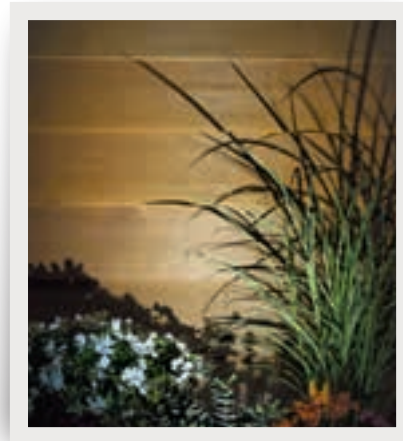

Cool White
4200K

Beam Spread Options

We also offer lamps for a variety of **fixture types** and **beam spread choices** from **narrow spot** to **wide flood**. Beam spread options vary between 12v and 120v lamps.

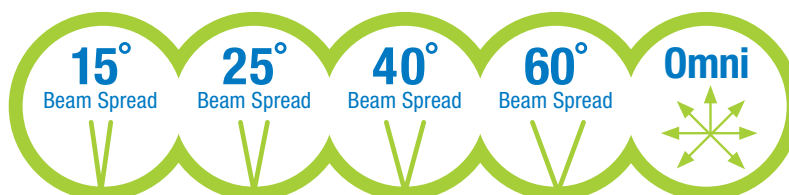




MR16 Bi-Pin



MR16 Bi-Pin



PAR36
AR111



S8 Wedge



T5 Wedge




G4/T3 Bi-Pin

12v FEATURES



- ★ Potted and/or coated electronics protect against moisture
- ★ Generates consistent light output for systems with an operating range from 9V to 15V with no loss in light output because of constant current driver designs
- ★ Designed and listed for outdoor use in enclosed fixtures or wet locations
- ★ Cast aluminum heat sink, anodized black, for increased thermal management
- ★ Integrated, high output Cree® LEDs tightly binned for high CRI, color uniformity and color quality
- ★ 30,000 hour life in an enclosed fixture
- ★ FCC compliance ensures no interference with other electronic devices
- ★ High total lumens and lumens per watt (efficacy)
- ★ Custom optics deliver center-to-edge beam uniformity



PAR20
STANDARD



PAR30
STANDARD



PAR30
STANDARD
LONGNECK



PAR38
STANDARD



PAR20
WET LOCATION



PAR30
WET LOCATION



PAR30
WET LOCATION
LONGNECK




PAR38
WET LOCATION


120v FEATURES



- ★ Potted and/or coated electronics protect against moisture
- ★ Operating range from 120V to 277V
- ★ Standard versions designed and listed for use in an enclosed fixture
- ★ Wet location versions designed and listed for use in an enclosed or open fixture
- ★ Cast aluminum heat sink, anodized black, for increased thermal management
- ★ Integrated driver and transformer with high output Cree® LEDs tightly binned for high CRI, color uniformity and color quality
- ★ 30,000 hour life in an enclosed fixture
- ★ FCC compliance ensures no interference with other electronic devices
- ★ High total lumens and lumens per watt (efficacy)
- ★ Custom optics deliver center-to-edge beam uniformity



12V LED LAMPS



Base / Lamp Type	Watts / Lumens	Kelvin Temperature		Beam Angle		
MR16 Bi-Pin Medium Power 	4W, 5.2VA* 240-280Lm Compares up to 20-25W Halogen		15° Spot	25° Wide Spot	40° Flood	60° Wide Flood
		2700K - Warm White	18000	18003	18006	18009
		3000K - Pure White	18001	18004	18007	18010
		4200K - Cool White	18002	18005	18008	18011
MR16 Bi-Pin High Power 	6W, 9VA* 380-440Lm Compares up to 35-40W Halogen		22° Spot	38° Flood	60° Wide Flood	
		2700K - Warm White	18012	18015	18018	
		3000K - Pure White	18013	18016	18019	
		4200K - Cool White	18014	18017	18020	
PAR36/AR111 Wet Location 	11W, 14.9VA* 540-660Lm Compares up to 50W Halogen		15° Spot	25° Wide Spot	40° Flood	
		2700K - Warm White	18021	18024	18027	
		3000K - Pure White	18022	18025	18028	
		4200K - Cool White	18023	18026	18029	
S8 Wedge 	2W, 2.8VA* 85-110Lm Compares up to 18.5W Krypton		300° Omni-directional			
		2700K - Warm White	18036			
		3000K - Pure White	18037			
		4200K - Cool White	18038			
T5 Wedge 	2W, 2.8VA* 85-110Lm Compares up to 16W Xenon		300° Omni-directional			
		2700K - Warm White	18039			
		3000K - Pure White	18040			
		4200K - Cool White	18041			
G4/T3 Bi-Pin 	2W, 2.8VA* 85-110Lm Compares up to 20W Halogen		300° Omni-directional			
		2700K - Warm White	18042			
		3000K - Pure White	18043			
		4200K - Cool White	18044			


* Multiply fixture VA by the number of fixtures used to determine size of transformer.

Stated lumens are for bare lamp only. Using lamp in enclosed fixtures can result in up to 40-50% loss in lumen output based on test data.

All lamps are listed or certified by UL, ETL, and/or CSA to the appropriate ANSI/standard for both the United States and Canada and have tested for FCC compliance, assuring they won't interfere with other home electronic devices. So, you don't have to worry about inadvertent interference.



120V-277V LED LAMPS









Base / Lamp Type	Watts/Lumens	Kelvin Temperature					Beam Angle		
PAR20 - Standard** 	7W 330-400Lm Compares up to 35W Halogen		15° Spot	25° Wide Spot	40° Flood	60° Wide Flood			
		2700K - Warm White	18045	18048	18051	18054			
		3000K - Pure White	18046	18049	18052	18055			
		4200K - Cool White	18047	18050	18053	18056			
PAR30 - Standard** 	12W 650-750Lm Compares up to 50W Halogen		15° Spot	25° Wide Spot	40° Flood	60° Wide Flood			
		2700K - Warm White	18057	18060	18063	18066			
		3000K - Pure White	18058	18061	18064	18067			
		4200K - Cool White	18059	18062	18065	18068			
PAR30 - Standard** Longneck 	12W 650-750Lm Compares up to 50W Halogen		15° Spot	25° Wide Spot	40° Flood	60° Wide Flood			
		2700K - Warm White	18099	18102	18105	18108			
		3000K - Pure White	18100	18103	18106	18109			
		4200K - Cool White	18101	18104	18107	18110			
PAR38 - Standard** 	17W 800-900Lm Compares up to 75W Halogen		15° Spot	25° Wide Spot	40° Flood	60° Wide Flood			
		2700K - Warm White	18069	18072	18075	18078			
		3000K - Pure White	18070	18073	18076	18079			
		4200K - Cool White	18071	18074	18077	18080			
PAR20 - Wet*** Location 	7W 310-350Lm Compares up to 35W Halogen		25° Wide Spot		40° Flood				
		2700K - Warm White	18081		18084				
		3000K - Pure White	18082		18085				
		4200K - Cool White	18083		18086				
PAR30 - Wet*** Location 	12W 580-640Lm Compares up to 50W Halogen		25° Wide Spot		40° Flood				
		2700K - Warm White	18087		18090				
		3000K - Pure White	18088		18091				
		4200K - Cool White	18089		18092				
PAR30 - Wet*** Location Longneck 	12W 580-640Lm Compares up to 50W Halogen		25° Wide Spot		40° Flood				
		2700K - Warm White	18111		18114				
		3000K - Pure White	18112		18115				
		4200K - Cool White	18113		18116				
PAR38 - Wet*** Location 	17W 800-900Lm Compares up to 75W Halogen		25° Wide Spot		40° Flood				
		2700K - Warm White	18093		18096				
		3000K - Pure White	18094		18097				
		4200K - Cool White	18095		18098				

** Standard versions designed and listed for use in an enclosed fixture.







***Wet location versions designed and listed for use in an enclosed or open fixture.

Stated lumens are for bare lamp only. Using lamp in enclosed fixtures can result in up to 40-50% loss in lumen output based on test data.

12v PHOTOMETRICS

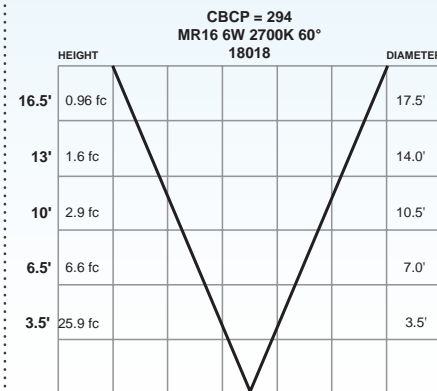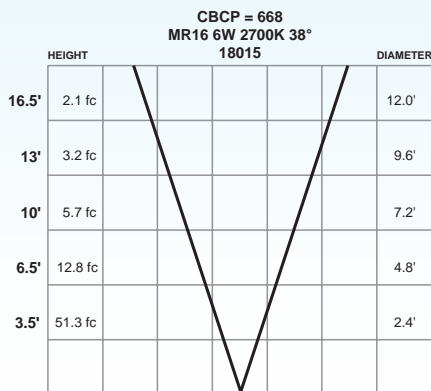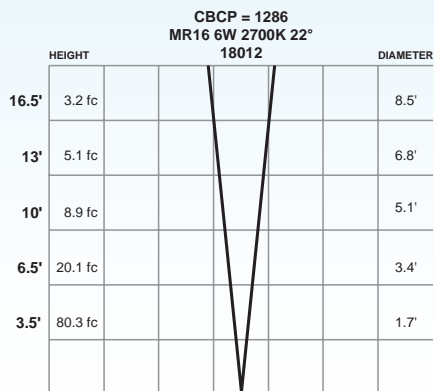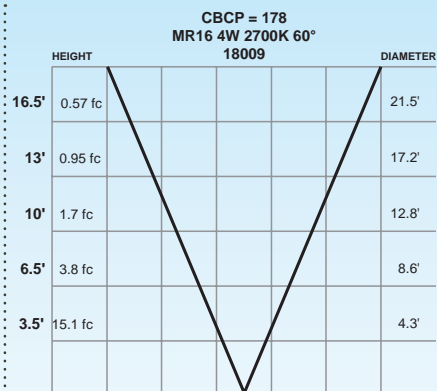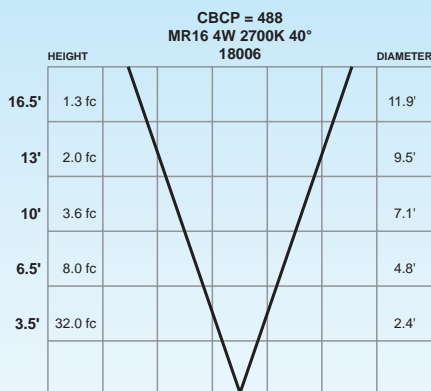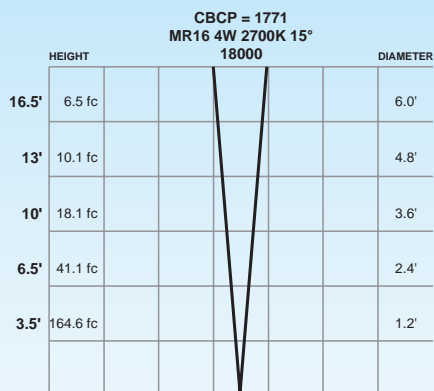

120v-277v PHOTOMETRICS

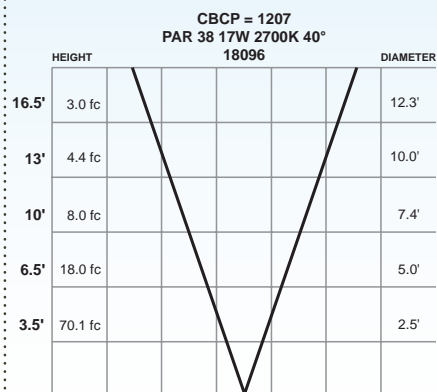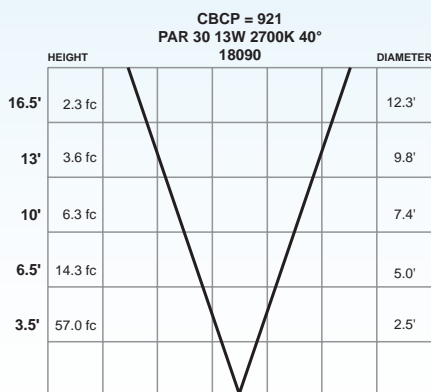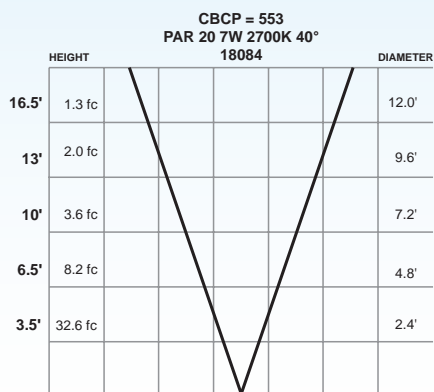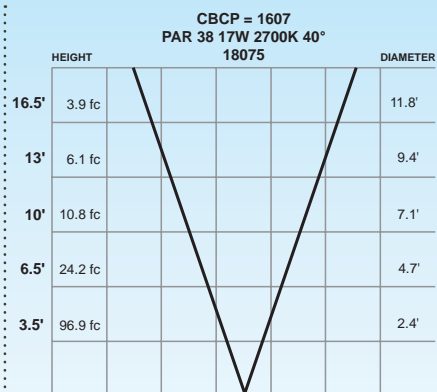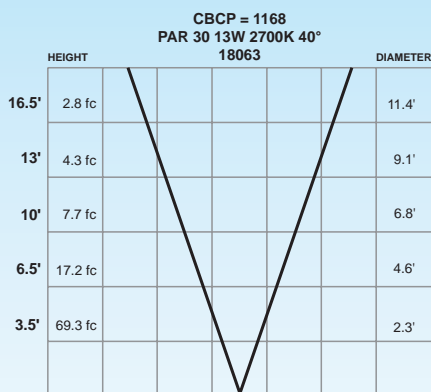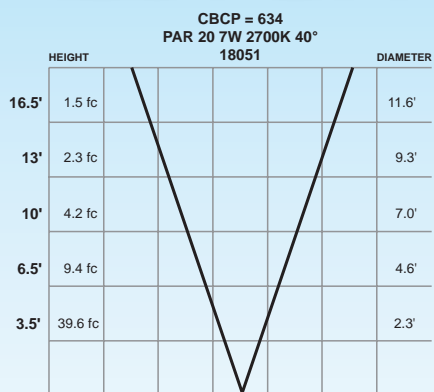

* The curves indicate the illuminated area and the average illumination when the luminaire is at different distances. Stated footcandles are for bare lamps only. For additional photometrics, visit landscapelighting.com