



Family: Coventry | Item No. 1821 RB

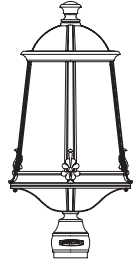

**Drawing 1 - Fixture Assembly**

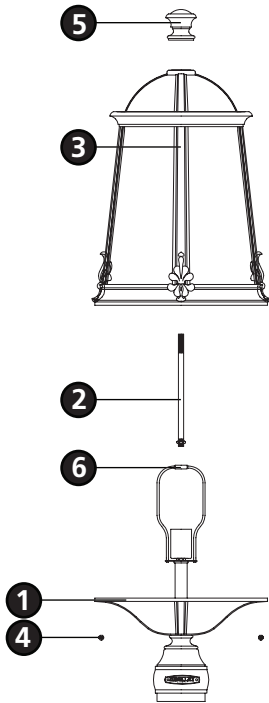

▼ start here

**1**


1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**2**

**\*\*\* The construction of this fixture will be accomplished by first assembling main body, making all necessary electrical connections, and then mounting the fixture to pre-installed post.**

1. To assemble fixture, thread center stem (2) onto harp (6) of main socket assembly (1) - see **Drawing 1**.
2. Fixture can now be lamped accordingly.
3. Slip cage assembly (3) onto center stem (2) and slide down until bottom of cage assembly rests on ring of main socket assembly (1).
4. Line up holes in bottom of cage assembly (3) with holes in ring of main socket assembly (1).
5. Slip screws (4) through holes in ring of main socket assembly (1) and thread them into the holes of the cage assembly (3) and tighten.
6. Thread decorative knob (5) onto top of center stem (2).

**Drawing 2 - Fixture Mounting**

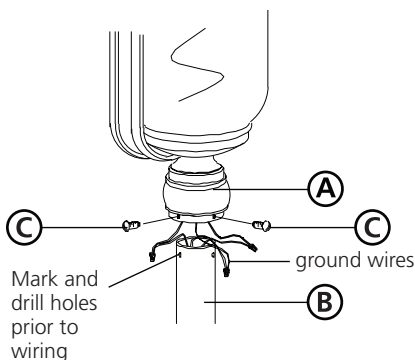

**3**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

3. Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

**4**

1. Slip post fitter (A) over top of pre-installed post (B) - see **Drawing 2**.
2. Using the holes in the side of the post fitter as guides, drill three 1/16" diameter holes in the pole.
3. Now screw in the three sheet metal screws (C) to secure fixture.

Note: Maximum wattage for 1821 fixture is 100 watts per bulb.

4.1.08