



## Florescent Fitter™

A Kichler® Ceiling Fan Accessory  
Designed to coordinate with a popular Kichler ceiling fan

**KICHLER**  
LIGHTING 

Kichler Lighting  
7711 East Pleasant Valley Road  
P.O. Box 310010  
Cleveland, Ohio 44131-8010

Customer Service  
866.558.5706  
8:30 AM to 5:00 PM EST,  
Monday - Friday

Instruction Manual

**KICHLER**  
LIGHTING 


**"CAUTION-RISK OF FIRE"**  
**CONSULT A QUALIFIED ELECTRICIAN TO**  
**ENSURE CORRECT BRANCH CIRCUIT**  
**CONDUCTOR.**

## 1. SAFETY RULES

### **WARNING! RISK OF ELECTRIC SHOCK**

All electrical connections must be made in accordance with local codes, ordinances, or national codes. If you are unfamiliar with installing electrical wiring, secure the services of a qualified electrician. Before starting this installation, disconnect the power by turning off the circuit breaker at your main panel or removing the fuse at the fuse block. Turning the power off using the ceiling fan switch (speed control on/off) is not sufficient to prevent electrical shock.

**NOTE:** The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors which cannot be built into any product. These factors must be supplied by the person (s) caring for and operating the unit.

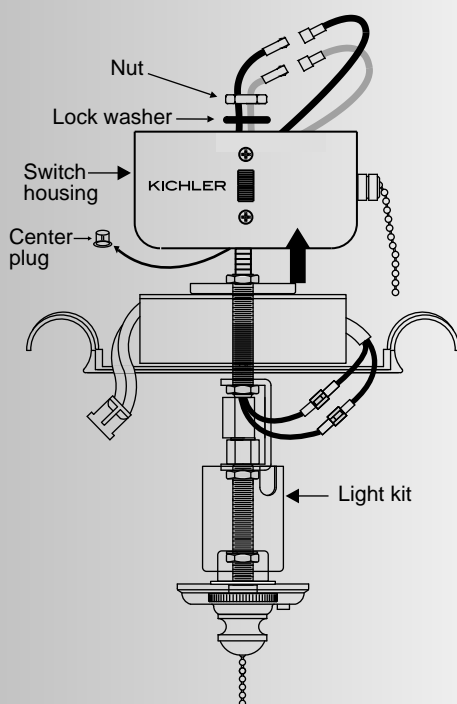


**Fig. 1**

## 2. INSTALLING THE LIGHT KIT

1. Remove and discard the center plug from the switch housing. Attach the light kit to the switch housing by feeding the light kit wires (black and white) through the hole of switch housing and then screw it onto the switch housing by nut & lock washer. Be sure it is tight enough to prevent light kit from vibrating loose. (Fig. 1)
2. Locate two single white and blue wires in the switch housing labeled FOR LIGHT.
3. Make the polarized plug connections:
  - White to white
  - Blue to black

4. Raise and hold the light kit assembly close to the mounting plate. snap together the wire connection plugs. (Fig. 2)

5. Carefully push all wires back into the switch housing, then install the light kit assembly onto the mounting plate with 3 screws provided. (Fig. 2)

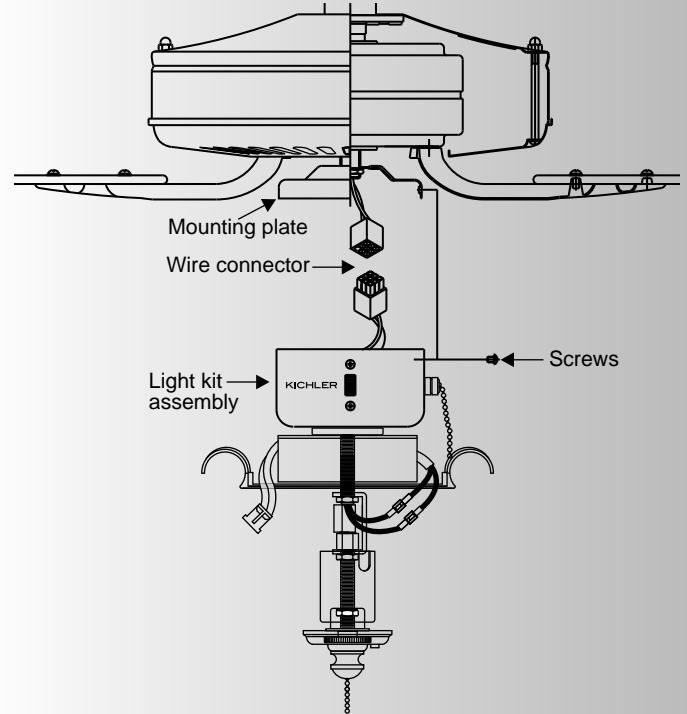

**Fig. 2**


## 3. INSTALLING THE LIGHT BULB & GLASS SHADES

1. Connect the wire connector from the fan to the lamp, then install the lamp (22W) to the light kit using the 3 lamp holders to prop up the lamp. Be sure to pull the lamp holders out a little for installing the lamp easier. (Fig. 3)

2. Remove the decorative nut, glass cap and metal nut from the light kit. Place glass shade over the light kit stem, secure with the metal nut (rubber side on the top), glass cap and decorative nut. Do not overtighten. (Fig. 3)

3. Insert the 2 pull chain through the eyelet in the shade and cap. (Fig. 3)

4. Restore power only after installation is completed.

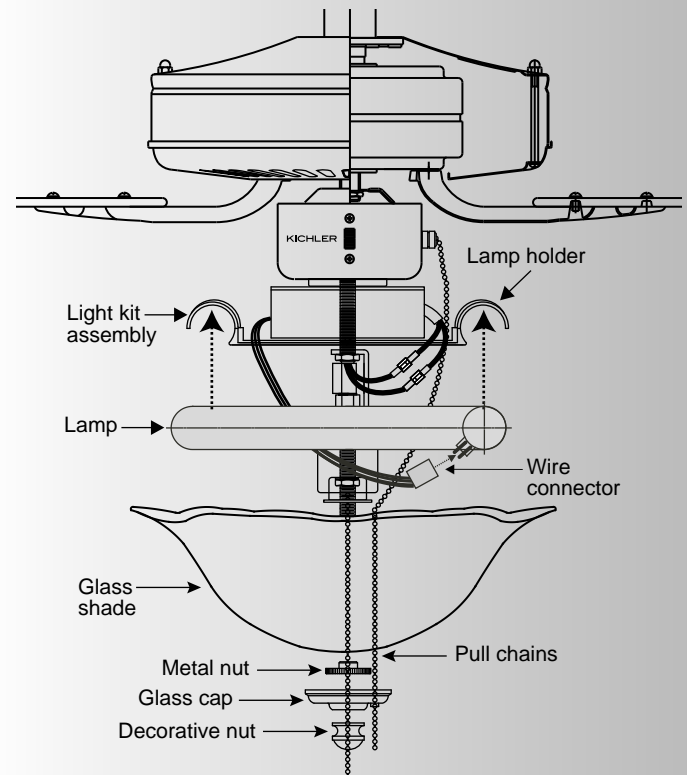

**Fig. 3**