


















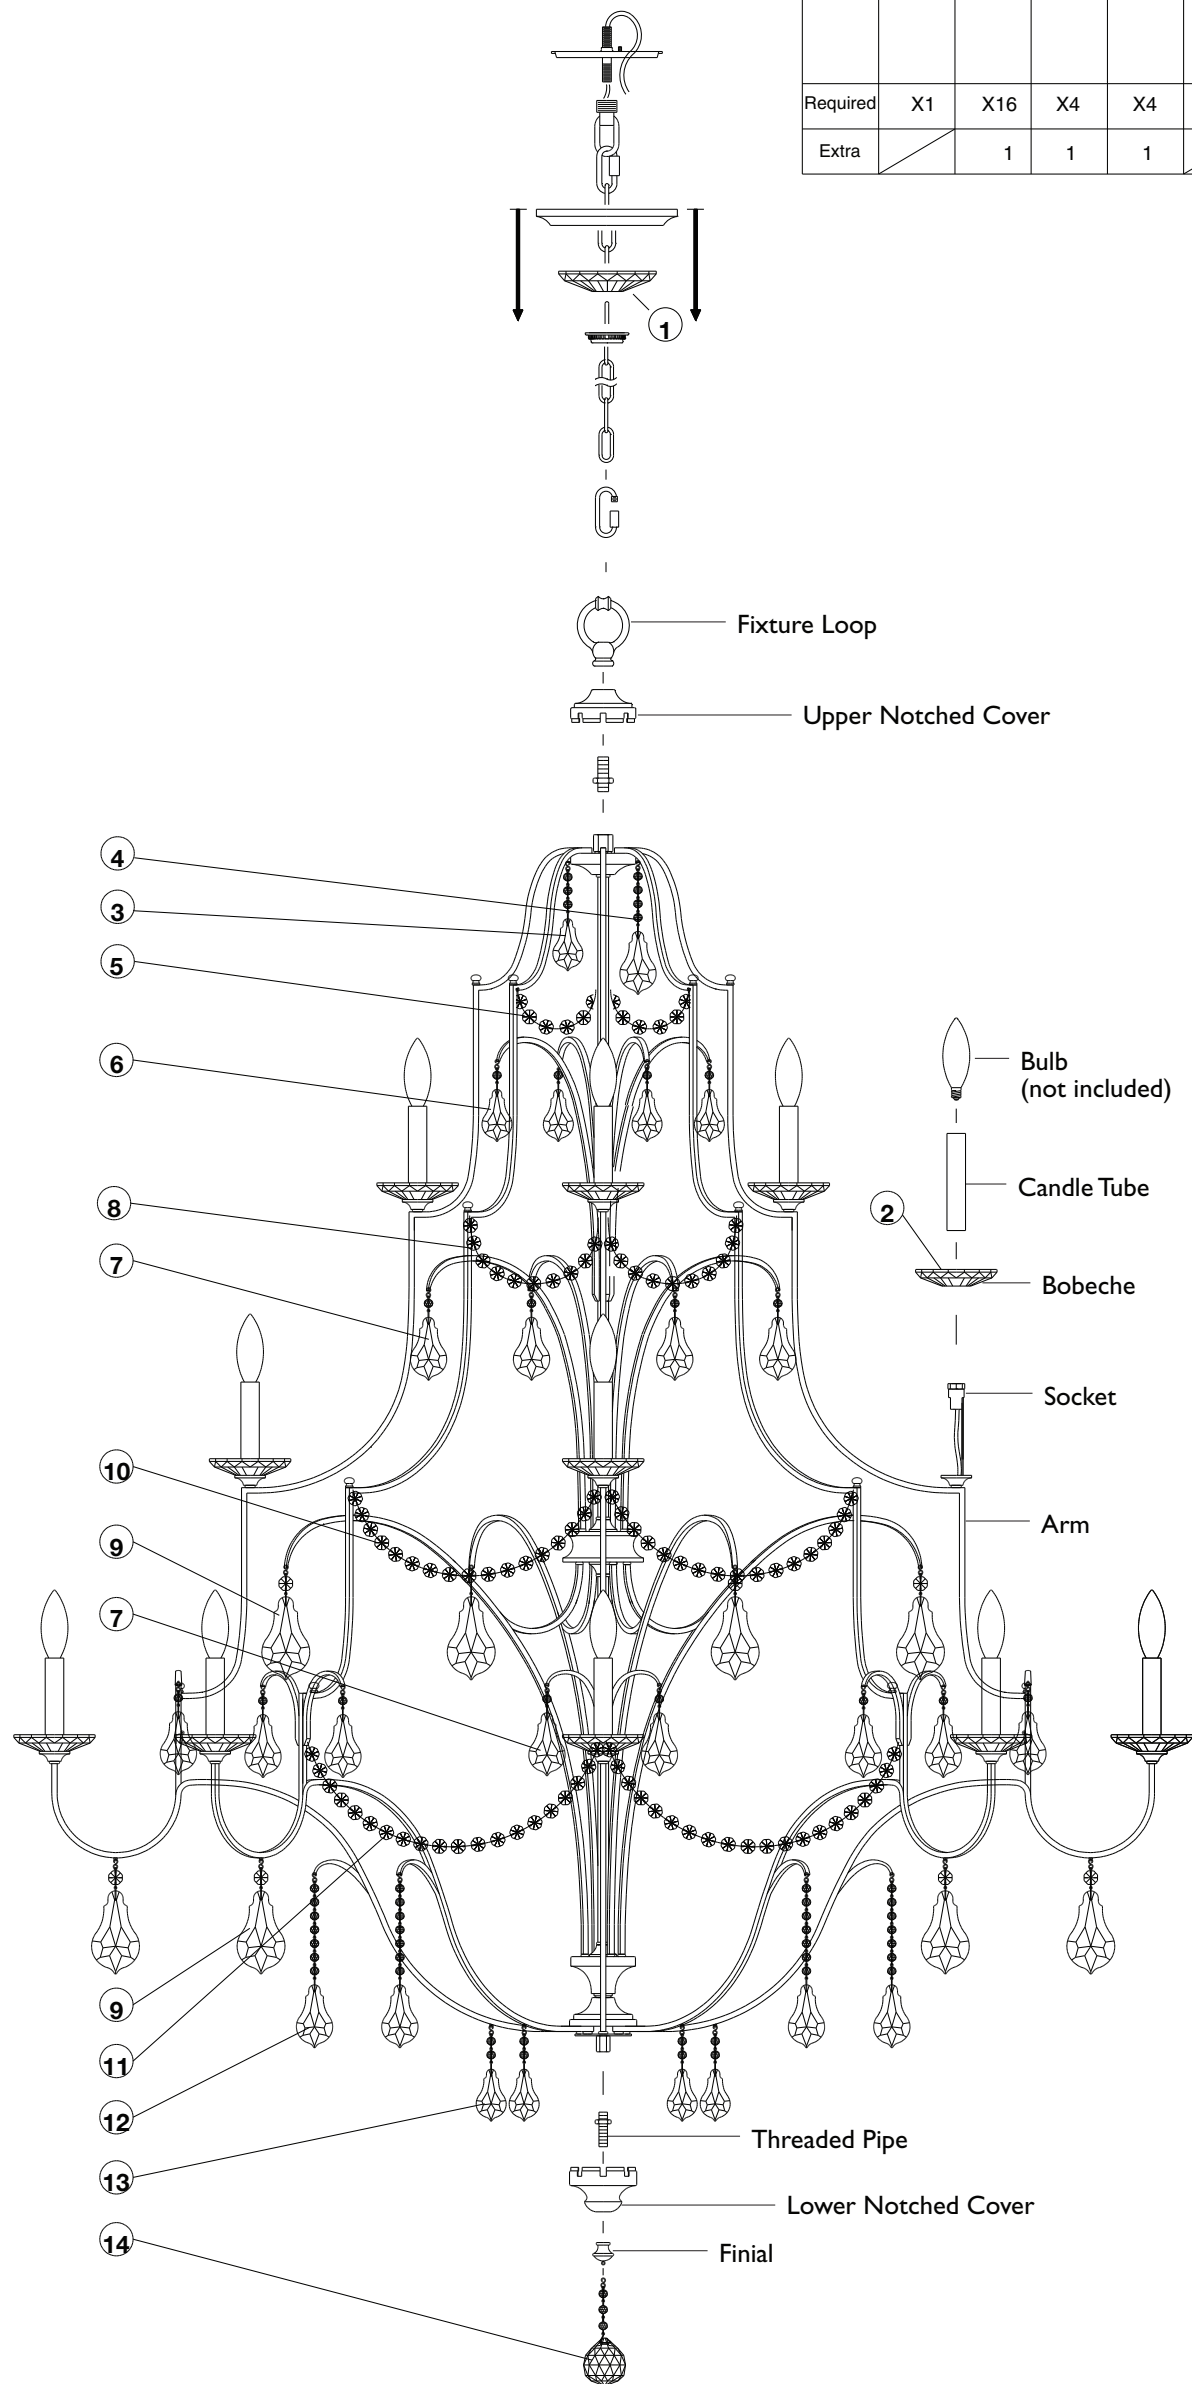
Assembly Instructions For

F2622/8+4+4

(E) 5/10

Extra PIN Qty.	PIN PART	PIN DESCRIPTION
10		S Hook
10		Bowtie pin
6		Head Pin


	1	2	3	4	5	6	7	8	9	10	11	12	13	14
														
Required	X1	X16	X4	X4	X8	X4	X20	X8	X12	X8	X8	X8	X8	X1
Extra		1	1	1		1	2		1	1	1	1	1	1



IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE
OR CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

- Turn arms so they are equally spaced apart from each other.
- Install threaded pipe by screwing onto top of fixture.
 - Slip upper notched cover and fixture loop through fixture wires.
 - Install the upper notched cover on top of fixture, making certain arms are locked onto its notches, by fastening with fixture loop.
- Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
IMPORTANT: WHEN FOLLOWING SUPPLEMENT INSTRUCTIONS STEP #6, MAKE CERTAIN TO SLIDE CRYSTAL BOBECHE (IN BETWEEN COLLAR RING AND CANOPY) DOWN THE CHAIN. See illustration.
- Install a hex nut onto one end of threaded pipe leaving about 3/8" (10mm) of thread exposed. Then install same end of pipe by screwing onto bottom of fixture. Tighten hex nut.
 - Slip lower notched cover through the installed threaded pipe and secure by fastening with finial. Make certain arms are locked onto its notches before tightening finial.
- Install crystal bobèche by slipping through sockets.
 - Install candle tube by slipping through sockets.
 - Install type-B, candelabra base, of 60 Watt maximum bulbs (not included).
- Hang all crystal glass parts as shown on drawing.
NOTE: To replace broken crystal or pin, extras are included in hardware bag. Replace by gently bending open pin, remove broken crystal or pin, hook new one, then close back pin. Avoid bending pin into sharp angle.



MURRAY
F E I S S

GENERATION
BRANDS