

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 8802-65

For Wall Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

MOUNTING THE FIXTURE

Installation (see fig.1)

1. Disconnect power at main electrical panel before installation.
2. Attach the crossbar to the junction box using two junction box screws. The side of the crossbar marked "GND" must face out.
3. Follow wiring instructions carefully (see fig.2)
4. Place the fixture body(G) over the crossbar, thread the two fixture screws to the crossbar, through the hole in the fixture back plate of the fixture body(G), then lock the fixture screws securely.
5. Place the socket sleeve (E) and the harp(C) over the socket of the fixture body(G), then lock it securely with the check ring (D). Install the light bulb and put the glass shade(B) on to the harp(C), then screw the finial(A) onto shade(B).
6. Attach the finial(H) to the fixture body(G).
7. Attach the crystal(F) to the small ring of the finial(H) and the leaf of the fixture body(G).
8. Install the light bulbs in accordance with the fixture's **specifications**. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the crossbar.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1

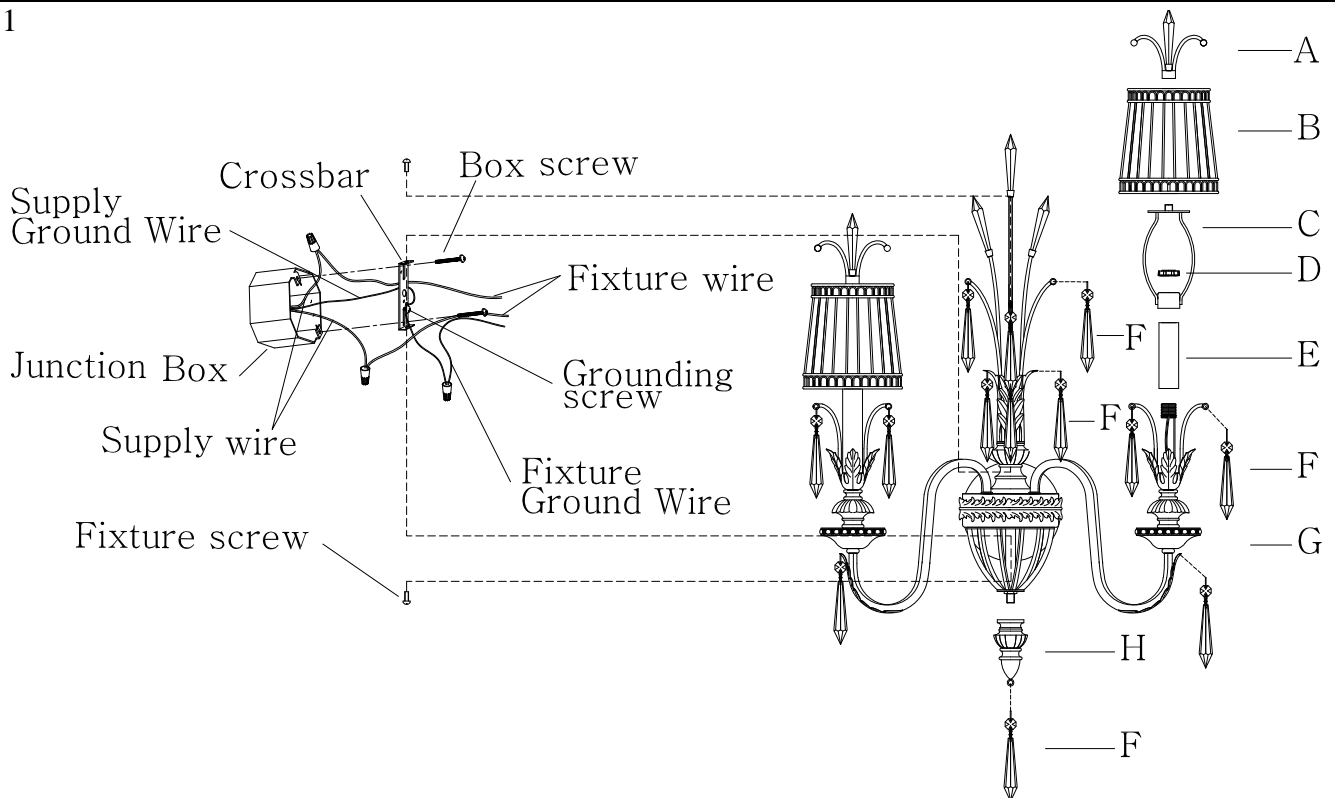


Fig.2

FIXTURE WIRES	HOUSE WIRES	FIXTURE WIRES	HOUSE WIRES	FIXTURE WIRES	HOUSE WIRES
Black or Smooth	Black (Hot)	White or Ribbed	White (Neutral)	Bare Copper (Ground)	Green or Bare Copper (Ground)

LIVEX®
LIGHTING