





RONDELLE 1250- _ _ _ _

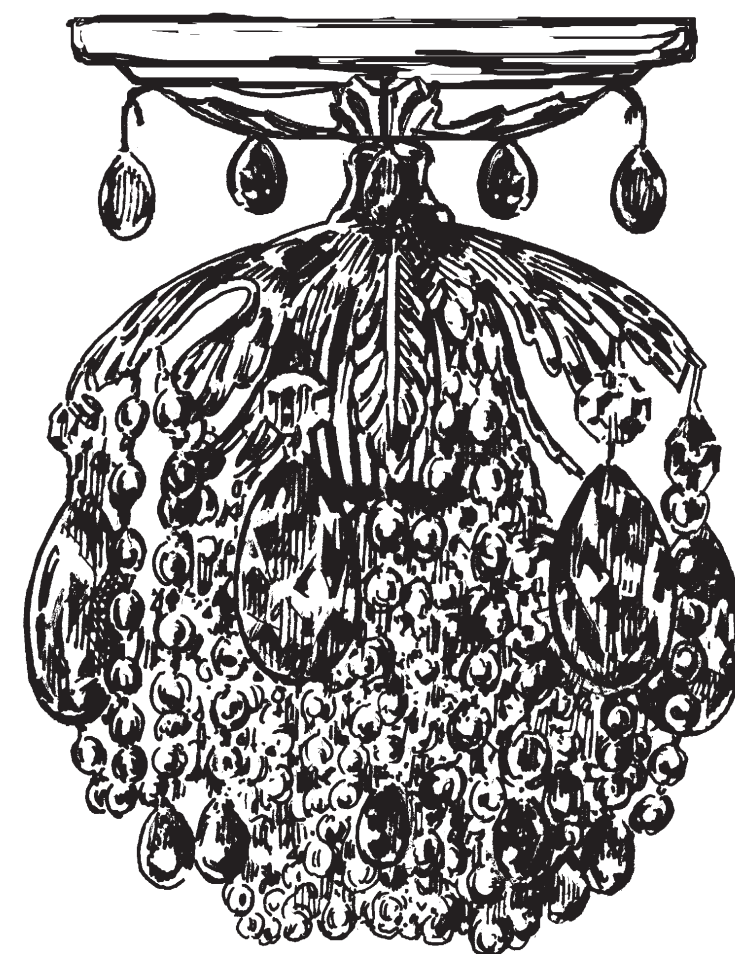


THIS DESIGN IS THE PROPRIETARY
TRADE DRESS/TRADE MARK OF
SWAROVSKI LIGHTING, LTD.

1 Light
Diameter: 5-1/2"
Body Length: 7-1/2"
Hanging Weight: 2 lbs.

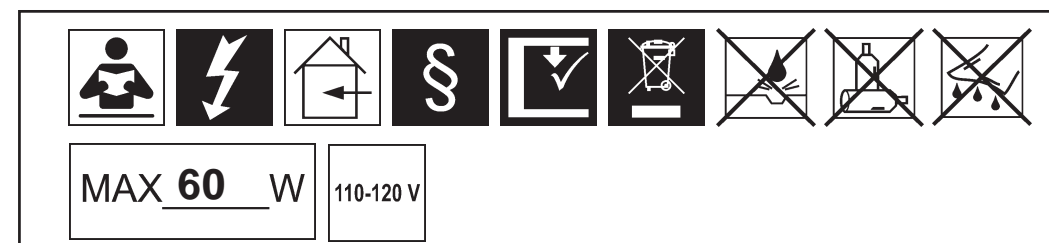




SCHONBEK® is a member of the Swarovski group.


All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

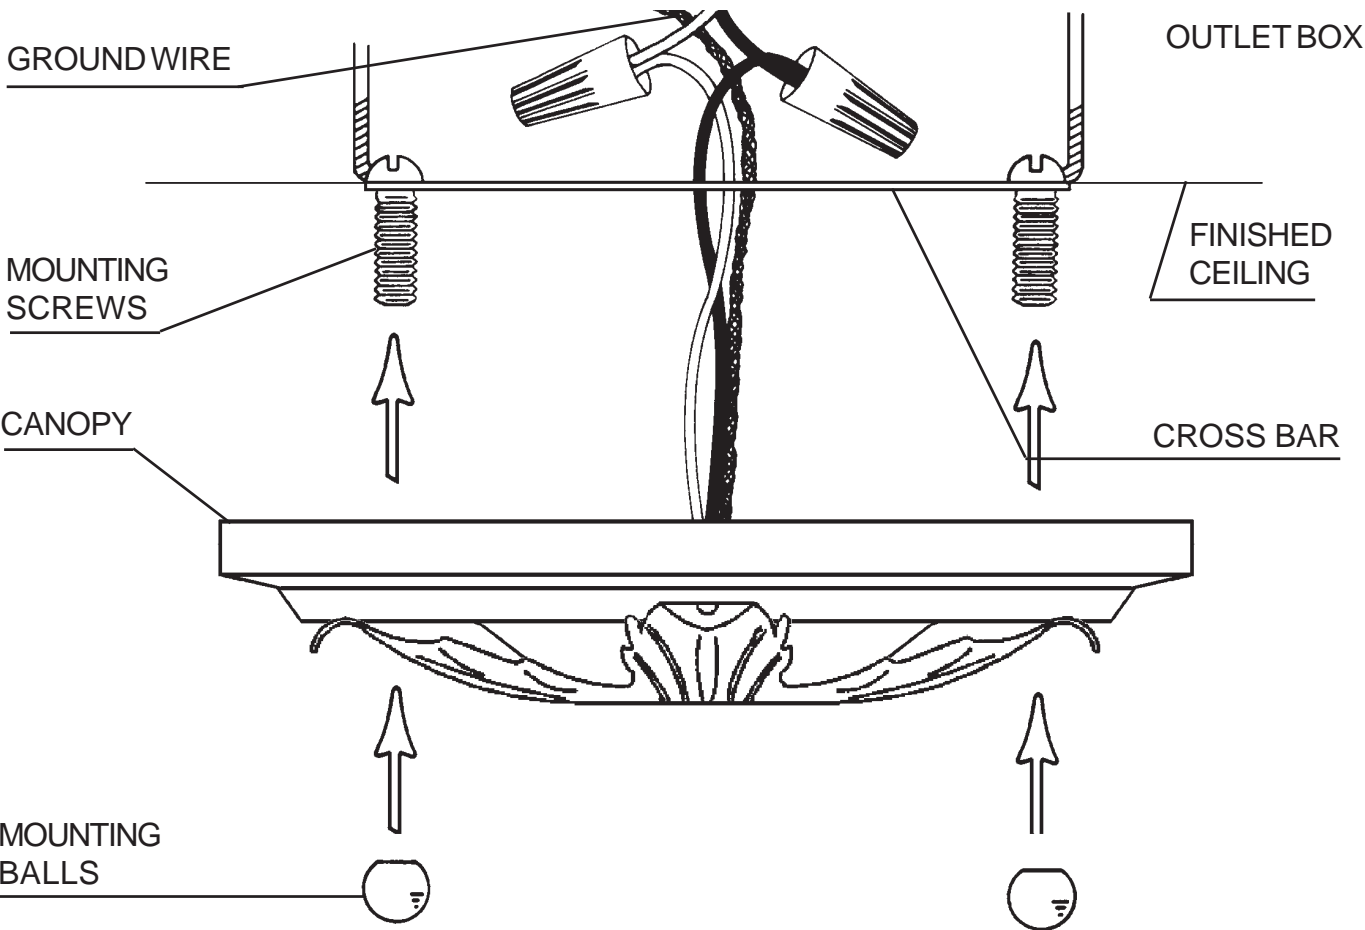

- 1** Attach cross bar to outlet box.
- 2** Again, make sure that power to the outlet box is disconnected. Feed stem wires through cross bar and attach to power wires in outlet box. Fixture **MUST** be properly grounded.
- 3** Attach canopy to ceiling with mounting balls, thereby retaining complete fixture against ceiling.
- 4** Screw bulb into socket. Test power to insure proper wiring before hanging trim from fixture.





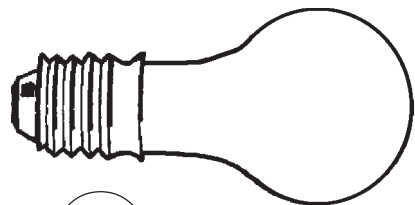

5

You will need 1 - Type A
25 Watts Recommended
60 Watts Max
MIN 90°C SUPPLY
CONDUCTORS

Install bulbs and be sure
to test fixture **BEFORE**
trimming.


NOTE:

Alternate hanging
Letters "E1" and "F" from
every other top leaf!

NOTE:

When installing Chains "D" hook one
end of the chain into the hole of the
bottom leaf, skip one leaf and hook the
other end of the chain into the next
bottom leaf. Repeat for all leaves.

See illustration below.

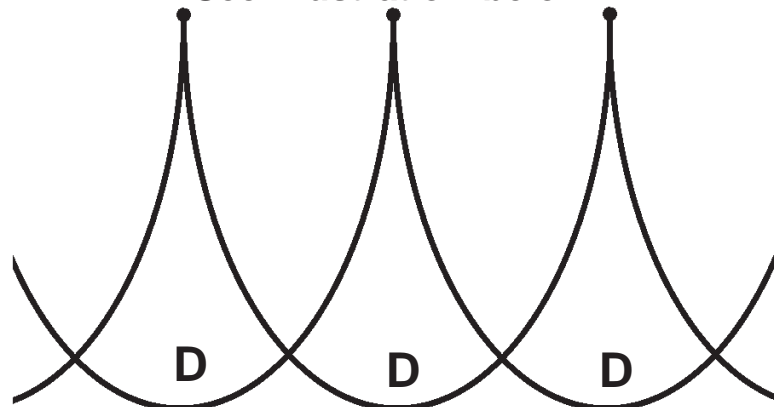

NOTE:
When trimming
Soft Jewel Tones™ "SJ",
for best appearance,
alternate hanging trim so
that similar colors are
NOT next to each other.

NOTE:

When trimming a
"AM", "AT", "OL",
"SM" or "TO"
alternate hanging
"A&A1".

NOTE:

When trimming a "AM",
"AT", "OL", "SM" or "TO"
alternate hanging "C&C1".

