

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two Studs (A) about 1/4" into the pre-drilled holes in the Crossbar spaced the same distance apart as the holes in the canopy (B).
4. Attach the Crossbar to the Junction Box with the two Junction Box Screws as shown. The side of the Crossbar marked "GND" must face out.
5. While holding the column assembly towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Crossbar with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
6. Attach the tube (E) to top of the fixture body (M) and lock it with the loop (D) until tight.
7. Attach the finial base (O) to the bottom of the fixture body (M) and lock it with the finial (P).
8. Hook the end of chain (F) to the hook on the top column and the loop on the iron frame.
9. Place the socket sleeve (L) and the harp (J) over the socket of the fixture body (M), then lock it securely with the check ring (K). Install the light bulb and put the glass shade (I) on to the harp (J), then screw the finial (H) onto the glass shade (I). **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**
10. Adsorb the magnet of crystal (G) to the center of the finial (H).
11. Then cover the junction box with the canopy (B), aligning the screw of mounting plate with the hole of canopy and lock it with brass ball (C).
12. Attach the crystal (N) to the fixture body (B), the fixture body (M) and the finial (P).

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

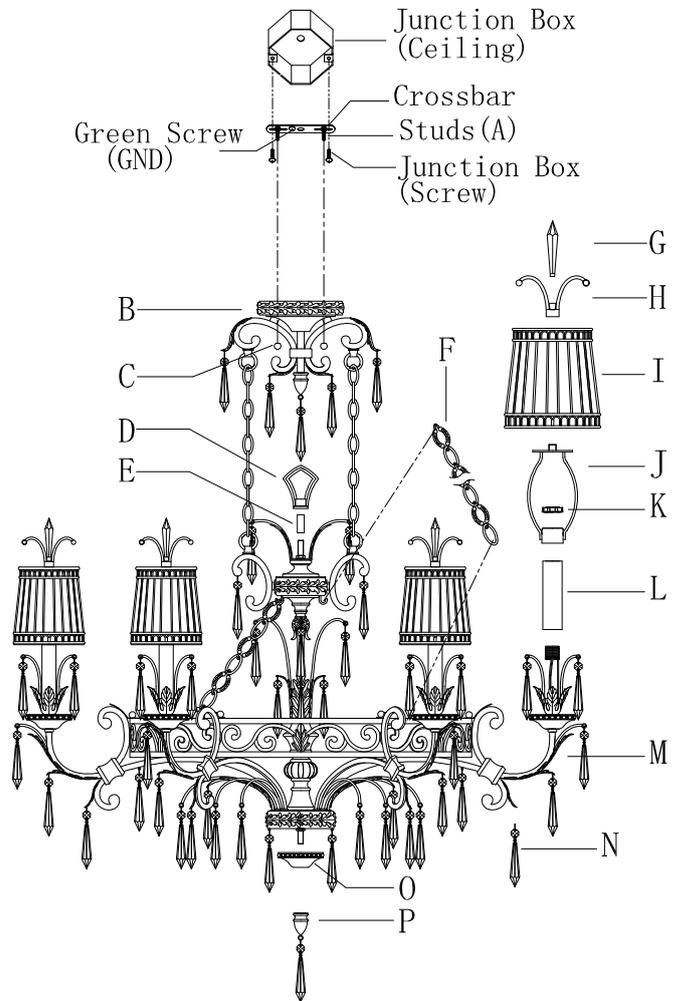


Fig.2

