



Instructions for electrician STEPS 2 - 5

WARNING:

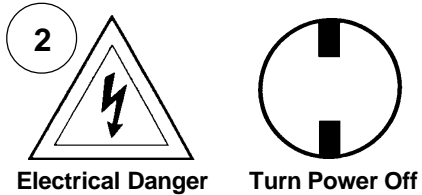


All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

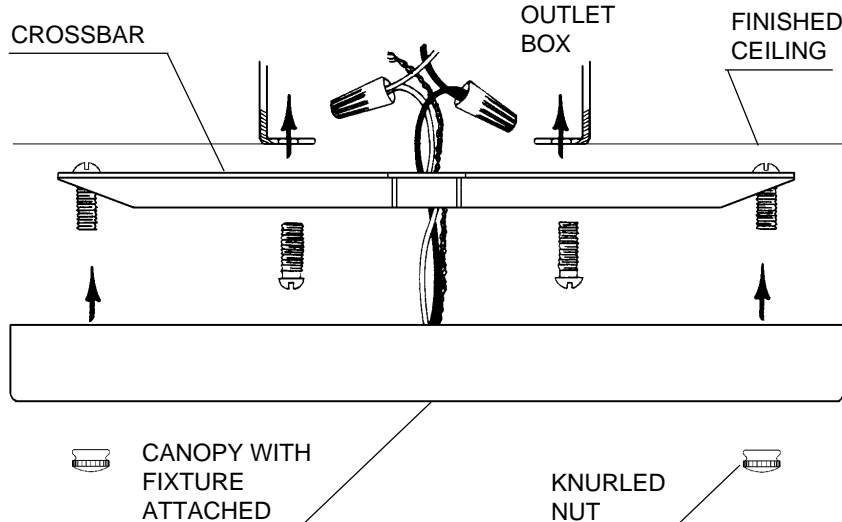

- 3** Feed stem wires through crossbar and attach to power wires in outlet box. Fixture **MUST** be properly grounded.
- 4** Attach cross bar to outlet box.
- 5** Check distance from ceiling to assure assembly will be flush against ceiling. Attach canopy to ceiling with (4) knurled nuts, thereby retaining complete fixture against ceiling.

CHANDELIER 2620-____ TRIM DIAGRAM (Finish Option)

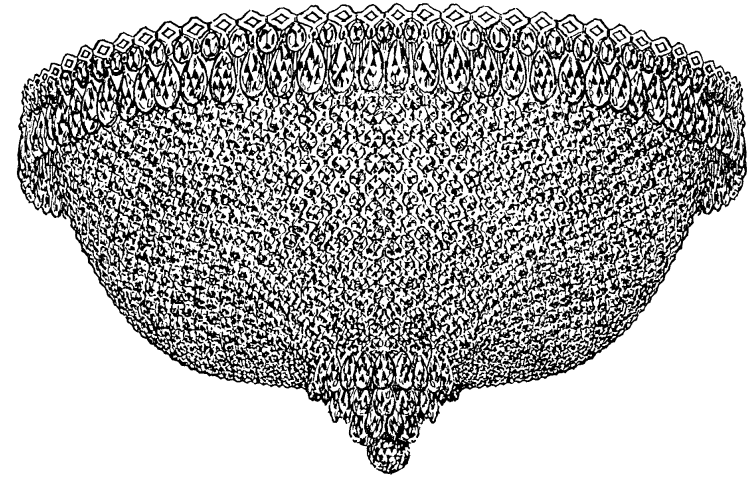

THIS DESIGN IS THE PROPRIETARY
TRADE DRESS/TRADEMARK OF
SCHONBEK WORLDWIDE LIGHTING INC.

21 Lights
Diameter: 28"
Body Length: 15-1/2"
Hanging Weight: 32 lbs.

SCHONBEK®

**See diagram on back page
Follow steps in exact order
Save this trim diagram for future reference**

1

IMPORTANT

Person who opens carton should record the following information for future service.

CODE # _____ Four-digit number on outside of carton.
PACKER # _____ See crystal package label.
ORDER # _____ See crystal package label.

SCHONBEK IS A WORLD LEADER IN CHANDELIER DESIGN. PATENTS INCLUDE:
#D5,222,805

Instructions for crystal trimming STEPS 6 - 16



6

You will need 21 - C10
25 Watts Recommended
40 Watts Max
MIN 90°C SUPPLY
CONDUCTORS

Install bulb and be sure
to test fixture **BEFORE**
trimming.

NOTE: Hang drop "C"
from scallop, **NOT**
through the loop on the
gallery.

7 Attach the bottom
finial section by
attaching the jackchain into
the half ball located on the
bottom of the frame.


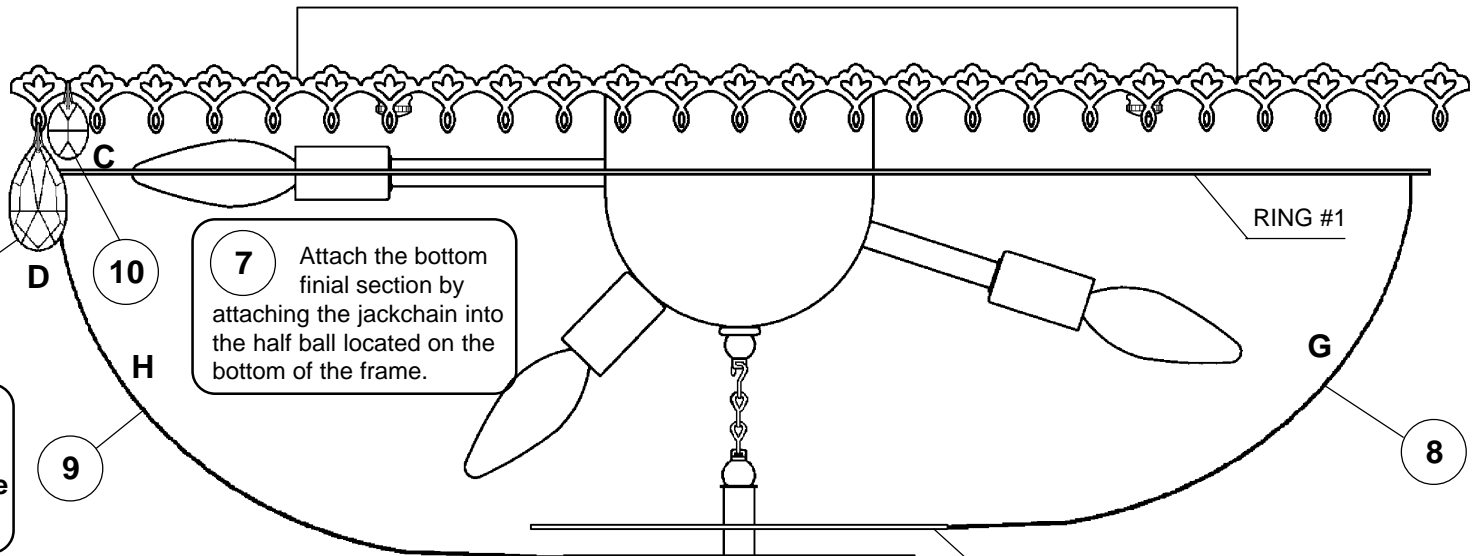


DIAGRAM #1



NOTE: Larger jewels at top and graduates
to smaller jewels toward bottom of chain.

NOTE: Raise the large
finial washer for easier
installation of Chains
"H".

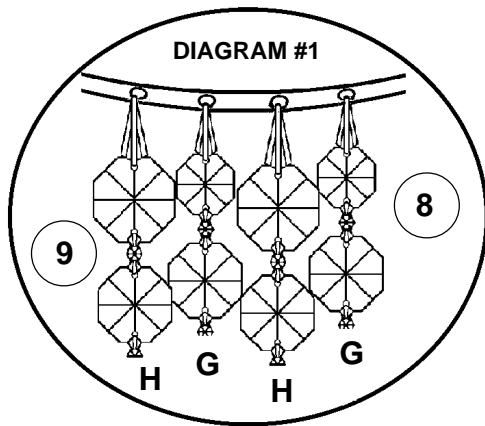