

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 8832-64

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE (Fig.1)

- Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
- Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
- Thread the two Studs (A) about 1/4" into the pre-drilled holes in the mounting strap spaced the same distance apart as the holes in the fixture canopy (B).
- Install the mounting strap to the Junction Box with the two Junction Box Screws as shown. The side of the mounting strap marked "GND" must face out.
- While holding the canopy and lamp cluster towards the ceiling, connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. You may have to wrap the connections with electrical tape. If there is a Ground Wire (green or bare copper) in your outlet box, connect the fixture's Ground Wire to it. Otherwise connect fixture's ground wire directly to the mounting strap with the Green Screw provided. After wires being connected, tuck them carefully inside the Junction Box.
- Attach the top finial (D) to top of the fixture body (E) by turning it clockwise until tight.
- Attach the lower finial (F) to bottom of the fixture body (E) by turning it clockwise until tight.
- Raise the iron frame (G) onto the socket of the fixture body (E) then secure it in place with the collar ring (H) and the check ring (I) securely tighten.
- Then cover the junction box with the canopy (B), aligning the screw of mounting plate with the hole of canopy and lock it with brass ball (C).
- Install the light bulbs in accordance with the fixture specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**

Fig.1

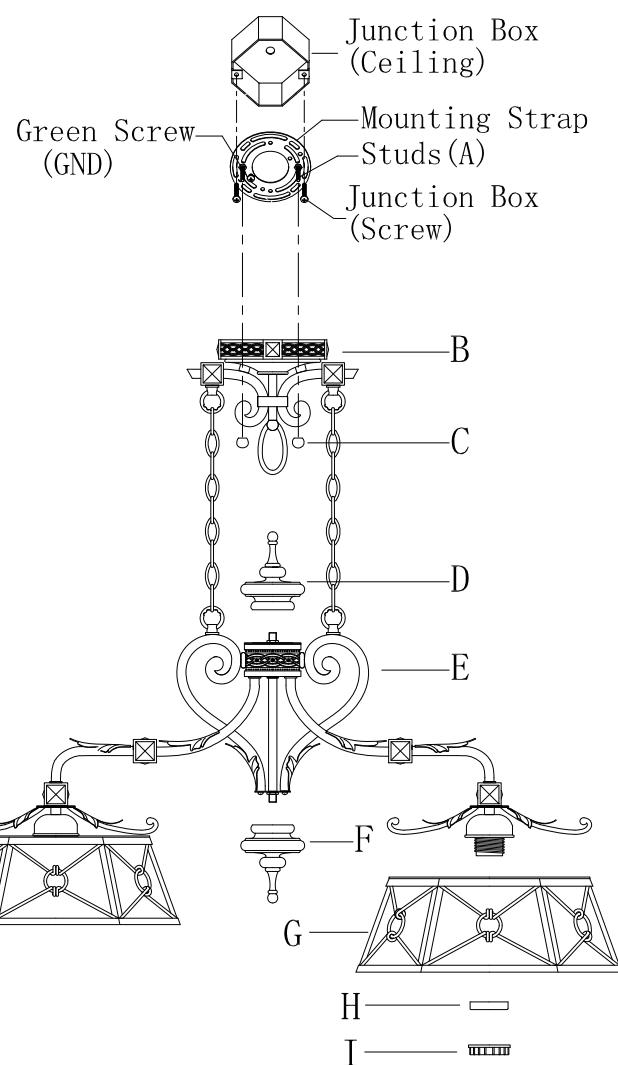


Fig.2

FIXTURE WIRES	HOUSE WIRES	FIXTURE WIRES	HOUSE WIRES	FIXTURE WIRES	HOUSE WIRES
Black or Smooth		White or Ribbed		Bare Copper (Ground)	Green or Bare Copper (Ground)
	HOUSE WIRES		White (Neutral)		
Black (Hot)					

Your installation is now complete. Return power to the junction box and test the fixture.

LIVEX®
LIGHTING