



Instructions for electrician STEPS 2 - 21

WARNING:

2





Electrical Danger




Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

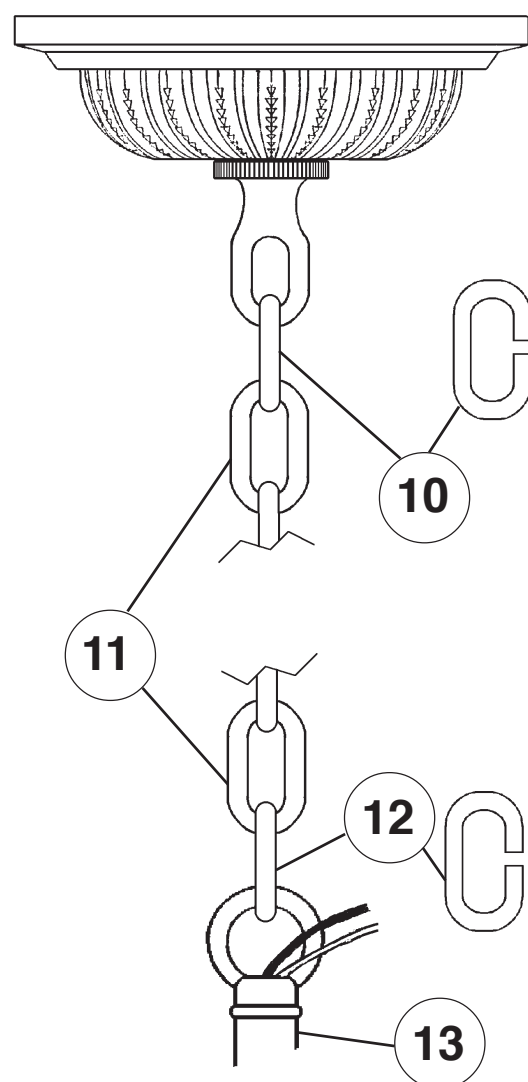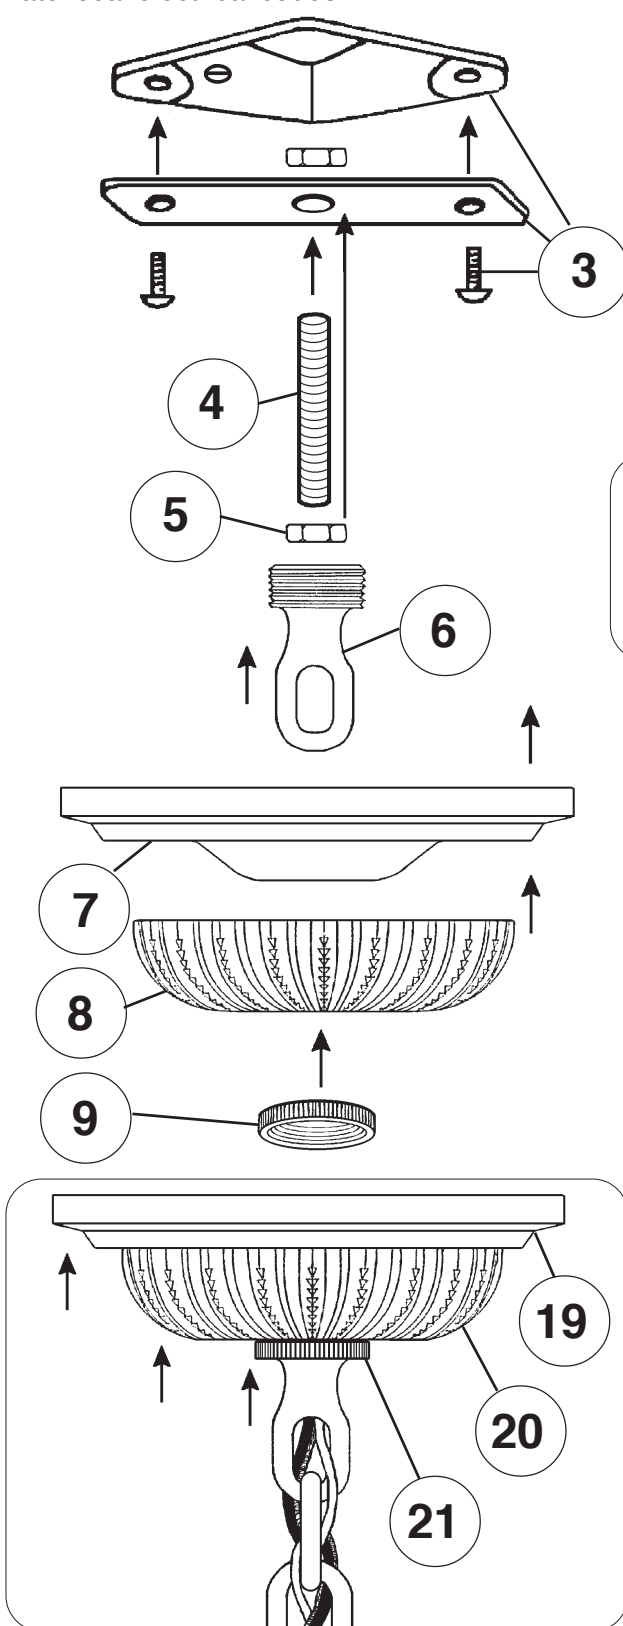

MAKE SURE THE LOOSE GALLERY RING IS INSTALLED (SLIDE DOWN OVER CENTER COLUMN!) BEFORE CONNECTING FIXTURE WITH CONNECTING LINKS!!

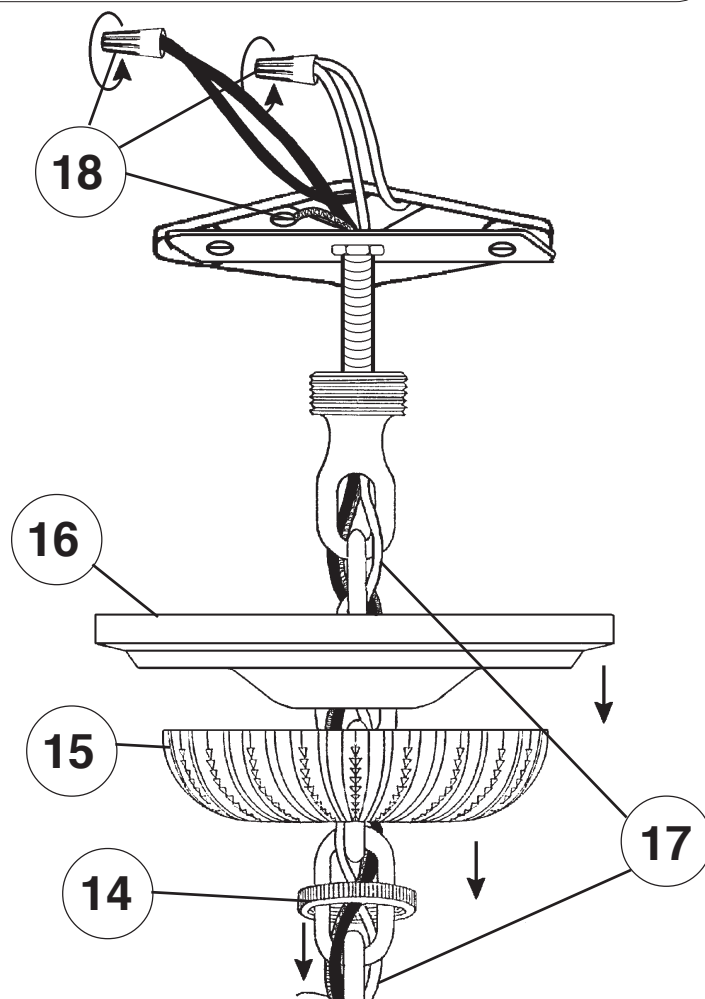

CHANDELIER 6618-____A TRIM DIAGRAM

(Finish Option)



THIS DESIGN IS THE PROPRIETARY TRADE DRESS/TRADE MARK OF SCHONBEK WORLDWIDE LIGHTING INC.

23 Lights
Diameter: 24"
Body Length: 34"
Hanging Weight: 22 pounds

SCHONBEK®

See diagram on back page
Follow steps in exact order
Save this trim diagram for future reference

1

IMPORTANT


Person who opens carton should record the following information for future service.

CODE # _____ Four-digit number on outside of carton.
PACKER # _____ See crystal package label.
ORDER # _____ See crystal package label.

SCHONBEK IS A WORLD LEADER IN CHANDELIER DESIGN. PATENTS INCLUDE:
#D5,144,541

Instructions for crystal trimming
STEPS 22 - 28

22



You will need 23 - B10
25 Watts Recommended
60 Watts Max


Install bulbs and be sure
to test fixture BEFORE
trimming.

LOOSE
GALLERY
RING

MAKE SURE THE LOOSE
GALLERY RING IS
INSTALLED (SLIDE DOWN
OVER CENTER COLUMN!)
BEFORE CONNECTING
FIXTURE WITH CONNECTING
LINKS!!


23 Hook Chains "A" into the top inside ring pin holes. Hook the other end into the loose gallery ring inside pin holes. NOTE: Small jewels on upper end with metal connectors facing outwards.

24 Slide Chains "B" (FLIP EVERY OTHER ONE) into the slots of the top gallery ring. NOTE: Hold onto the square stone and turn chain side ways, this will allow connector to pass through slot in metal ring. Turn square stone to face the outside of the fixture and lower it until it seats itself in the ring.




25 Hook the finial into the bottom of the frame.

26 Hook Chains "C" into the middle gallery ring #4. NOTE: Hold onto the square stone and turn chain side ways, this will allow connector to pass through slot in metal ring. Turn square stone to face the outside of the fixture and lower it until it seats itself in the ring. Hook the other end into the outside pin holes of ring #5.



27 Hook Chains "D" into the middle gallery ring #6. NOTE: Hold onto the square stone and turn chain side ways, this will allow connector to pass through slot in metal ring. Turn square stone to face the outside of the fixture and lower it until it seats itself in the ring. Hook the other end into the pin holes of the finial.



28 Hook Ball "E" into the knob located at the bottom of the finial.

