





Schonbek Worldwide Lighting Inc., 61 Industrial Blvd., Plattsburgh NY 12901-1908
 Tel: 800.836.1892 or 518.563.7500 www.schonbek.com or www.geometrix-lighting.com
 For cleaning instructions, visit www.schonbek.com or www.geometrix-lighting.com

© 2008 SCHONBEK WORLDWIDE LIGHTING INC., A. SCHONBEK & CO. LTD. WORLDWIDE COPYRIGHT RESERVED
 US UTILITY PATENT PENDING

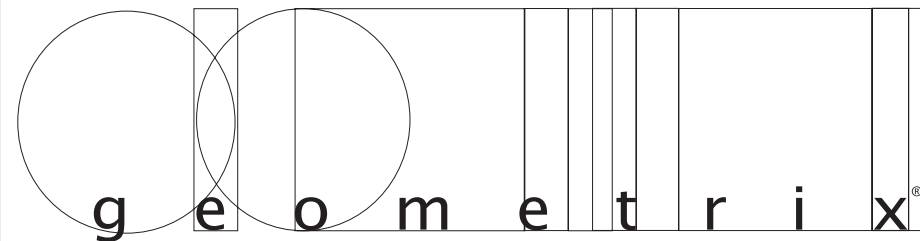

Trim Diagram
 Wall Sconce DIW0807A

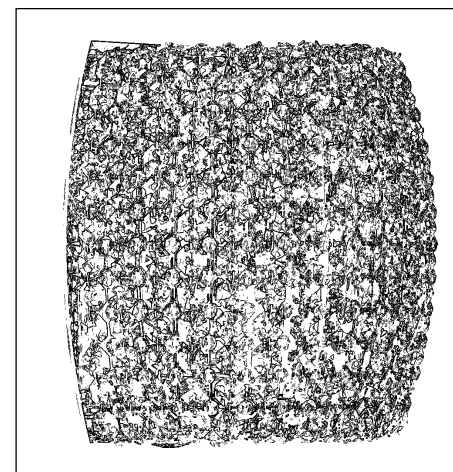

1 Light
 Diameter: 8"
 Length: 7"
 Extension: 4-1/2"

Geometrix[®] is designed by Schonbek
 with Swarovski Spectra[®] crystal.




This design is the proprietary trade
 dress/trademark of Schonbek Worldwide Lighting Inc.

Please save your trim diagram for future reference.

IMPORTANT: Label on back contains important
 information on your crystal. Please save in case you
 ever need to order matching crystal.






1 - A19, BT15, or JDD Bulb
(Halogen Bulb Recommended)
100 Watts Max
Hanging Weight: 4 lbs.

Install bulb and be sure to test
fixture BEFORE assembly.

CRYSTAL
BASKET

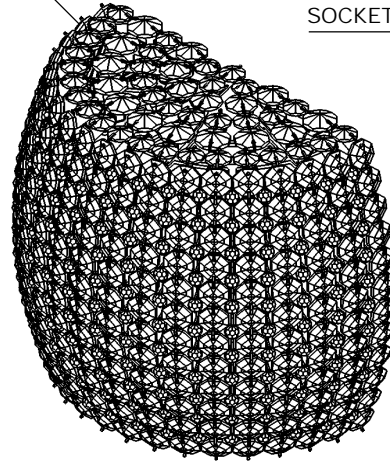


WASHER

WASHER STUDS

BACK PLATE

CAP NUT

SOCKET

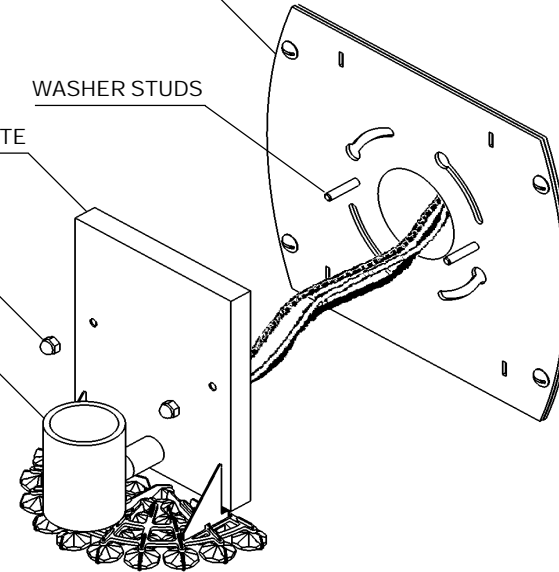

How to Install Bulb and Dionyx Wall Bracket:

- 1 Loosen the (2) cap nuts and separate the back plate from the washer.
- 2 Attach washer to outlet box with (2) screws (not supplied).
- 3 Feed stem and ground wires through washer, then attach to power wires and ground wire in outlet box.
- 4 Place back plate over washer studs and secure in place with (2) cap nuts previously removed.
- 5 Install bulb and be sure to test fixture before proceeding. Slide crystal basket over socket making sure the (4) tabs on the crystal basket line up with the (4) slots in the washer. The crystal basket simply rests in place.

Frequency of cleaning crystal

We know people who clean their crystal every few months, because they love handling the crystals and admiring them close up. Others do a cleaning every six or nine months.

To stretch the time between cleanings, dust lightly every two or three months with a feather duster, lambswool duster or make-up brush.

Frequency of cleaning depends on location of your Dionyx and other environmental factors.


Crystal needs cleaning when it appears dusty or dull. Just look at your Dionyx frequently (always enjoyable), and you'll know when it's time for a cleaning.

REPLACING CRYSTAL OCTAGON:

If a crystal octagon breaks, you'll see a bare spot in the framework.

A Turn both tabs 90° counter-clockwise on either side of pocket where the octagon should be.

B Slide crystal octagon into pocket. Turn both tabs clockwise back to original position to hold the octagon in place.

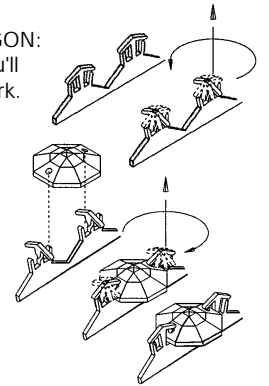

REPLACING CRYSTAL BEAD:

If a crystal bead breaks, you'll see a bare spot in the framework.

A Use needle nose pliers and pull the empty "L" bracket straight out.

B Slide crystal bead onto the bracket. Use your thumb and push the bead and bracket back into place.

