

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**

## ASSEMBLING THE FIXTURE (Fig.2).

1. Attach the loop (A) to center of the part (B) by turning it clockwise until tight.
2. Feed fixture wires through center tube (B) .Connecting center part (B) to top of the frame (H) and turn clockwise until firmly tightened.
3. Hook the end of arms (E) to the hook on the part (B) and the frame (H).
4. Hook the end of arms (N) to the hook on the part (B) and the frame (H).
5. Thread the nipple (J) into coupling located on bottom of the frame (H) and secure it with the hex nut (I). Raise the finial base (K) and the decorative arm (L) over the nipple (J) and thread the finial (M) onto the nipple (J).
6. Place the socket sleeve (F) over the socket (G) of the fixture body (H). Install the light bulbs and clip the cloth shades (D) on to the bulbs, then screw the finial (C) onto shades (D).
7. Install the light bulbs in accordance with the fixture specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**

## HANGING THE FIXTURE (Fig.1)

**IMPORTANT: For a safe and secure installation, this fixture must be installed by means of support that is independent of the outlet box.**

### SUGGESTED INSTALLATION:


1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
2. Provide a 1/4" IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet box as shown.
3. Assemble the ceiling loop, nipple, nuts and hickey to center 1/4"IPS support pipe and adjust overall length to allow the lock collar to hold the canopy flush to the ceiling. When the adjustments have been completed, secure the three (3) nuts, as shown.
4. Attach the chain to the fixture loop. Slip the lock collar and canopy over the upper end of the chain. Open the end link of the chain and lift the fixture to attach to the ceiling loop and secure the link.
5. Lace the fixture wires, ground wire and safety cable through the chain and loop, exiting through the side of hickey. Run the safety cable through the top of the outlet box and secure to structural member.

## CONNECTING THE WIRES (Fig.3)


1. Take the black wire from the ceiling junction box and the smooth wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wire until snug.
2. Repeat same process with white junction box wire and ribbed wire leg of fixture wire. **NOTE: Twist wires together in the same direction you twist the wire connector onto wires.**
3. If your junction box has a grounding wire (green or bare copper), attach this wire and the bare copper wire from the fixture together as step 1.If junction box has no ground wire, attach the bare copper fixture wire to the green ground screw on the crossbar.
4. Tuck these wire connections neatly into the ceiling outlet box and then raise the canopy all the way to the ceiling. Raise the loop and thread onto ceiling loop protruding through canopy.

Your installation is now complete. Return power to the junction box and test the fixture.

**Fig.1**

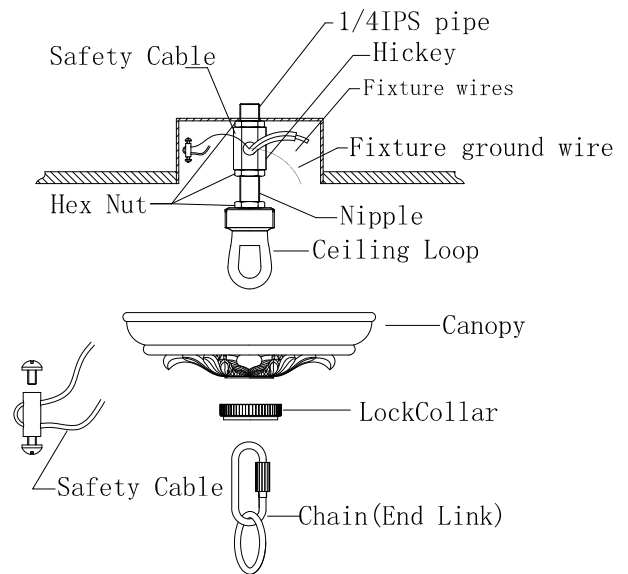

**Fig.2**

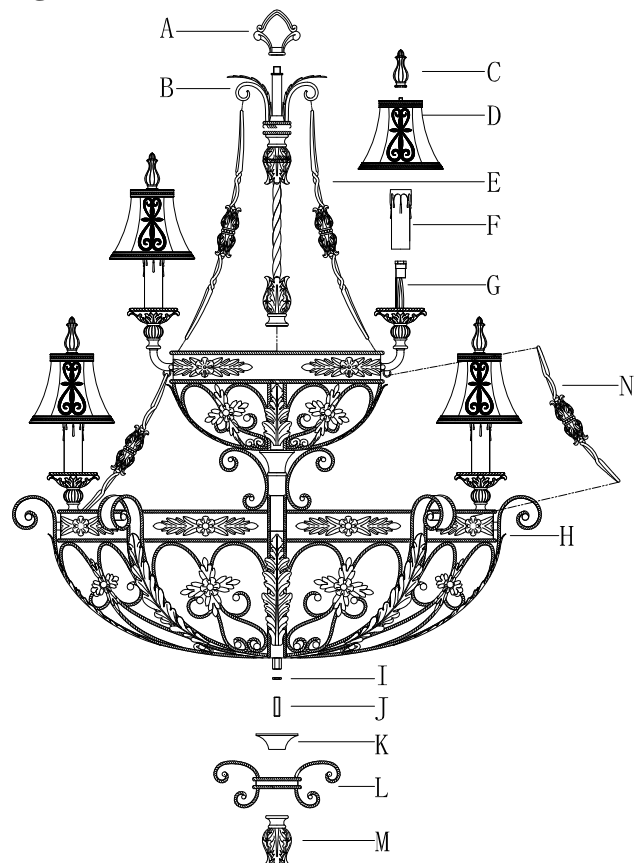

**Fig.3**

