MODERN FORMS®

2015 JUNE NEW PRODUCT

Table of Contents

LED BATH	Quantum	1		Cloud	9	New
	Aegean	3		Loft	11	New
	Seismic	5		Ledge	13	New
	Razor	7				
LED OUTDOOR	Ledge	15	New	Digitus	37	
LLD COTDOON	Berkeley	17	New	Hiline	39	New
	Kyoto	19		Twist	41	New
	Origami	21		Twilight	43	140 W
	Forq	23	New	Helix	45	
	Balthus	25	New	Phantom	47	New
	Window	27	New	Omni	49	. 10 11
	Pandora	29		Sentinel	51	
	Boule	31		Torch	53	
	Vitrine	33		Vessel	55	New
	Rain	35	New	Bloc	57	New
LED PENDANT	Suspense	59	New			
LED WALL SCONCES	Blade	61				
LED FLUSH MOUNTS	Vessel	63	New	Matrix	71	
	Bloc	65	New	Circa	73	
	Ledge	67	New	Sprocket	75	
	Razor	69		Dune	77	
LED TABLE AND FLOOR	Boxie	79				
LAMPS	Flat	81-84	ļ			
	Balance	85-88				



Quantum

Opulent jewelry quality crystals artfully illuminated with multipoint source LED technology for a spectacle of shimmering sparkle. Elegant design combining exquisite optic hand cut crystals with powerful LED illumination with beautiful color rendition. Ideal as a vanity luminaire for fine baths or as an elegant wall sconce in luxury hotels and fine homes. Available in four sizes.



12"

18"

28"

36"

WS-41512

WS-41518

WS-41528

WS-41536

Wattage

22.5W

37.5W

56.5W

78.5W

Voltage

120V

Lumens

1278

2117

3498

4439

Lumens

740

1260

2025

2790

Finish

PN Polished Nickel

р.З

Aegean

Emulating the calming effect of moving water. Elegant mouth blown white opal glass with cast metal framework. Mounts vertically or horizontally without transformer or driver as an elegant luminaire for a vanity or as an ADA sconce in a foyer or hallway. Four sizes available.










WS-45512

21½"

WS-45522

- · ADA compliant, low profile design
- CEC Title 24 compliant
- · Damp location listed
- · Dimming with electronic low voltage (ELV) dimmer
- · No transformer or driver required
- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 90



		Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
WS-45512	12"	9.5W		691	505			
WS-45522	211/2"	19W	1201/	1369	1040	DNI	Daliahad Niekal	The second second
WS-45531	31"	28.5W	120V	2017	1535	PN	Polished Nickel	4
WS-45541	401/2"	39W		2840	2050			

Example: WS-45531-PN




Seismic

Classic architectural styling and flattering light intersect in this open grid structure with an etched white glass layer. Accented with braces and struts in an elaborate design. Mounts vertically or horizontally as a vanity light in baths or as a wall sconce in corridors.











- · ADA compliant, low profile design
- CEC Title 24 compliant for WS-46518, WS-46527
- · Damp location listed
- Polished stainless steel material
- $\boldsymbol{\cdot}$ Dimming with electronic low voltage (ELV) dimmer
- · No transformer or driver required
- 277V option available special order
- 80,000 hour rated life
- · Color Temp: 3000K
- · CRI: 90





			LED	Delivered	
	Wattage	Voltage	Lumens	Lumens	Finish
 "					

WS-46518 18" 25.5W 1508 590 WS-46527 27" 39W 120V 2537 1215 SS Polished Stainless Steel WS-46537 37" 53W 3637 1625
--

Example: **WS-46527-SS**

For 277V special order, add an "F" before the finish: **WS-46518F-SS**





Razor

Raze the standard for fine bath lighting with these cutting edge aesthetics that leave the ordinary behind. Thick walled glass is uniformly lit framed in polished stainless steel. Suited for today's interiors, from traditional to contemporary in bronze and stainless steel.











- 11" 2½"
 - WS-47511



WS-47520



WS-47528




WS-47535

- ADA compliant, low profile design
- · Damp location listed
- CEC Title 24 compliant
- · Dimming with electronic low voltage (ELV) dimmer
- · No transformer or driver required
- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 90

		Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
WS-47511	11"	10W		679	385			
WS-47520	20"	19.5W	1201/	1287	690	BZ	Bronze	
WS-47528	28"	29.5W	120V	1978	1090	SS	Stainless Steel	
WS-47535	361/2"	39.5W		2613	1500			

Example: **WS-47528-SS**



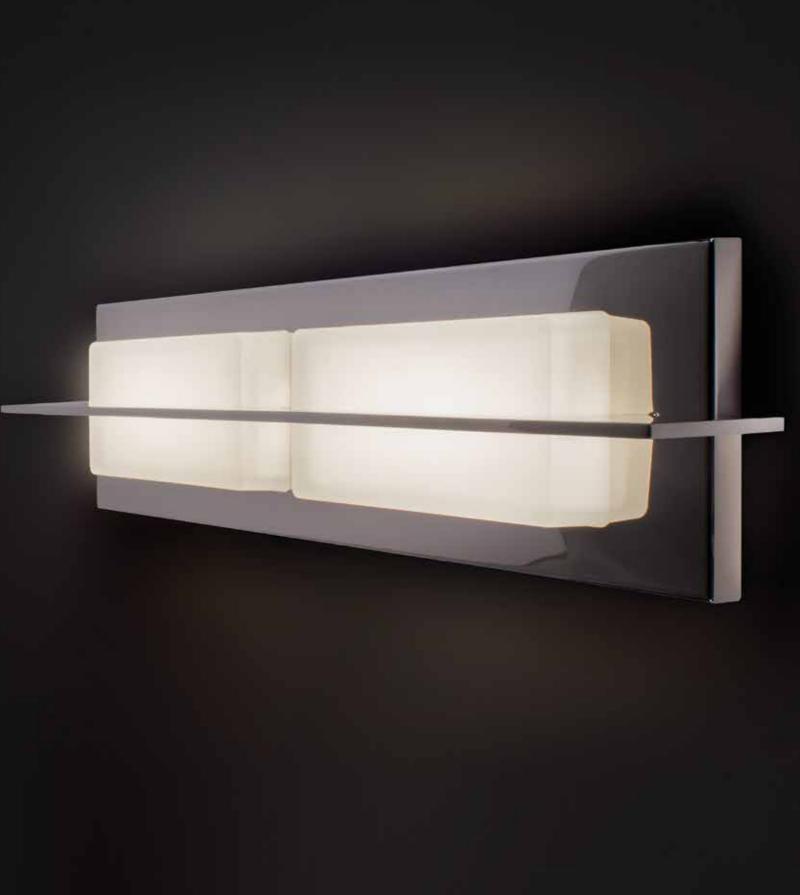



Cloud

Cloud combines a distinguished contemporary rectilinear profile with exaggerated proportions and concealed hardware. Designed to complement a diverse range of architectural interiors while delivering high quality functional illumination for upscale spaces.







- · Mounted vertically or horizontally
- · ADA compliant, low profile design
- Damp location listed
- When mounting as a bath light, larger sizes are recommended to maintain appropriate scale with vanities
- · Mitered glass
- Dimming with electronic low voltage (ELV) dimmer
- · Transformer located in outlet box
- Replaceable LED module
- 277V option available special order
- 60,000 hour rated life
- · Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3418 WS-3428 WS-3436	18" 28" 36"	15.5 36.5W 40W	120V	1199 1982 2171	655 916 1361	CH Chrome

458" 1838" WS-3418

20" -1

WS-3436

WS-3428

Example: WS-3428-CH

For 277V special order, add an "F" before the finish: WS-3428F-CH

Cloud

Loft

Understated simplicity and versatility to complement a broad range of interior schemes. Streamlined opal glass diffusers and fashionable back plates epitomize a polished aesthetic and contemporary design for baths and hallways.

- · Damp location listed
- CEC Title 24 compliant for WS-3611, WS-3618 and WS-3624
- · ADA compliant, low profile design
- · Mouth blown etched opal glass
- · Dimming with electronic low voltage (ELV) dimmer
- · Transformer located in outlet box
- · 277V option available special order
- Replaceable LED module
- 80,000 hour rated life
- · Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90



May mounted vertically or horizontally



New 32 inch Size




Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish	
WS-3611	11"	9W	120V	1235	630	BN Brushed Nickel CH Chrome	

Example: WS-3611-BN

For 277V special order, add an "F" before the finish: **WS-3611F-BN** For 2700K add "-27"; 3500K add "-35" before the finish: **WS-3611-27-BN**

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3618 WS-3624 WS-3632	18" 24" 32"	17W 22W 50.5W	120V	2468 3229 3726	1530 2045 2905	BN Brushed Nickel CH Chrome





Example: WS-3624-BN

For 277V special order, add an "F" before the finish: **WS-3624F-BN** For 2700K add "-27"; 3500K add "-35" before the finish: **WS-3632-35-CH**



Ledge New Collection

A luminous architectural profile and superior construction make this sconce appropriate for transitional and contemporary interiors or exteriors. Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Three sizes allow for cohesive specifications across residential and commercial applications.





- · ADA compliant, low profile design
- Aluminum construction with white mitered glass
- · Dimming with electronic low voltage (ELV) dimmer
- · 277V option available special order
- · Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finis	h	1
NS-1424 NS-1436	24" 36"	55W 91W	120V	2880 4566	1455 2235	AL BZ	Brushed Aluminum Bronze	5½"
			120V					5½"

WS-1424 / WS-1436

Example: WS-W1436-BZ

For 277V special order, add an "F" before the finish: WS-W1436F-BZ For 2700K add "-27"; 3500K add "-35" before the finish: WS-W1424-35-AL



Ledge New Graphite and Bronze Finishes

A luminous architectural profile and superior construction make this sconce appropriate for transitional and contemporary interiors or exteriors. Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Three sizes allow for cohesive specifications across residential and commercial interior and exterior applications.





- Wet location listed
- · CEC Title 24 compliant
- ADA compliant, low profile design
- Aluminum construction with white mitered glass
- · Dimming with electronic low voltage (ELV) dimmer
- · Transformer located in outlet box
- · 277V option available special order
- Replaceable LED module
- 80,000 hour rated life
- · Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish 4" \ 6"	4" 5"	T
WS-W1408 WS-W1414 WS-W1420	8" 14" 20"	11.5W 19.5W 29W	120V	525 910 1575	340 670 1050	AL Brushed Aluminum BK Black BZ Bronze GH Graphite	14" 8" <u> </u>	20
Example: WS For 277V spec For 2700K ad	cial orde	r, add an				\\/\S_\\/\1/	08 WS-W1414	WS-W1420

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finis	h	
WS-W1412	12"	29W	120V	1200	690	BK BZ	Brushed Aluminum Black Bronze Graphite	

WS-W1412

4" 8"

Example: WS-W1412-AL

For 277V special order, add an "F" before the finish: WS-W1412F-AL For 2700K add "-27"; 3500K add "-35" before the finish: WS-W1412-35-GH





Berkeley

Arts and crafts styling with a refreshing twist. The enduring look of forged iron over mouth blown etched opal glass. A handsome addition to any setting.



- · ADA compliant for WS-W21511, WS-W21516, low profile design
- Wet location listed, IP65 rated
- CEC Title 24 compliant for WS-W21511
- · Weather resistant powder coated finish
- Solid aluminum construction
- · Dimming with electronic low voltage (ELV) dimmer
- · No transformer or driver required
- \bullet 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 90





		Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W21511	11"	15.5W		674	370	
WS-W21516	16"	19.5W	120V	1062	555	BZ Bronze
WS-W21521	21"	26.0W		1443	985	

Example: WS-W21516-BZ



Kyoto

A Shinto inspired architectural design.

Miter cut and joined white glass provides crisp lines to complement the hardware lines.


Three sizes offered.



- ADA compliant, low profile design
- Wet location listed, IP65 rated
- CEC Title 24 compliant
- · Mitered glass and aluminum construction
- Dimming with electronic low voltage (ELV) dimmer
- No transformer or driver required
- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 90







		LED	Delivered	
Wattage	Voltage	Lumens	Lumens	Finish

	VVC	attage v	onage	Lumens	Lumens	FILIISH
WS-W22510	0"	10W		616	330	
WS-W22514	4" 1.	5.5W	120V	918	465	BZ Bronze
WS-W22520 2	20" 2	6.5W		1620	840	

Example: WS-W22520-BZ







Origami


Style unfolds with this distinctive sculpted wall sconce for a shadowbox effect. A curvaceous form accents and grazes the wall while enhancing the space. Perfect for fine interiors and exteriors that require an innovative decorative accent.



- Wet location listed, IP65 rated
- Dark Sky Friendly
- · Aluminum construction
- · Dimming with electronic low voltage (ELV) dimmer
- · No transformer or driver required
- 50,000 hour rated life
- · Color Temp: 3000K
- CRI: 85

	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
WS-W27515	8W	120V	210	150	BZ Bro	nze	

Example: WS-W27515-BZ










Forq


Tall and austere. A simple form presents from the wall behind it while enhancing the sense of space by drawing the eye to the wall color.

Rated for interior and exterior applications.





- · ADA compliant, low profile design
- · Wet location listed
- Aluminum construction
- · Dimming with electronic low voltage (ELV) dimmer
- 277V option available special order
- Replaceable LED modules
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90



New

Size

5½"	24"
5½"	8"
	WS-W1724

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish	
WS-W1718 WS-W1724	18" 24"	22W 33W	120V	1876 1546	790 1443	BK Black BZ Bronze GH Graphite WT White	

Example: WS-W1718-GH

For 277V special order, add an "F" before the finish: WS-W1718F-GH



Balthus


Heavy bronze hardware exhibits craftsman details. Mouth blown hammered clear glass creates resplendent sparkles on the wall.








- · Wet location listed, IP65 rated
- CEC Title 24 compliant
- Dark Sky Friendly
- Mouth blown hammered clear glass
- · Dimming with electronic low voltage (ELV) dimmer
- No transformer or driver required
- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 90





Wattage	Voltage	Lumens	Lumens	Finish
		LED	Delivered	

V	vallage	voitage	Lumens	Luillella	1 11 11 31 1		
WS-W28514 13¼" WS-W28516 16½"	10W	120V	478 481	455 465		Graphite Oil Rubbed Bronze	

Example: WS-W28514-ORB

Balthus



Window


Designed to display individually or in multiples to create diamond patterns and imaginative arrays on walls. Illuminated walls accentuate these geometric silhouettes and complement today's architectural elements.


New 12 inch Size





- · ADA compliant, low profile design
- \bullet Wet location listed, IP65 rated
- Integral transformer in canopy
- Can be mounted in various ways to create patterns, squares or diamonds on walls
- · Dimming with electronic low voltage (ELV) dimmer
- 277V option available special order
- 80,000 hour rated life
- · Color Temp: 3000K
- · CRI: 90






	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
WS-W29509 WS-W29512	19.5W 30W	120V	601 1212	485 880	BZ GH	Bronze Graphite	

Example: WS-W29509-BZ

For 277V special order, add an "F" before the finish: WS-W29512F-GH



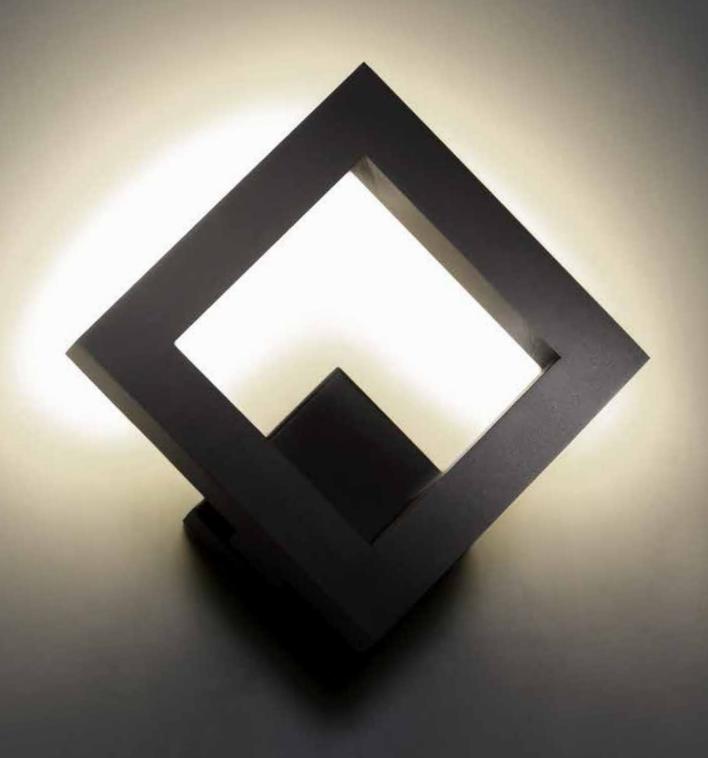



Pandora

A multi dimensional and versatile design. The sculpted sconce with a tiered design is hand finished in Oil Rubbed Bronze. Three sizes available.








- Wet location listed, IP65 rated
- · Aluminum construction
- $\boldsymbol{\cdot}$ Dimming with electronic low voltage (ELV) dimmer


11"

28W

- No transformer or driver required
- 50,000 hour rated life
- · Color Temp: 3000K
- CRI: 85







		Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
WS-W30507	7"	12W	120V	270	200			
WS-W30509	9"	20W	120V	546	410	ORB	Oil Rubbed Bronze	

550

415

120V

Example: WS-W30509-ORB

WS-W30511




Boule


Bring a timeless style element into your home. Sculptural clear hammered optic glass provides a brilliant glow and creates an exquisite textural display emulating the movement of water from within. An extraordinary design ideal for accenting doorways or foyers.





- Wet location listed, IP65 rated
- CEC Title 24 compliant
- · Mouth blown hammered clear glass with aluminum construction
- · Dimming with electronic low voltage (ELV) dimmer
- · No transformer or driver required
- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 90






		LED	Delivered	
Wattage	Voltage	Lumens	Lumens	Finish

•	vactage voice	age Lamens	Lamens			
WS-W31509 834" WS-W31511 1034"		0V 626 0V 627	585 620	ORB GH	Oil Rubbed Bronze Graphite	

Example: WS-W31509-ORB

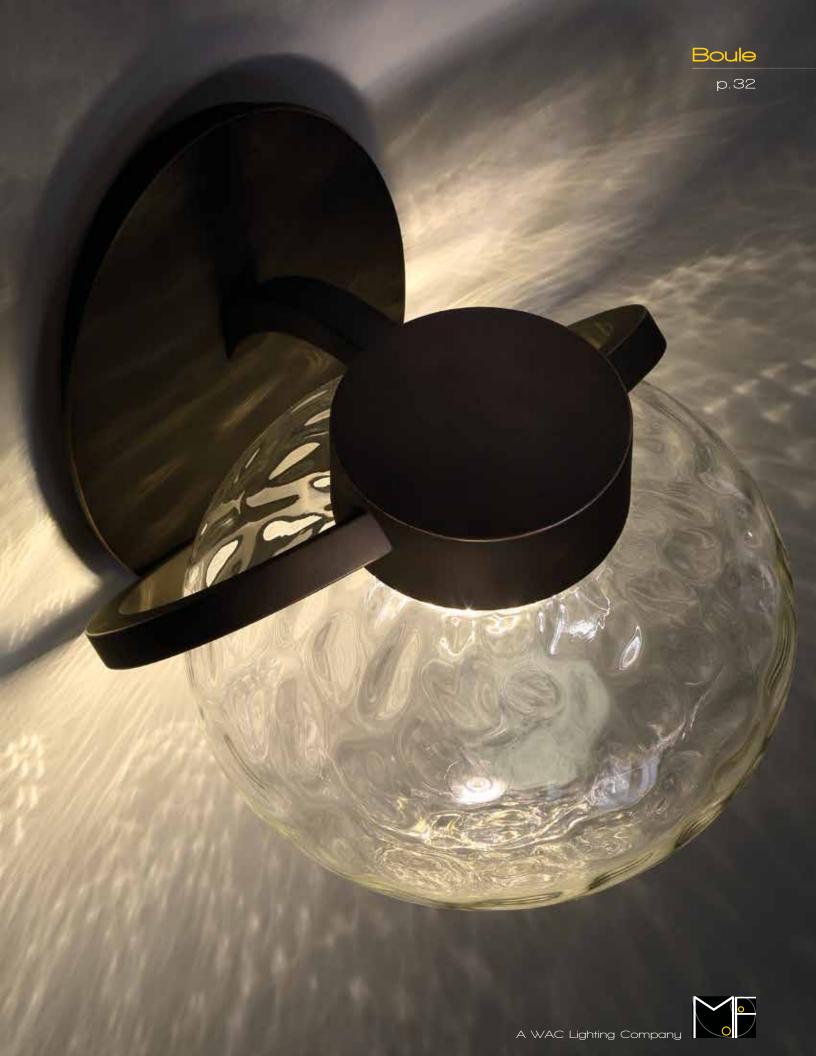

Vitrine

Raindrops falling gently on the window pane. This stunning effect is the result of concealed LEDs illuminating from above while casting a warm beam through clear hammered seeded, mouth blown optic glass. The durable body and minimalist design complement a multiplicity of architectural styles. Perfect for indoor and outdoor settings in luxury homes and resorts.





- Wet location listed, IP65 rated
- · Clear hammered seeded mouth blown glass
- · Dimming with electronic low voltage (ELV) dimmer
- No transformer or driver required
- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 90





				LED	Delivered		
		Wattage	Voltage	Lumens	Lumens	Finish	
WS-W32512	12"	5W	120V	230	205	BZ Bronze	
WS_W22516	16"	10 51//	1201/	380	365	G□ Granhit	

Example: WS-W32516-BZ



Rain

Evoking an image of gentle rainfall, this Zen luminaire uses LED technology to highlight the clear seeded glass in a dark sky and ADA compliant sconce. Two finishes and two sizes are available for various interior and exterior applications.




New 8 inch Size





- · ADA compliant, low profile design
- Wet location listed
- Dark Sky friendly
- · Aluminum construction with clear seeded glass
- · Dimming with electronic low voltage (ELV) dimmer
- Replaceable LED module
- · No transformer or driver required
- 50,000 hour rated life
- · Color Temp: 3000K
- CRI: 85



12"	3½" 7"
12	WS-W2416

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish	
WS-W2408 WS-W2412 WS-W2416	8" 12" 16"	8W	120V	215	145	BZ Bronze GH Graphite	

Example: WS-W2416-BZ



Digitus


A vertical illuminating element highlights the hand crafted qualities of this wall sconce design. The artistic represented wood grain lends an arts and crafts appeal to this unique sconce. Perfect for indoor and outdoor applications. The ADA design mounts in any orientation.



- · ADA compliant, low profile design
- · Wet location listed, IP65 rated
- · Backlit wall bracket with sand cast back plate
- · Aluminum construction
- · Dimming with electronic low voltage (ELV) dimmer
- No transformer or driver required
- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 90

	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
WS-W33518	15W	120V	94	85	ORB	Oil Rubbed Bronze	

Example: WS-W33518-ORB







Hiline

The Hiline luminaire features a sealed LED housing and clean, versatile Dark Sky and ADA design. This functional design is ideal for showing off multi tiered decks, stone patios or illuminating entry ways in luxury hotels and condos.





New 16 inch Size



- · ADA compliant, low profile design
- · Wet location listed
- Dark Sky friendly
- · Aluminum construction with etched glass light shield
- · Dimming with electronic low voltage (ELV) dimmer
- Replaceable LED module
- · No transformer or driver required
- 277V option available special order
- 50,000 hour rated life
- · Color Temp: 3000K
- CRI: 85



Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W2308 WS-W2312 WS-W2316	8" 12" 16"	8W	120V	280	245	BK Black BZ Bronze GH Graphite WT White

Example: WS-W2312-GH

For 277V special order, add an "F" before the finish: **WS-W2312F-GH**





Twist

Dramatically illuminated curvature. A multi-dimensional metal wall sculpture captivates from various directions in luxurious exterior and interior environments. The fluid hardware reveals a beautiful play of light and shadow within and architectural wall grazing without.






New Graphite Finish



- · Wet location listed
- · ADA compliant, low profile design
- · Up and down light
- \cdot Dimming with electronic low voltage (ELV) dimmer
- Replaceable LED module
- · No transformer or driver required
- 50,000 hour rated life
- · Color Temp: 3000K
- CRI: 85

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish	
WS-W5620	20"	16W	120V	960	260	BZ Bronze GH Graphite	

Example: WS-W5620-BZ





Twilight

Waning light of day through the trees. Indirect LED illumination gives the illusion of twilight. Glare free illumination with ambient and down lighting for safety, security and architectural accent.





- Customizable sconce frames a 10% " \times 315% " \times 2%" or 15" \times 5½ " \times 2%" piece of local art
- · Optional decorative trellis element included
- · ADA compliant, low profile design
- Wet location listed, IP65 rated
- · Dimming with electronic low voltage (ELV) dimmer
- Replaceable LED module
- · No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90


3¾"	7"	
£	16"	
	WS-W5516	

3%"	21"
LHJ	WS-W5521

					LED	Delivered		
Model		Width	Wattage	Voltage	Lumens	Lumens	Finish	
WS-W5516 WS-W5521	16" 21"	7" 9"	25W 28W	120V 120V	1060 1241	625 770	BZ Bronze GH Graphite	

Example: WS-W5516-BZ








Helix


Sleek and commanding, the dramatic curves and contours define this graceful design. Interest generating illumination with up and down light.





- Wet location listed, IP65 rated
- · Hand formed heavy aluminum gauge
- · Dimming with electronic low voltage (ELV) dimmer
- No transformer or driver required
- 50,000 hour rated life
- · Color Temp: 3000K
- CRI: 85






		LED	Delivered	
Wattage	Voltage	Lumens	Lumens	Finish

WC W24517	17"	014/	1201/	221	1.40	0.7	Duana	
WS-W34517	17	8W	120V	221	140	BZ	Bronze	A STATE OF THE STA
WS-W34524	241/8"	8W	120V	233	150	GH	Graphite	

Example: WS-W34524-GH

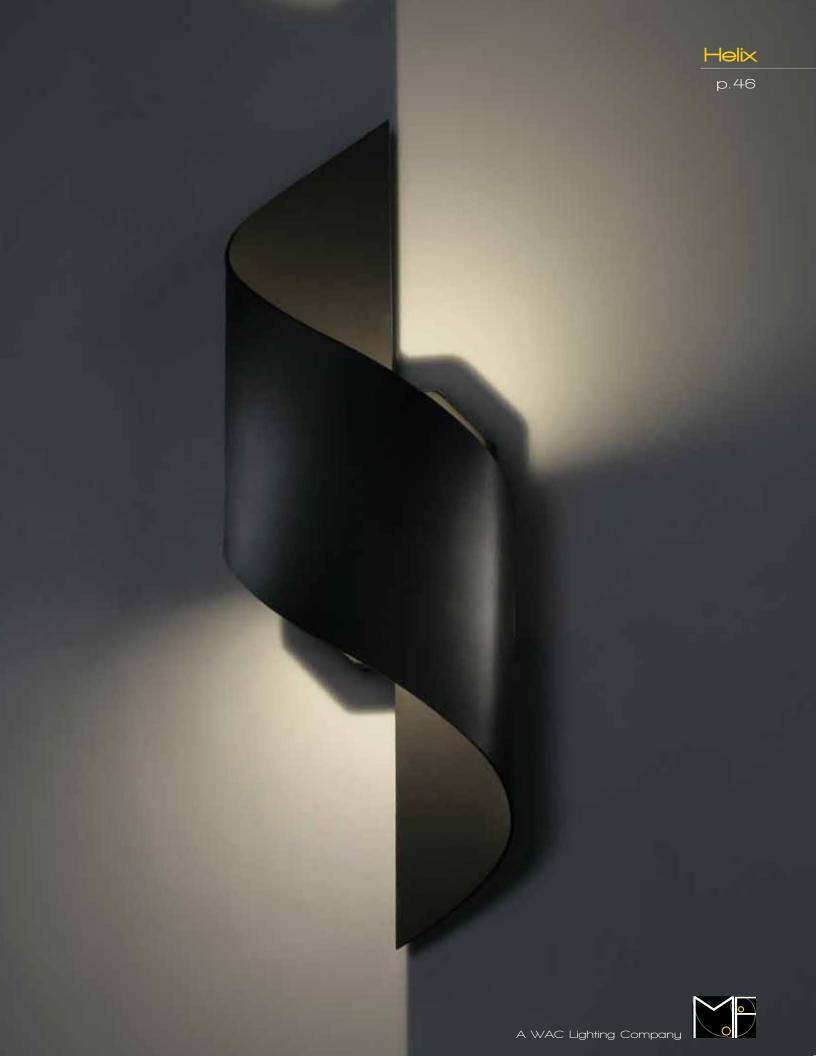



Phantom

A highly polished, stylish appearance with sharp curb appeal, this stunning family of distinctive mitered glass columns exhibits a shallow depth and clean, architectural look. Constructed in bronze powder coated aluminum or marine grade stainless steel and completely sealed for waterside locations in luxury residential and commercial environments.


New Graphite







- · ADA compliant, low profile design
- · Wet location listed
- SS 316 marine grade, stainless steel construction
- · Mitered white silk screened glass
- · Integral transformer in canopy
- · Dimming with electronic low voltage (ELV) dimmer
- 277V option available special order
- Replaceable LED module
- 60,000 hour rated life
- · Color Temp: 3000K
- CRI: 90

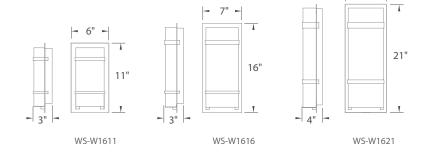

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1611 WS-W1616 WS-W1621	11" 16" 21"	12W 19W 21W	120V	491 859 1067	200 600 755	BZ Bronze GH Graphite SS Stainless Steel Construction

Example: WS-W1611-SS

For 277V special order, add an "F" before the finish: WS-W1611F-SS



Omni


LEDs sparkle mesmerizingly through glacial glass for interior or exterior applications. Sizes and finishes are available to illuminate any room with a brilliant combination of ambient lighting and down lighting. Weather proof stainless steel or bronze finishes complete this inspiring sconce.









- · ADA compliant, low profile design
- Wet location listed, IP65 rated
- Stainless steel or bronze aluminum
- Dimming with electronic low voltage (ELV) dimmer
- No transformer or driver required
- 50,000 hour rated life
- · Color Temp: 3000K
- CRI: 85







WS-W35520

		Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
WS-W35512 WS-W35516 WS-W35520	12" 16" 20"	8W 12W 16W	120V 120V 120V	145 200 300	75 90 150	SS BZ	Stainless Steel Bronze	

Example: WS-W35520-SS








Sentinel


Stately etched opal glass enhanced with a casted diamond bangle. Sumptuous aesthetics merges with advanced technology lighting for upscale spaces. Mounts upward or downward.





- Wet location listed, IP65 rated
- CEC Title 24 compliant
- · Aluminum construction with mouth blown etched opal glass
- · Dimming with electronic low voltage (ELV) dimmer
- No transformer or driver required
- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 90





WS-W36515

		Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
WS-W36515 WS-W36521	15" 21"	15W 24W	120V 120V	914 1488	580 965	ORB	Oil Rubbed Bronze	

Example: WS-W36521-ORB







Torch


Crowned with exquisite Piastra glass hand formed and crafted utilizing a 13th century artisanship technique, Torch illuminates with ambient interest while delivering down lighting for pathways and floors.





- · Wet location listed, IP65 rated
- Aluminum construction
- · Dimming with electronic low voltage (ELV) dimmer
- No transformer or driver required
- 50,000 hour rated life
- · Color Temp: 3000K
- · CRI:

CRI: 85	3000IX					1	
			LED	Delivered			
	Wattage	Voltage		Lumens	Finish		
WS-W37520	8W	120V	240	180	ORB	Oil Rubbed Bronze	
Example: WS-W	37520						







Vessel New Collection

A sleek, minimalist profile supported by precision engineering using advanced proprietary LED technology. Integral reflectors ensure high performance optics for accent and wall wash lighting, pathway and facade illumination and building security.

Dark Sky Friendly



Brushed Aluminum








Graphite White

Up & Down Light



Bronze

- Energy Star® rated for WS-W9101
- · ADA compliant, low profile design
- · Wet location listed, IP66 rated
- CEC Title 24 compliant
- Dimming with 0-10V or electronic low voltage (ELV) dimmer
- Universal driver (120V-220V-277V)
- 60.000 hour rated life
- · Color Temp: 3000K 2700K / 4000K available special order
- · CRI: 90




Туре	Model	Wattage	LED Lumens	Delivered Lumens	Finish		
Up / Down Dark Sky Friendly	WS-W9101	16.5W	1167	860	AL BK	Brushed Aluminum Black	
Up & Down Light	WS-W9102	29W	2334	1610	GH WT	Bronze Graphite White	

Example: WS-W9101-AL

For 2700K add "-27"; 4000K add "-40" before the finish: **WS-W9102-40-BZ**



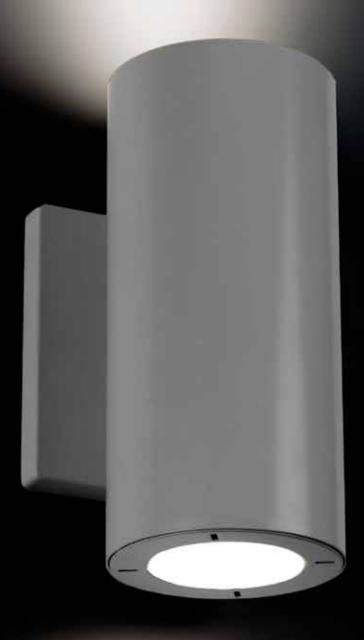





BIOC New Collection

Bold geometry and seamless forms with robust illumination for today's modern interiors and exteriors. Sleek die-cast aluminum construction reveals a silk-screened glass diffuser that renders upward and downward illumination. Also available for ceiling flush mounted luminaires, see page 65

Dark Sky Friendly



Black

Up & Down Light

Brushed Aluminum





Graphite




· Energy Star® rated for WS-W9201

- · Wet location listed, IP66 rated
- · CEC Title 24 compliant

White

- · Also rated for use in closets
- · Dimming with 0-10V or electronic low voltage (ELV) dimmer
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- · Color Temp: 3000K 2700K / 4000K available special order
- CRI: 90



WS-W9201 / WS-W9202

Type	Model	Wattage	Lumens	Lumens	Finish		
Up / Down Dark Sky Friendly	WS-W9201	16.5W	1167	945	AL BK	Brushed Aluminum Black	
Up & Down Light	WS-W9202	30.5W	2334	1930	GH WT	Bronze Graphite White	

LED

Delivered

Example: WS-W9202-GH

For 2700K add "-27"; 4000K add "-40" before the finish: WS-W9201-40-WT









- · Wet location listed
- Dark Sky friendly
- · Twist lock glass for minimal hardware
- Aluminum construction with a thick, mouth blown clear glass element
- · Integral transformer in canopy
- Universal driver (120V-220V-277V)
- · Dimming with electronic low voltage (ELV) dimmer
- · Replaceable LED module
- 50,000 hour potential life
- · Color Temp: 3000K
- CRI: 90

Model	Watt	LED Lumens	Photometric Lumens	Finish
PD-W1915	12W	722	677	AL Brushed Aluminum BZ Bronze

Example: PD-W1915-AL







Blade

A new slant on modern lighting. This low profile angular sconce deploys robust indirect illumination of walls and surfaces in two sizes for various applications.

The subtle graduated design offers a unique look and high style appeal.


- ADA compliant, low profile design
- CEC Title 24 compliant
- · Damp location listed
- Mounts only on a 2" x 4" vertical switch box
- · Dimming with electronic low voltage (ELV) dimmer
- · Conversion plate for 4" J box included
- · No transformer or driver required
- 277V option available special order
- 50,000 hour rated life
- · Color Temp: 3000K
- CRI: 90



					20			
		Wattage	Voltage	Lumens	Lumens	Finish		
WS-11511 WS-11522	11" 22"	9.5W 18.5W	120V 120V	753 1494	620 1253	AL WT	Brushed Aluminum White	

Example: WS-11522-AL

For 277V special order, add an "F" before the finish: **WS-11522F-AL**

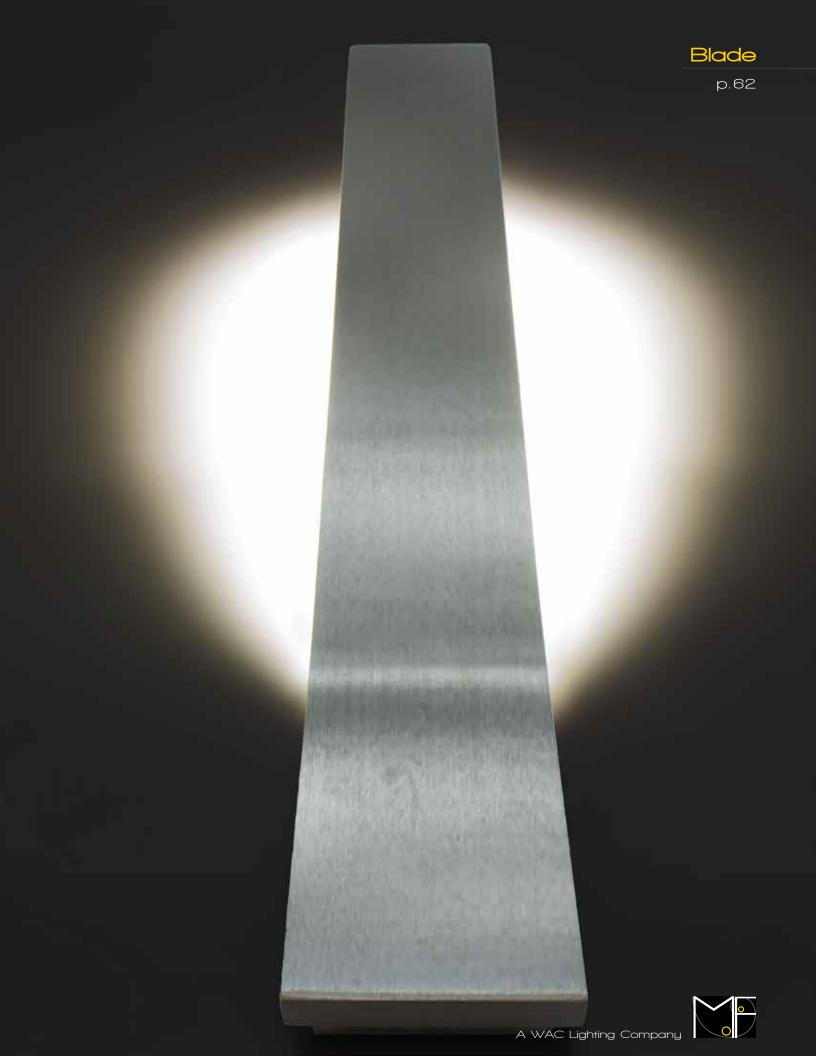

Vessel

New Collection

A sleek, minimalist profile supported by precision engineering using advanced proprietary LED technology. Integral reflectors ensure high performance optics for accent and wall wash lighting, pathway and facade illumination and building security.



Brushed Aluminum







Bronze



Black



Graphite

- · Wet location listed, IP66 rated
- CEC Title 24 compliant
- Dimming with 0-10V or electronic low voltage (ELV) dimmer
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- · Color Temp: 3000K 2700K / 4000K available special order
- CRI: 90



FM-W9100

Туре	Model	Wattage	LED Lumens	Delivered Lumens	Finish		
Flush Mount	FM-W9100	16.5W	1167	956	AL BK BZ GH WT	Brushed Aluminum Black Bronze Graphite White	

Example: FM-W9100-BK

For 2700K add "-27"; 4000K add "-40" before the finish: FM-W9100-40-AL





BIOC New Collection

Bold geometry and clean lines echo robust illumination for today's modern interiors and exteriors. Sleek die-cast aluminum construction reveals a silk-screened glass diffuser that renders upward and downward illumination. Available in ceiling and wall luminaires.



Brushed Aluminum



White



Bronze



Black



Graphite

- · Wet location listed, IP66 rated
- CEC Title 24 compliant
- · Also rated for use in closets
- · Dimming with 0-10V or electronic low voltage (ELV) dimmer
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- Color Temp: 3000K 2700K / 4000K available special order
- CRI: 90



FM-W9200

Туре	Model	Wattage	LED Lumens	Delivered Lumens	Finish		
Flush Mount	FM-W9200	16.5W	1167	945	AL BK BZ GH WT	Brushed Aluminum Black Bronze Graphite White	

Example: **FM-W9200-WT**

For 2700K add "-27"; 4000K add "-40" before the finish: **FM-W9200-27-GH**









Ledge

A luminous architectural profile and superior construction make this ceiling flush mount or wall sconce appropriate for transitional and contemporary interiors or exteriors.

Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Allows for cohesive specifications across residential and commercial interior and exterior applications.



Brushed Aluminum



Black

FM-1410

14%"

FM-1414

3½"

- · Wet location listed, IP65 rated
- · CEC Title 24 compliant
- · Also rated for use in closets
- ullet Dimming with electronic low voltage (ELV) dimmer
- · No transformer or driver required
- 50,000 hour rated life
- · Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90



Example: FM-1414-AL

For 277V special order, add an "F" before the finish: **FM-1410F-GH** For 2700K add "-27"; 3500K add "-35" before the finish: **FM-1410-35-AL**








Razor

A matching complement to the new family of Razor LED wall luminaires, this impressive flush mount provides bright and beautiful lighting for task and general applications in residential and hospitality environments. Thick walled glass enhanced with detailed crosshatch metal hardware also works well as an ADA sconce.




- · ADA compliant when mounted on walls
- Damp location listed
- CEC Title 24 compliant
- · Also rated for use in closets
- · Dimming with electronic low voltage (ELV) dimmer
- No transformer or driver required
- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 90

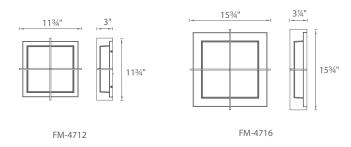

		Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
FM-4712	11¾"	21.5W	120V	1560	725	BZ	Bronze	~
FM-4716	15¾"	40W	120V	2800	1160	SS	Stainless Steel	

Example: FM-4712-SS

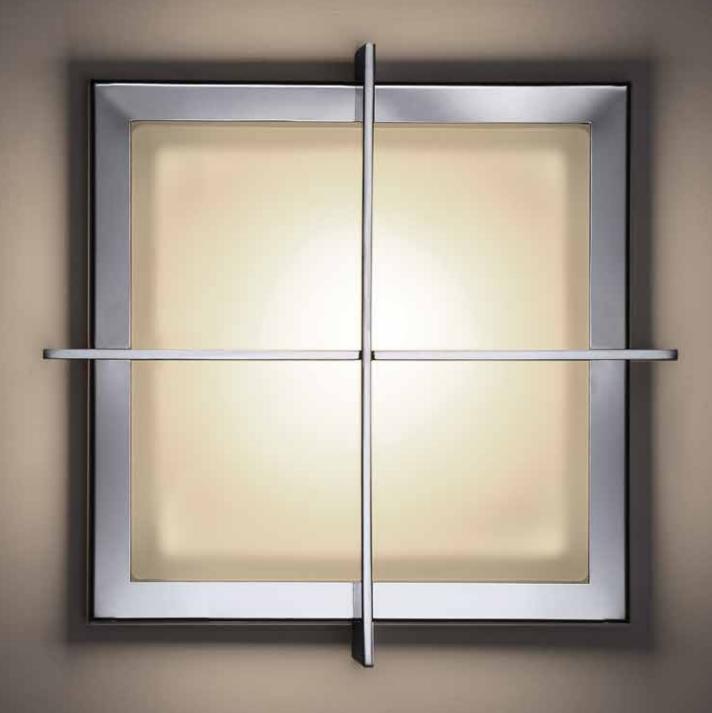




Matrix

Designed and crafted with clean square geometric styling, this sleek and simple ceiling luminaire blends with any residential or commercial setting. Optimal LED illumination delivers uniform bright lighting in nearly any room. Smooth thick wall etched glass is complemented with a stunning new Titanium finish.



- · Illuminates evenly without hotspots or shadowing
- · Wall or flush mount
- Damp location listed
- Also rated for use in closets
- · Dimming with electronic low voltage (ELV) dimmer
- Transformer located in outlet box
- 277V option available special order
- 50,000 hour rated life
- · Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90



	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		_
FM-2009-30 9"	27W	120V	1376	910	тт	Titanium	

Example: FM-2009-30-TT

For 277V special order, add an "F" before the color temperature: **FM-2009F-30-TT** For 2700K add "-27"; 3500K add "-35" before the finish: **FM-2009-27-TT**





Circa

Bright ambient illumination evokes from a clean, round white glass that fits perfectly into handsome finished hardware to match seamlessly with any décor in residential and commercial settings. Advanced LED technology delivers high output and CRI.



- Illuminates evenly without hotspots or shadowing
- · Wall or ceiling mount
- · Damp location listed
- · Also rated for use in closets
- Dimming with electronic low voltage (ELV) dimmer
- 277V option available special order
- 50,000 hour rated life
- · Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90



	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
FM-2111-30 11"	31W	120V	1635	940	TT T	ītanium	_

Example: FM-2111-30-TT

For 277V special order, add an "F" before the color temperature: **FM-2111F-30-TT** For 2700K add "-27"; 3500K add "-35" before the finish: **FM-2111-35-TT**








Sprocket

Scalloped pressed glass acid etched soft white. A ceramic white interior ensures even illumination. Low profile design dims beautifully and renders exquisite color with extended life.



- ${\boldsymbol{\cdot}}$ Illuminates evenly without hotspots or shadowing
- · Wall or ceiling mount
- · Damp location listed
- Transformer located in outlet box
- · Also rated for use in closets
- · Dimming with electronic low voltage (ELV) dimmer
- 277V option available (special order)
- 50,000 hour rated life
- · Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90



		Wattage	Voltage	LED Lumens	Delivered Lumens	Finish		
FM-4809-30 FM-4812-30	10" 12"	27W 31W	120V 120V	1392 1646	695 875	BN	Brushed Nickel	

Example: **FM-4812-30-BN**

For 277V special order, add an "F" before the color temperature: **FM-4812F-30-BN** For 2700K add "-27"; 3500K add "-35" before the finish: **FM-4812-27-BN**







Dune

A luminous centerpiece for any room. Mouth blown etched opal glass with an intriguing subtle profile. Perfect for wall and ceiling illumination. Full range dimming control. Available in two sizes.



- · Wall or ceiling mount
- · Damp location listed
- Transformer located in outlet box
- · Also rated for use in closets
- · Dimming with electronic low voltage (ELV) dimmer
- 277V option available (special order)
- 50,000 hour rated life
- · Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90





		Wattage	Voltage	LED	Lumens	Finish		
FM-4913 FM-4916	13" 16"	26.5W 31W	120V 120V	1400 1573	880 1085	BN	Brushed Nickel	-

Example: FM-4916-BN

For 277V special order, add an "F" before the finish: **FM-4916F-BN** For 2700K add "-27"; 3500K add "-35" before the finish: **FM-4913-35-BN**







Boxie

Minimalism as an art form. This modern task light adjusts smoothly and easily with grace and sophistication while integrating an LED module and movable arm. Dimming is easy with a fingertip touch dimmer.



	Wattage	Voltage	LED Lumens	Delivered Lumens	Finis	h	
TL-1210	12W	120V	900	815	AL BK FR	Brushed Aluminum Black Ferrari Red	


Example: TL-1210-BK





Flat

This minimalist, modern floor lamp flips up with an LED module utilizing an adjustable arm while still staying true to its style. Great for small spaces, this lamp folds up for storage. The compact, high-tech luminaire operates optimally on floors in fine homes and guest rooms. Fully dimmable, with a fingertip touch dimmer, for ease and convenience.



- Damp location listed
- · Fingertip touch dimming
- · Driver located at the plug
- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 85



	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FL-1150	12W	120V	943	785	AL Brushed Aluminum BK Black

Example: FL-1150-BK





Flat

This minimalist, modern task lamp incorporates an LED module with an adjustable arm that makes it the ideal luminaire for desktops, countertops and other work and reading surfaces. Ideal for small spaces, this lamp folds neatly out of the way. This compact, high-tech luminaire is



- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 85

	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
TL-1110	12W	120V	943	785	AL Brushed Aluminum BK Black

Example: TL-1110-BK








Balance

Flexible versatility greets a chic composition. The adjustable swing arm fully dimmable LED luminaire blends function with vibrant aesthetics. With fingertip touch dimming, precision lighting adjustment is available with easy access and control. Balance delivers robust illumination and remains cool to the touch.



- · Damp location listed
- Fingertip touch dimming on base
- · Driver located at the plug
- 80,000 hour rated life
- · Color Temp: 3000K
- CRI: 85



	Wattage	Voltage	LED Lumens	Delivered Lumens	Finis	sh	
FL-1050	11W	120V	630	455	AL BK MC	Brushed Aluminum Black Multicolor	

Example: FL-1050-BK



Balance

Flexible versatility greets a chic composition. The adjustable swing arm fully dimmable LED luminaire blends function with vibrant aesthetics. With fingertip touch dimming, precision lighting adjustment is available with easy access and control.



	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
TL-1010	11W	120V	630	455	AL Brushed Aluminum BK Black MC Multicolor

Example: **TL-1010-MC**





MODERN FORMS®

A WAC LIGHTING COMPANY

44 Harbor Park Drive

Port Washington, NY 11050

Tel: 516.515.5000

www.modernforms.com

Copyright 2015