Assembly Instructions For


40-1/2"


F2485/5 (E) 5/09

46-1/2"

52-1/2"

58-1/2'

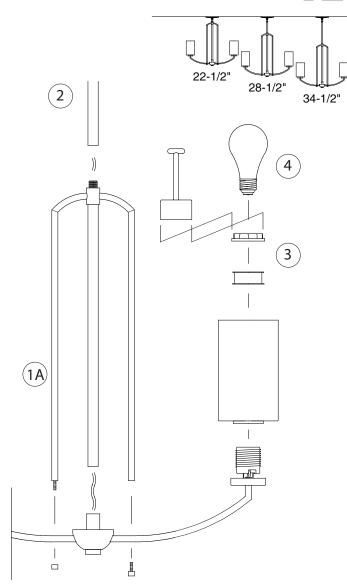



IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

64-1/2"

70-1/2"

76-1/2"

Carefully unpack and identify all parts before assembly. Bulb not included.

- Install upper assembly onto lower assembly.
 A. Lower the upper assembly while pulling fixture wires from above.
 - B. Insert center tube and one side tube (with stud pre-attached) simultaneously onto corresponding holes on the lower assembly. Then secure the side tube by fastening with a cap nut.
 - C. Secure rest of side tubes with cap screws.
- 2. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
- Install shade onto fitters by fastening with spacer tube and counter ring. Use supplied wrench to tighten counter ring.
- Install light bulb (not included). See relamping label at socket area for type and maximum allowed wattage.

