


Assembly Instructions For **OL6011, OL6012** (E) 10/07

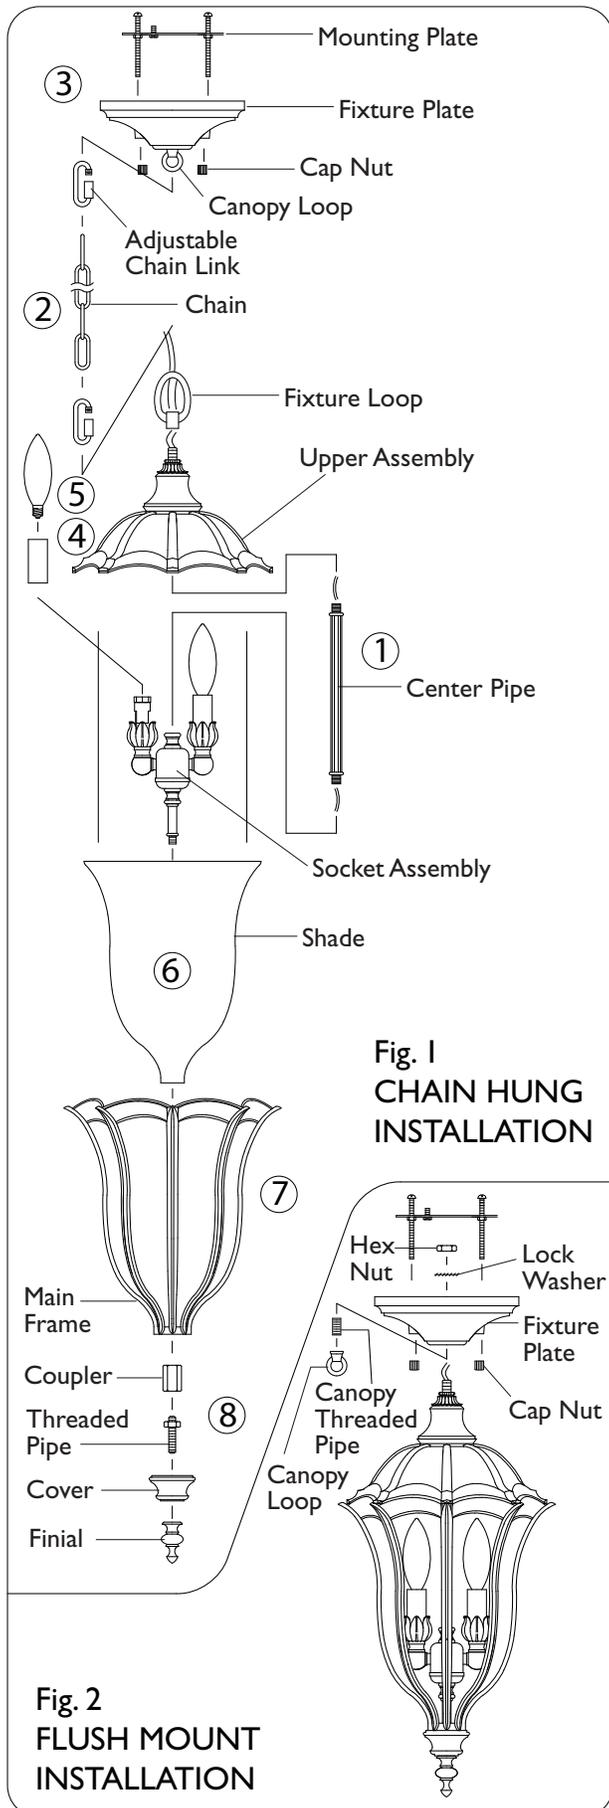

IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.


1. Take the fixture wires and ground wire, which are located at top of the socket assembly, and thread through center pipe and upper assembly. Then screw bottom end of the center pipe into the upper assembly.
2. This fixture can be mounted onto ceiling either as chain hung or flush mount:

CHAIN HUNG INSTALLATION- Fig. 1:

- A. Take fixture wire (with plastic insulation) and ground wire and thread through fixture loop. Then install loop onto threaded pipe located at top of lantern.
- B. Determine the desired length of chain to hang. Remove any unwanted links with chain pliers.
- C. This fixture is supplied with 2 adjustable chain links. These links are opened and closed by twisting cylinder on chain link. One adjustable chain link should be installed onto fixture loop and the other should be installed onto canopy loop. The standard chain should be installed in between these 2 adjustable chain links.
- D. Take ground wire and weave through above chain links, then thread through center hole in canopy loop. Repeat with fixture wire (wire with plastic insulation).

FLUSH INSTALLATION- Fig. 2:

- A. Remove and discard canopy loop, and threaded pipe from canopy.
 - B. Thread fixture ground wire and fixture wire through canopy, lock washer, and hex nut. Lock all together on top of fixture by tightening hex nut onto top threaded pipe.
3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
 4. Install candle tube onto sockets.
 5. Install light bulb (not included). See relamping label located near socket area for type and maximum allowed wattage.
 6. Gently place glass shade inside of main frame.
 7. Install main frame, along with glass shade, onto lantern by fastening with lock washer and coupler.
 8. Install a hex nut onto one end of threaded pipe leaving about 1/2" (13 mm) thread exposed. Screw same end of threaded pipe into coupler. Tighten hex nut. Then slide cover through threaded pipe locking in place with finial.



**MURRAY
FEISS**
Generation Brands™