


**IMPORTANT**  
**TURN OFF THE POWER AT THE MAIN FUSE**  
**OR CIRCUIT BREAKER BOX**  
**BEFORE STARTING INSTALLATION**

**Carefully unpack and identify all parts before assembly.**

1. A. Thread fixture wires, which are located above socket assembly, through short center pipe, top cover and fixture loop.  
 B. Install short center pipe by screwing into socket assembly.  
 C. Install top end of pipe by screwing into top cover.  
 D. Install fixture loop by screwing onto top cover.  
 E. Install long center pipe onto harp by fastening with a hex nut from above. Note the correct position of pipe from left diagram.
2. Install lamp by pushing into socket. Do not twist.
3. Slide main frame up till it checks inside of top cover. Lock into position by fastening with finial.
4. Follow enclosed "Chain Suspended Fixture Installation Instructions" for electrical and fixture installation onto ceiling outlet box.

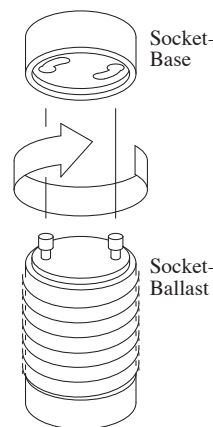

## TO REPLACE DEFECTIVE SOCKET-BALLAST:

1. Remove old defective socket-ballast by unscrewing from socket-base.
2. Install new socket-ballast by inserting into slots in socket-base, and then twist and lock.