
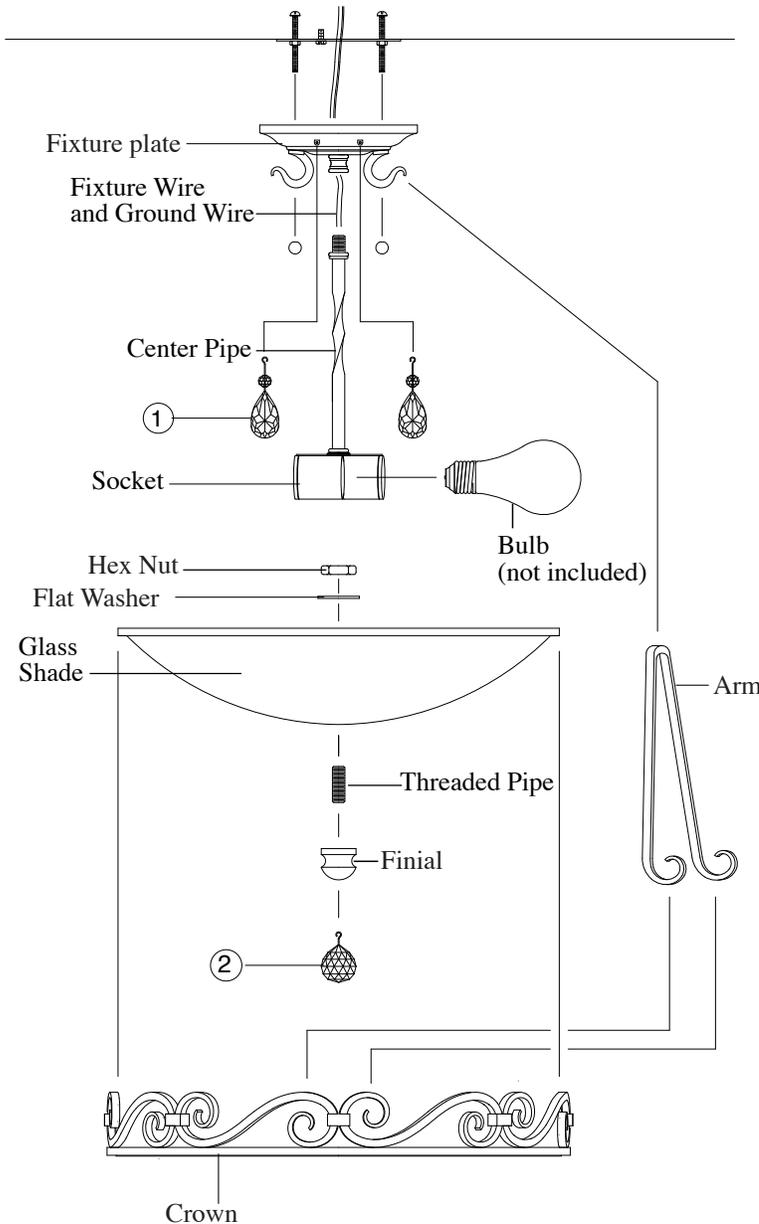


Note: Spare crystals enclosed in hardware bag.



**IMPORTANT**  
**TURN OFF POWER AT MAIN FUSE OR**  
**CIRCUIT BREAKER BOX BEFORE**  
**STARTING INSTALLATION**

Carefully unpack and identify all parts before assembly.  
 Bulbs are not included.

1. Thread ground wire and fixture wire through fixture plate. Screw threaded end of center pipe into fixture plate.
2. Install light bulbs (not included). See relamping label at socket area for type and maximum allowed wattage.
3. Take threaded pipe and screw into finial. Install finial onto bottom of glass shade by locking with flat washer and hex nut from other side. Do not over tighten hex nut.
4. Lay glass shade onto center of crown. Then while lifting crown above glass shade rim, hook arms onto every other curls of crown as shown in illustration. Note: Gently squeeze bottom ends of arm together in order to slip and hook onto curls. Repeat other arms.  
  
Temporarily lay hooked arms on inside of glass shade. Set them aside.
5. Follow enclosed “**Multiple Standard Installation Instructions**” for electrical and fixture installation onto ceiling outlet box.
6. Install glass shade and crown: While firmly holding onto crown, install top end of arms onto hooks located at fixture plate.
7. Hang all crystal glass parts as shown on drawing. **NOTE:** To replace broken crystals or pins extras are included in hardware bag. To replace broken crystals open pins, remove crystal, hook new one, then close back pin. Avoid bending pins into sharp angle.