


ASSEMBLY INSTRUCTIONS FOR WB1148:

(E) 09/01

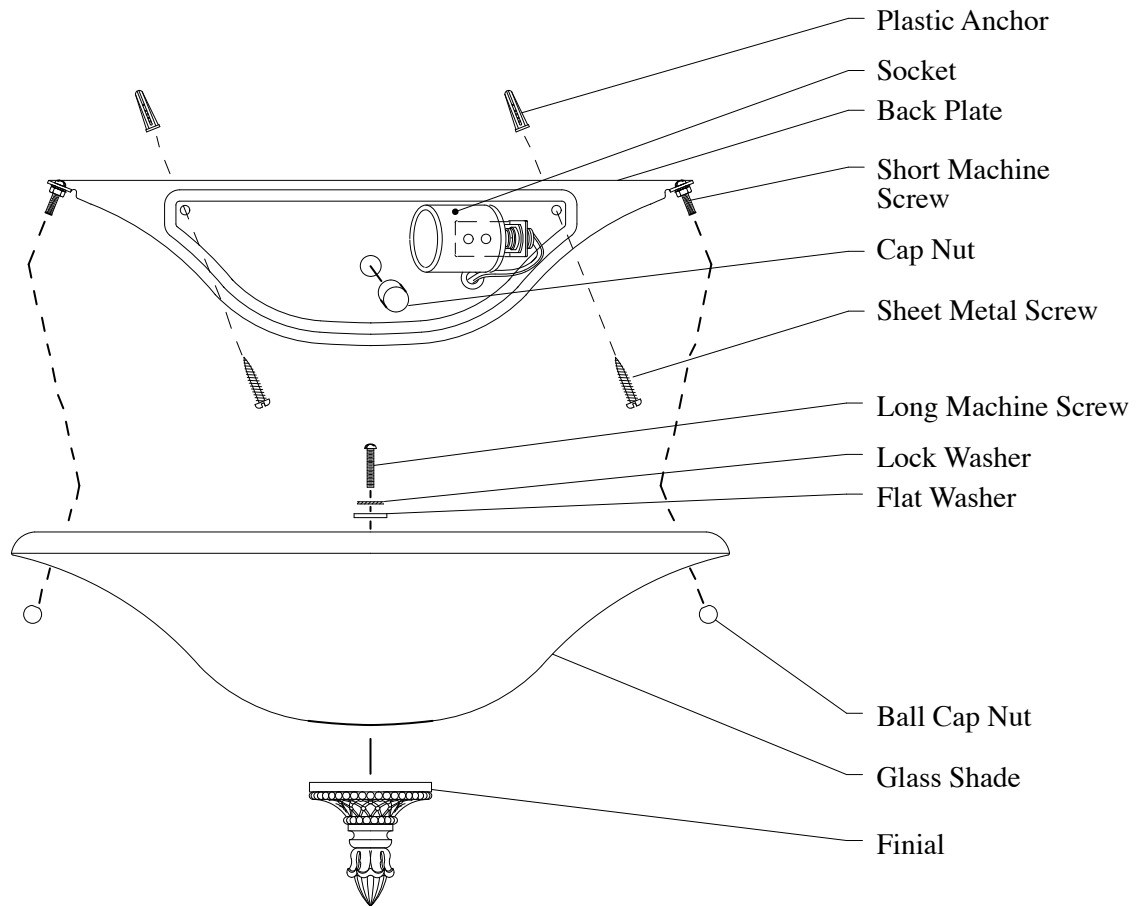

IMPORTANT:

Turn off power at main fuse or circuit breaker box before starting installation.

1. Carefully unpack and identify all parts before beginning assembly. Bulb not included.
2. Read and follow first the enclosed fixture installation instructions sheet for electrical and fixture installation onto wall outlet box before proceeding with below instructions.
3. After making certain back plate is leveled horizontally, take a pencil or pen and mark two holes on back plate. See above diagram.
4. Unscrew cap nut and detach back plate from wall. Do not remove wire connections.
5. Drill 3/16" pilot holes into wall where marked. Then insert provided plastic anchor into these holes. Install back fixture back plate by fastening with cap nut. Then fasten provided sheet metal screws into plastic anchors.
6. Install light bulb (not included). See relamping label located on socket area for bulb type and maximum allowed wattage.
7. Install finial onto bottom of glass shade by locking into place with flat washer, lock washer, and long machine screw from inside of glass shade.
8. Install glass shade to back plate by fastening two ball cap nuts onto screws on sides.

© FEISS INDUSTRIES

MURRAY FEISS