



Compact Fluorescent

**Wall Pack
Electronic Ballast**

Outdoor

Type _____


-20WB

P5960 ☐

P5961 ☐

Finish

Catalog No.	Antique Bronze	Lamping	Dimensions (Inches)		
			A	B	C
P5960	-20WB	2-13w Triple tube CFL (included)	14-5/8	5-1/2	7-3/8
P5961	-20WB	1-42w Triple tube CFL (included)	14-5/8	5-1/2	7-3/8

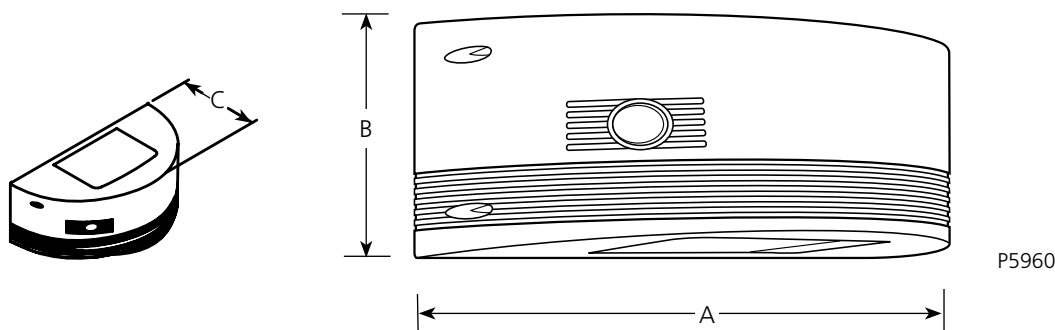

Specifications:

General

- Half round profile
- Antique Bronze polycarbonate UV stabilized construction
- Full Aluminum back for ballast heat sinking
- Top and bottom glass lens
- Shipped with metal panel installed behind top lens for total down lighting. Can be removed for up and down lighting
- Two 13w quad (P5960) or one 42w triple tube (P5961) CFL lamps included with unit, 3500K color temperature
- All units supplied with integral photocell

Mounting

- Wall or mounted between 8 and 12 feet
- Covers any standard 4" recessed octagonal outlet box
- Mounting strap for outlet box supplied

Electrical

- 120 volt HPF electronic ballast
- GX24q1 sockets on P5960, GX24q-4 on P5961

Labeling

- UL and CUL wet location listed

Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 2/11