


-09BW -09PR -174PA -174PR -09PW -174PW -09W -174W
P6178 ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Catalog No.	Finish		Glass		Lamping	Dimensions (Inches)		
	Brushed Nickel	Urban Bronze				A	B	C
P6178	-09BW	NA	White/	Black	12v T4 35w (Incl)	3-1/2	9	72
P6178	NA	-174PA	Amber	Pattern	12v T4 35w (Incl)	3-1/2	9	72
P6178	-09PR	-174PR	Red	Patterned	12v T4 50w (Incl)	3-1/2	9	72
P6178	-09PW	-174PW	White &	Black	12v T4 50w (Incl)	3-1/2	9	72
P6178	-09W	-174W	White		12v T4 50w (Incl)	3-1/2	9	72

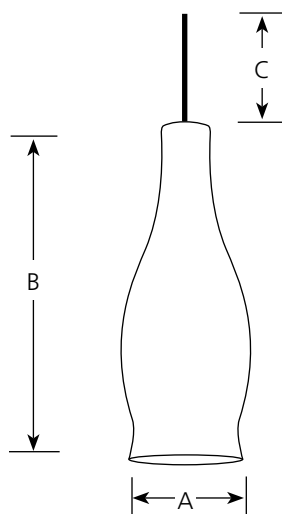

Specifications:

General

- Flex track mini-pendant
- Wine bottle shaped glass with white interior
- Plated brushed nickel (-09) or urban bronze (-174) finishes
- One 50w T4 lamp included
- Mounts anywhere along Illuma-Flex track sections, or on monopoints
- Includes adapter that allows unit to be mounted to P8516 transformer for Alpha track system also.

Mini pendant Support

- Attaches to Illuma-Track, P8516 transformer on Alpha track, or on P8780 monopoint with supplied fitter
- Can also be mounted on P8794 Designer monopoint by direct wiring.
- A small wiring compartment is located just below the fitter to allow adjustment of cord length
- Cord is Teflon coated copper wire with a silicon sleeve that matches the finish

Electrical

- Attachment to 12 volt Illuma-Flex track
Remove top cap, slide onto track from below, replace cap and tighten to clamp unit to track
- Attachment to Alpha Track
Remove cord from Illuma-Flex fitter, attach to Alpha fitter (P8777) included. It attaches to P8516 Alpha track transformer (Order separately)
- Attachment to P8780 quick connect monopoint
Attach cord to P8777 fitter and twist into position on the monopoint
- Attachment to P8794 designer monopoint
Directly wire cord into canopy
- Lamp has a GY6.35 bi-pin base

Labeling

- UL-CUL listed