


A decorative graphic in the top right corner of the page, consisting of numerous circles of varying sizes. Some circles are solid white, some are solid grey, and some are white with a grey outline. They are arranged in a vertical, slightly curved cluster, resembling bubbles or a stylized plume of smoke.

oxygen



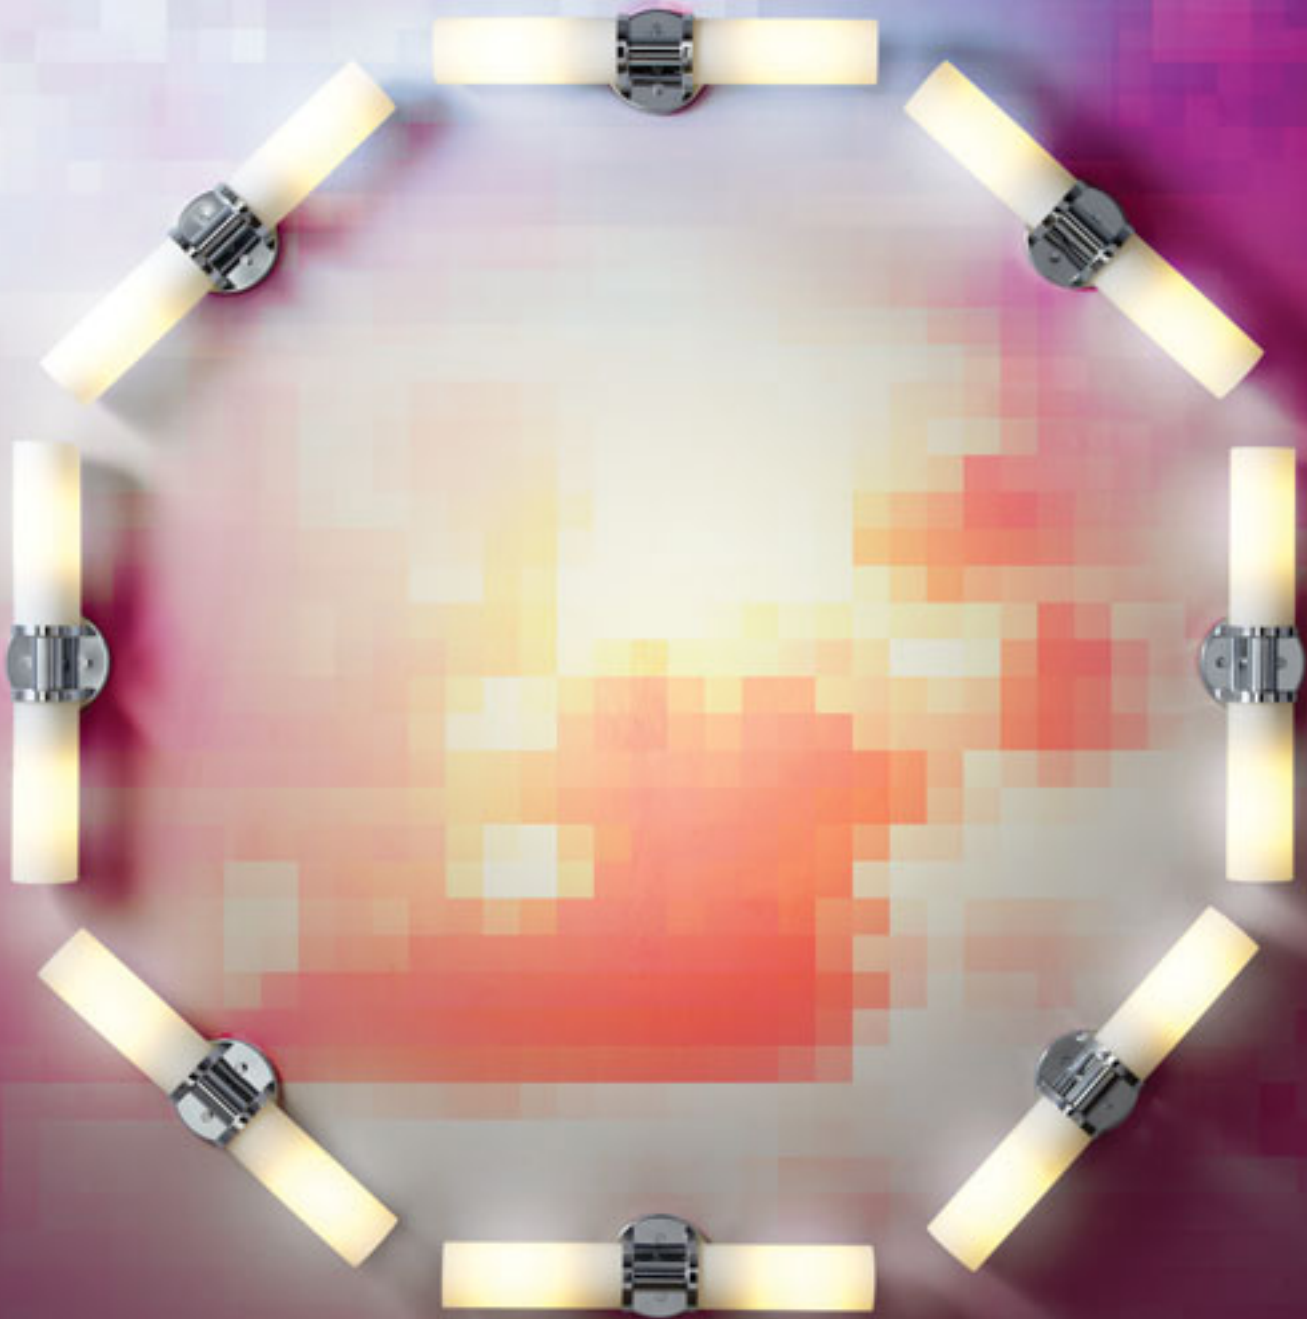

oxygen  
2013 | 2014









oxygen



WALL MOUNTS



CEILING MOUNTS

130

PENDANTS

154

OUTDOOR

174

ACCESSORIES & OPTIONS

essential elements

LIGHTING CATALOG 2013/2014

# INSTRUCTIONS

FOR SPECIFIERS



## THE PRODUCT DIAGRAM

indicates how the measurements of the fixture are determined and contains an approximate "human-scale" drawing of the fixture.

## THE SPEC CHART

for each fixture indicates which diffusers are available with each finish as well as lamping information and dimensions. If there are options available they will be indicated along with a sample product number to aid in specifying the options. Specs may be highlighted to help distinguish differences between similar looking products.

## GENERAL SPECIFICATIONS

such as housing, trim, diffuser thicknesses and how to obtain additional information from Oxygen.

## SYMBOLS



new product



UL listed for damp locations



UL listed for wet locations



ETL listed for damp locations



ADA compliant



integral battery backup ballast option



product ships within 24 hours




UL listed



ETL listed



Energy Star compliant

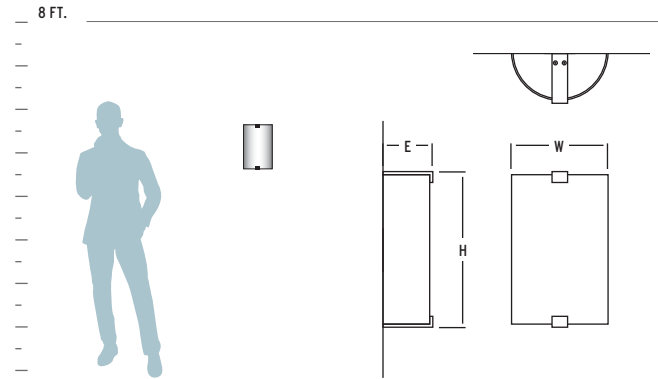

Review the diagram below to format your original Oxygen product number.

**2-5153-XXX**  
DIFFUSER FINISH

### 2-5153-XXX SIREN / FLUORESCENT

DIFFUSER	<b>1</b> White Opal Glass, <b>2</b> Matte White Acrylic, <b>3</b> Tobacco Acrylic, <b>4</b> Faux Onyx Acrylic, <b>6</b> Silver Cloth Acrylic, <b>7</b> Wave Pattern Acrylic, <b>8</b> Leaf Acrylic White acrylic top and bottom lenses <b>See diffuser options on page 175</b>
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	7.75"(w) x 12.5"(h) x 4"(ext)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120V-277V)

#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Cast steel trim.
- Glass diffuser is 1/4" thick white opal duplex glass.
- Acrylic shades are 1/8" thick.
- U.L. and C.U.L. approved for damp locations.
- 3-5153-XXX is ETL certified and approved for damp locations.
- ADA compliant.
- Units mount to standard 4" octagonal junction box.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.







YOU NEED  
oxygen





# WALL MOUNTS















# WALL MOUNTS

visual index



VANITIES		Adelphi	62
		Apollo	64
		Balance	68
		Balance	70
		Fuse	72
		Horizon	74




SCONCES		Alpha	14
		Apollo	16
		Apollo	17
		Beacon	18
		Chameleon	20
		Chameleon	22
		Pathways	36
		Pebble	42
		Pebble	44
		Polaris	46
		Siren	48
		Songbird	52

ADA		Adelphi	62
		Alpha	14
		Apollo	17
		Apollo	16
		Apollo	64
		Beacon	18
		Epoch	32
		Fuse	72
		Mantra	34
		Pathways	36
		Pebble	78
		Pebble	80
		Taza	54
		Union	58
		Zenith	84
		Zephyr	60



					
Horizon 76	Pebble 78	Pebble 80	Skyline 82	Zenith 84	Zenith 86




## VANITIES

					
Cinderella 24	Corneta 26	Dione 28	Echelon 30	Epoch 32	Mantra 34

			
Taza 54	Trinity 56	Union 58	Zephyr 60

## SCONCES

					
Chameleon 20	Chameleon 22	Cinderella 24	Corneta 26	Dione 28	Echelon 30



					
Pebble 42	Pebble 44	Polaris 46	Siren 48	Songbird 52	Skyline 82


## ADA



# WALL MOUNTS


visual index

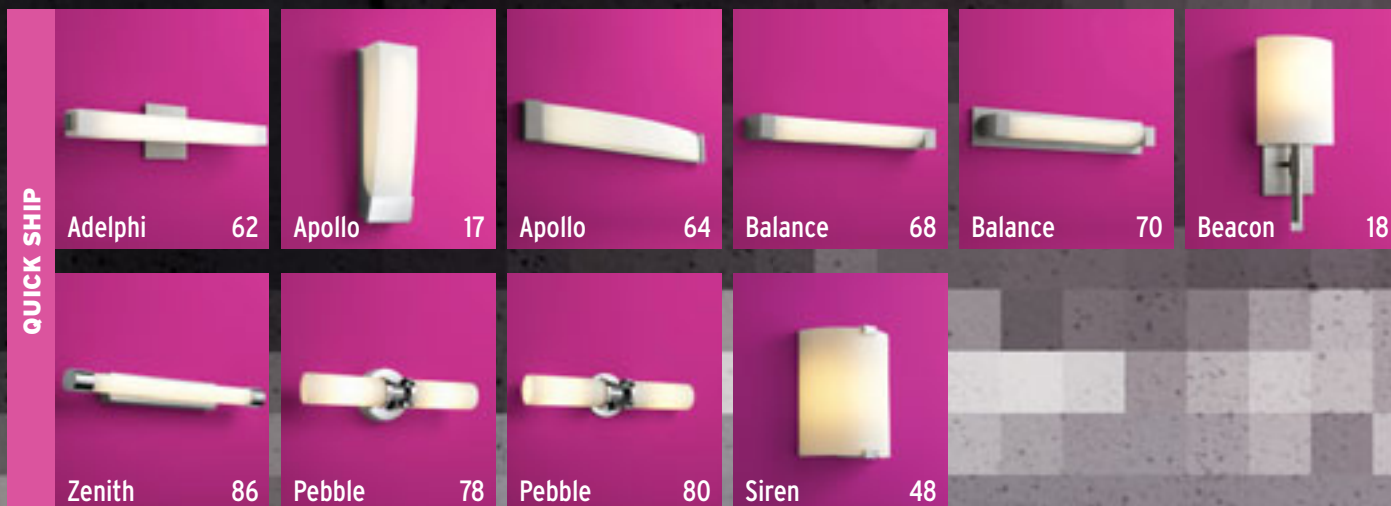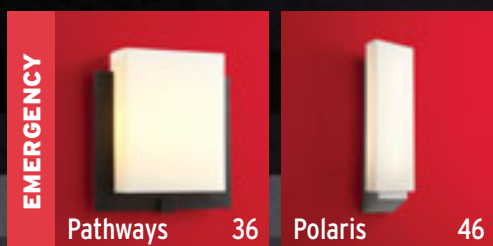

						QUICK SHIP
Chameleon 20	Chameleon 22	Dione 28	Pathways 36	Songbird 52	Zenith 84	





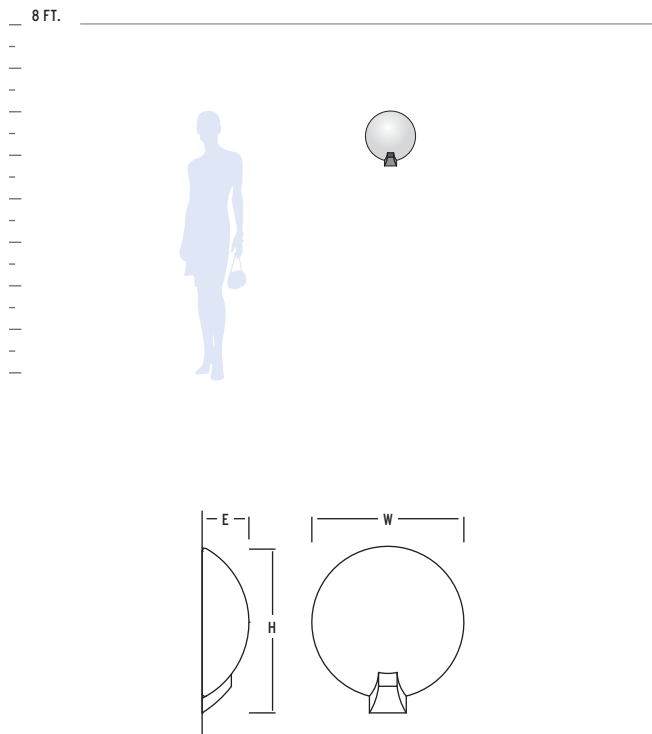

Review available options to format  
your Oxygen part number.

**2-5166-XXX**  
DIFFUSER FINISH

## 2-5166-XXX ALPHA / FLUORESCENT

DIFFUSER	2 Matte White Acrylic
FINISH	24 Satin Nickel
LAMPING	1 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	13"(w) x 14.25"(h) x 4"(ext)

### GENERAL SPECIFICATIONS:


- Molded steel housing.
- Diffuser is 1/8" thick matte white acrylic.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Fluorescent ballast is electronic, HPF, instant start, 120V.
- Installs on 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



ALPHA<sup>sconce</sup>

WALL MOUNTS

ADA

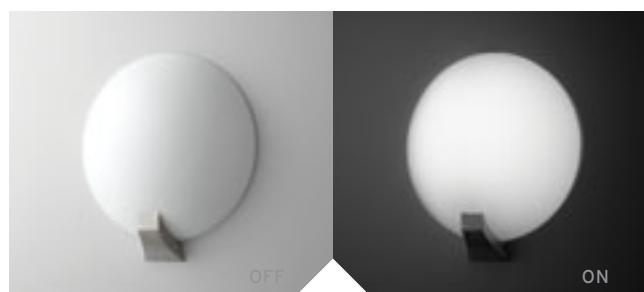


# APOLLO

sconce


2-6133-14

2-6133-24

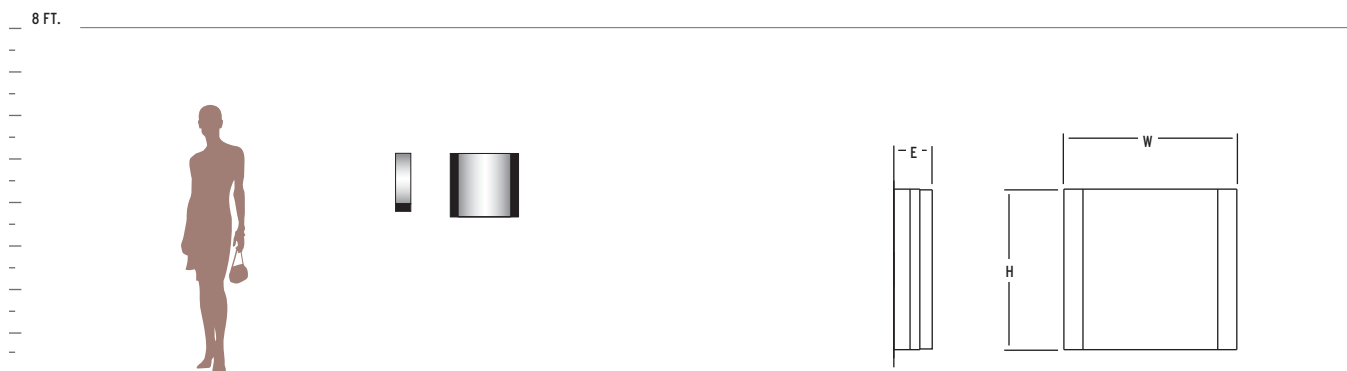

## 2-6133-XX APOLLO / FLUORESCENT



DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	3 x 24W twin 4-pin fluorescent (2G11)
DIMENSIONS	16.25"(w) x 17.5"(h) x 4"(ext)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120-277V)
OPTIONS	Approved for ceiling and wall mount

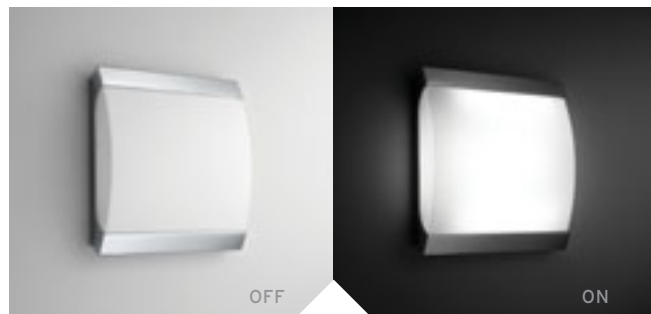



2-5107-24

2-5107-14

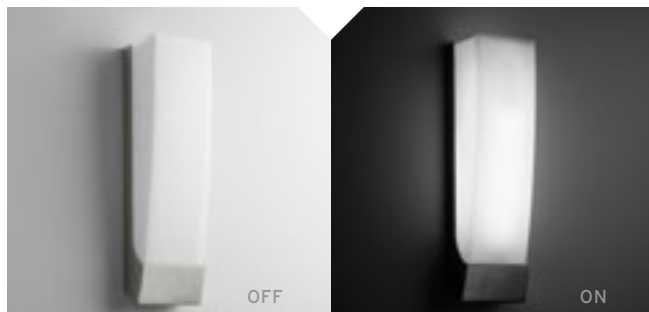

Review available options to format  
your Oxygen part number.

**2-5107-XX**  
FINISH

### 2-5107-XX APOLLO / FLUORESCENT

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 24W twin 4-pin fluorescent (2G11)
DIMENSIONS	4.5"(w) x 16"(h) x 3.75"(ext)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120-277V)

### 2-5175-XX APOLLO / FLUORESCENT

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 24W twin 4-pin fluorescent (2G11) 2700K (lamp included)
DIMENSIONS	4.5"(w) x 16"(h) x 3.75"(ext)
BALLAST	Electronic, HPF, Rapid Start, 120V

### 3-5107-XX APOLLO / LED

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 11W 3000k LED (array included)
DIMENSIONS	4.5"(w) x 16"(h) x 3.75"(ext)
DRIVER	120V

#### GENERAL SPECIFICATIONS:

- Cold-rolled steel housing.
- Perforated metal top lens on 2-5107-XX, 2-5175-XX, and 3-5107-XX.
- Diffuser is 1/8" thick matte white acrylic.
- ADA Compliant.
- 3-5107-XX is ETL Certified and approved for damp locations.
- U.L. and C.U.L. approved for damp locations.
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamps.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



APOLLO  
sconce

WALL MOUNTS

ADA

LED




# BEACON

sconce



2-597-224

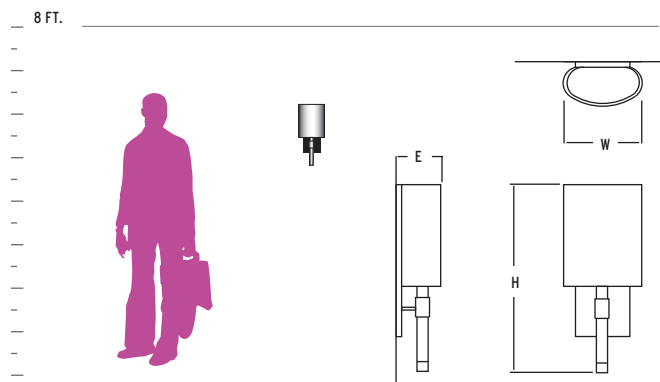

Review available options to format  
your Oxygen part number.


**2-597-XXX**  
DIFFUSER FINISH

### 2-597-XXX BEACON / FLUORESCENT

DIFFUSER	<b>1</b> White Cotton, <b>2</b> Matte White Acrylic, <b>5</b> White Grass
FINISH	<b>24</b> Satin Nickel, <b>95</b> Old World
LAMPING	1 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	7"(w) x 17"(h) x 4"(ext)

#### GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim.
- Clear, polished resin accent.
- Fabric shade is white cotton.
- Acrylic shade is 1/8", matte white finish.
- White grass shade is natural bamboo fibers.
- White acrylic top and bottom lenses.
- U.L. and C.U.L. approved for damp locations.
- ADA Compliant
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamps.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

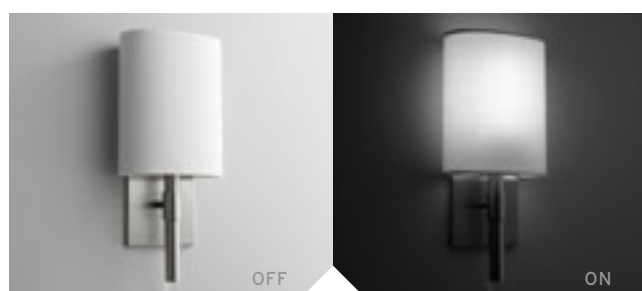

BEACON  
sconce


WALL MOUNTS

ADA

# CHAMELEON sconce





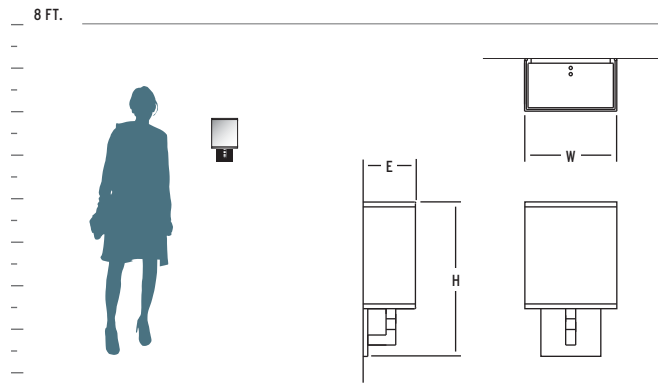

Review available options to format  
your Oxygen part number.

**2-5161-XXX**  
DIFFUSER FINISH

**2-5161-XXX** CHAMELEON / INCANDESCENT


DIFFUSER	1 White Cotton
FINISH	14 polished Chrome, 24 Satin Nickel
LAMPING	1 x 60W A19 incandescent (medium base)
DIMENSIONS	8"(w) x 11.75"(h) x 4"(ext)

**2-5145-XXX** CHAMELEON / FLUORESCENT

DIFFUSER	1 White Cotton, 2 Matte White Acrylic, 5 White Grass
FINISH	14 polished Chrome, 24 Satin Nickel
LAMPING	1 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	8"(w) x 11.75"(h) x 4"(ext)

**GENERAL SPECIFICATIONS:**

- Cold rolled steel housing.
- Frost resin accents.
- Acrylic lenses and shades are 1/8" thick matte white.
- Fabric shade is white cotton.
- White acrylic top and bottom lenses.
- White grass shade is natural bamboo fibers.
- U.L. and C.U.L. approved for damp locations.
- ADA Compliant.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Incandescent fixtures are 120V.
- All units mount to 4" octagonal junction box.
- Toolless access to lamps.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

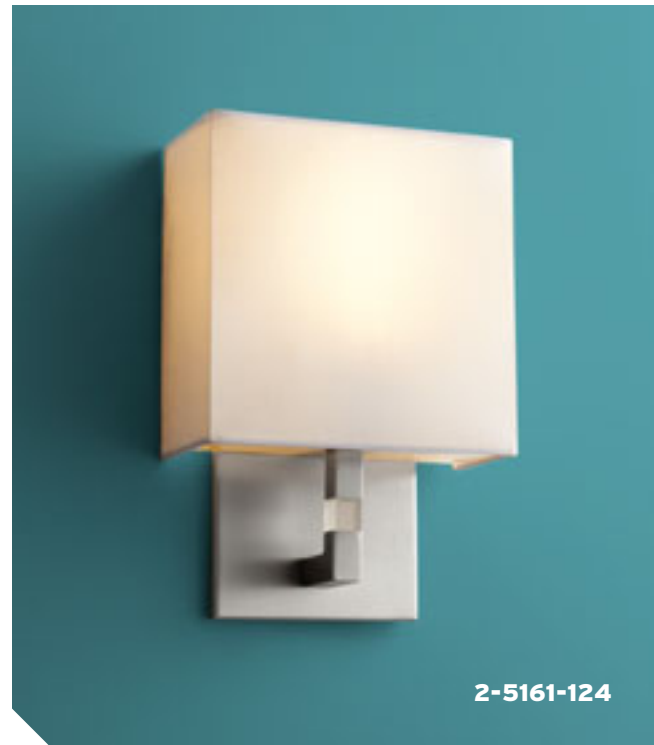

2-5161-124



2-5145-224



OFF

ON

CHAMELEON  
sconce


WALL MOUNTS

ADA

# CHAMELEON sconce



2-5146-524

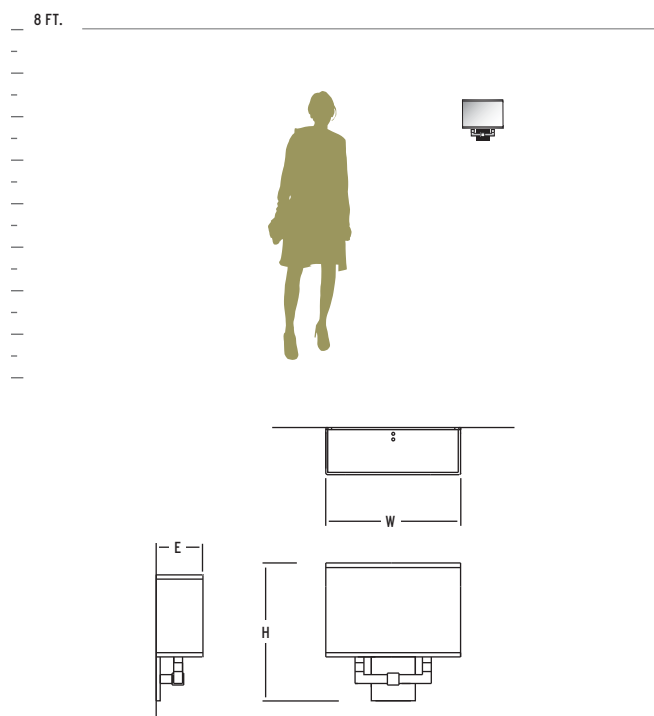

Review available options to format  
your Oxygen part number.

**2-5126-XXX**  
DIFFUSER FINISH

### 2-5126-XXX CHAMELEON / INCANDESCENT

DIFFUSER	1 White Cotton
FINISH	14 polished Chrome, 24 Satin Nickel
LAMPING	2 x 60W A19 incandescent (medium base)
DIMENSIONS	11.75"(w) x 11.5"(h) x 4"(ext)

### 2-5146-XXX CHAMELEON / FLUORESCENT

DIFFUSER	1 White Cotton, 2 Matte White Acrylic, 5 White Grass
FINISH	14 polished Chrome, 24 Satin Nickel
LAMPING	2 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	11.75"(w) x 11.5"(h) x 4"(ext)

### 3-5126-XXX CHAMELEON / LED

DIFFUSER	2 Matte White Acrylic
FINISH	14 polished Chrome, 24 Satin Nickel
LAMPING	1 x 11W 3000k LED (array included)
DIMENSIONS	11.75"(w) x 11.5"(h) x 4"(ext)
DRIVER	120V



#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Frost resin accents.
- Acrylic lenses and shades are 1/8" thick matte white.
- Fabric shade is white cotton.
- White grass shade is natural bamboo fibers.
- White acrylic top and bottom lenses.
- U.L. and C.U.L. approved for damp locations.
- ADA Compliant.
- 3-5126-XX is ETL Certified and approved for damp locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Incandescent fixtures are 120V.
- All units mount to 4" octagonal junction box.
- Toolless access to lamps.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



CHAMELEON

sconce

WALL MOUNTS

ADA


LED



CINDERASconce



2-5157-114

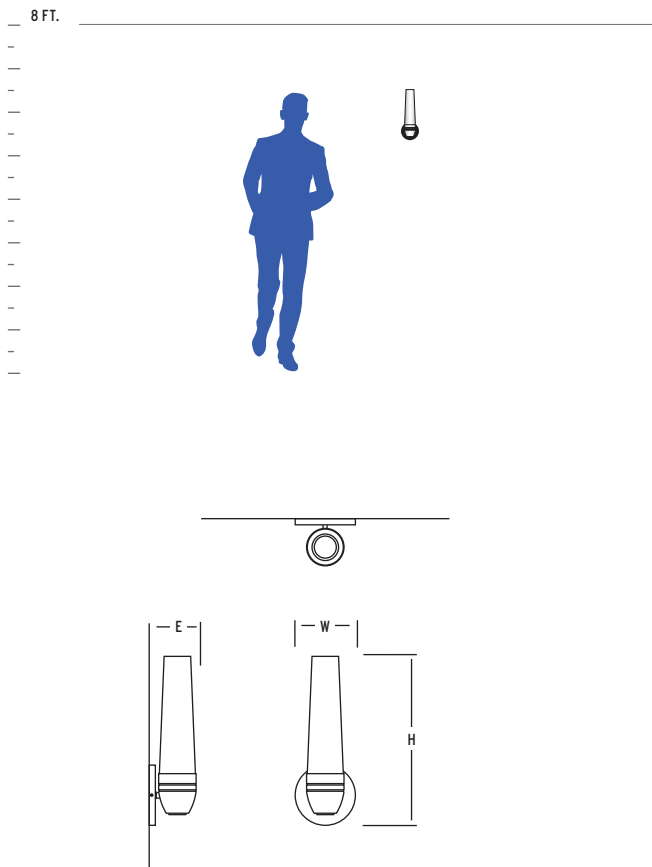

Review available options to format your Oxygen part number.

**2-5157-XXX**  
DIFFUSER FINISH

### 2-5157-XXX CINDER / INCANDESCENT


DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome
LAMPING	1 x 60W B incandescent (medium base)
DIMENSIONS	5"(w) x 14"(h) x 4"(ext)

### 2-5158-XXX CINDER / FLUORESCENT

DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome
LAMPING	1 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	5"(w) x 14"(h) x 4"(ext)

#### GENERAL SPECIFICATIONS:

- Spun steel housing.
- Open top.
- Diffuser threads onto housing with integral threaded fitting.
- Diffuser is 3/16" thick white opal duplex glass.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Incandescent fixture is 120V.
- GU24 fluorescent ballast is electronic, NPF, rapid start, 120V.
- Unit mounts to standard 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

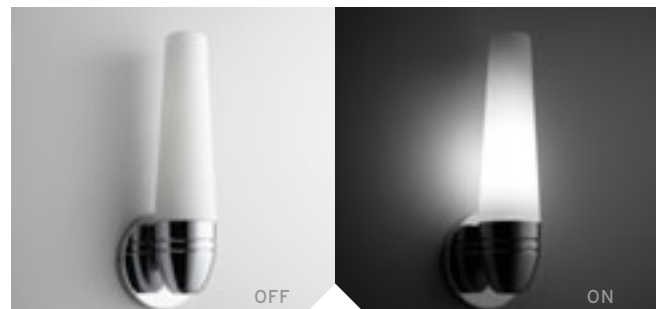

CINDER  
sconce

WALL MOUNTS

ADA

# CORNETA


sconce







2-5159-124

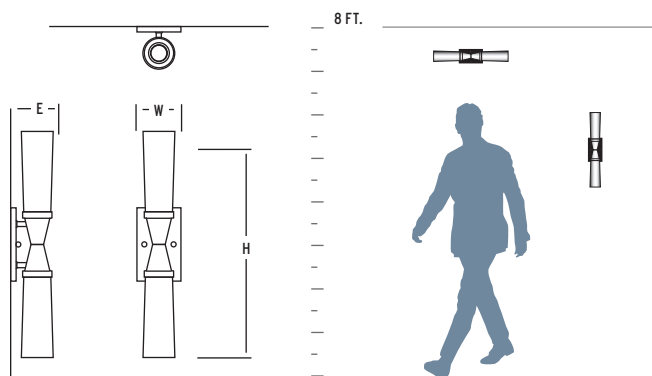

Review available options to format your Oxygen part number.

**2-5159-XXX**  
DIFFUSER FINISH

### 2-5159-XXX CORNETA / INCANDESCENT

DIFFUSER	1 White Opal Glass
FINISH	24 Satin Nickel
LAMPING	2 x 60W B incandescent (medium base)
DIMENSIONS	4"(w) x 21.25"(h) x 4"(ext)

### 2-5160-XXX CORNETA / FLUORESCENT

DIFFUSER	1 White Opal Glass
FINISH	24 Satin Nickel
LAMPING	2 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	4"(w) x 21.25"(h) x 4"(ext)

#### GENERAL SPECIFICATIONS:


- Spun steel housing.
- Cold rolled steel backplate.
- Diffuser threads onto housing with integral threaded fitting.
- Diffuser is 1/8" white opal duplex glass.
- Open top and bottom.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Incandescent fixture is 120V.
- GU24 fluorescent ballast is electronic, NPF, rapid start, 120V.
- Mounts to 4" octagonal junction box.
- Toolless access to lamps.
- Approved for vertical or horizontal mounting.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.




CORNETA  
sconce

WALL MOUNTS

ADA

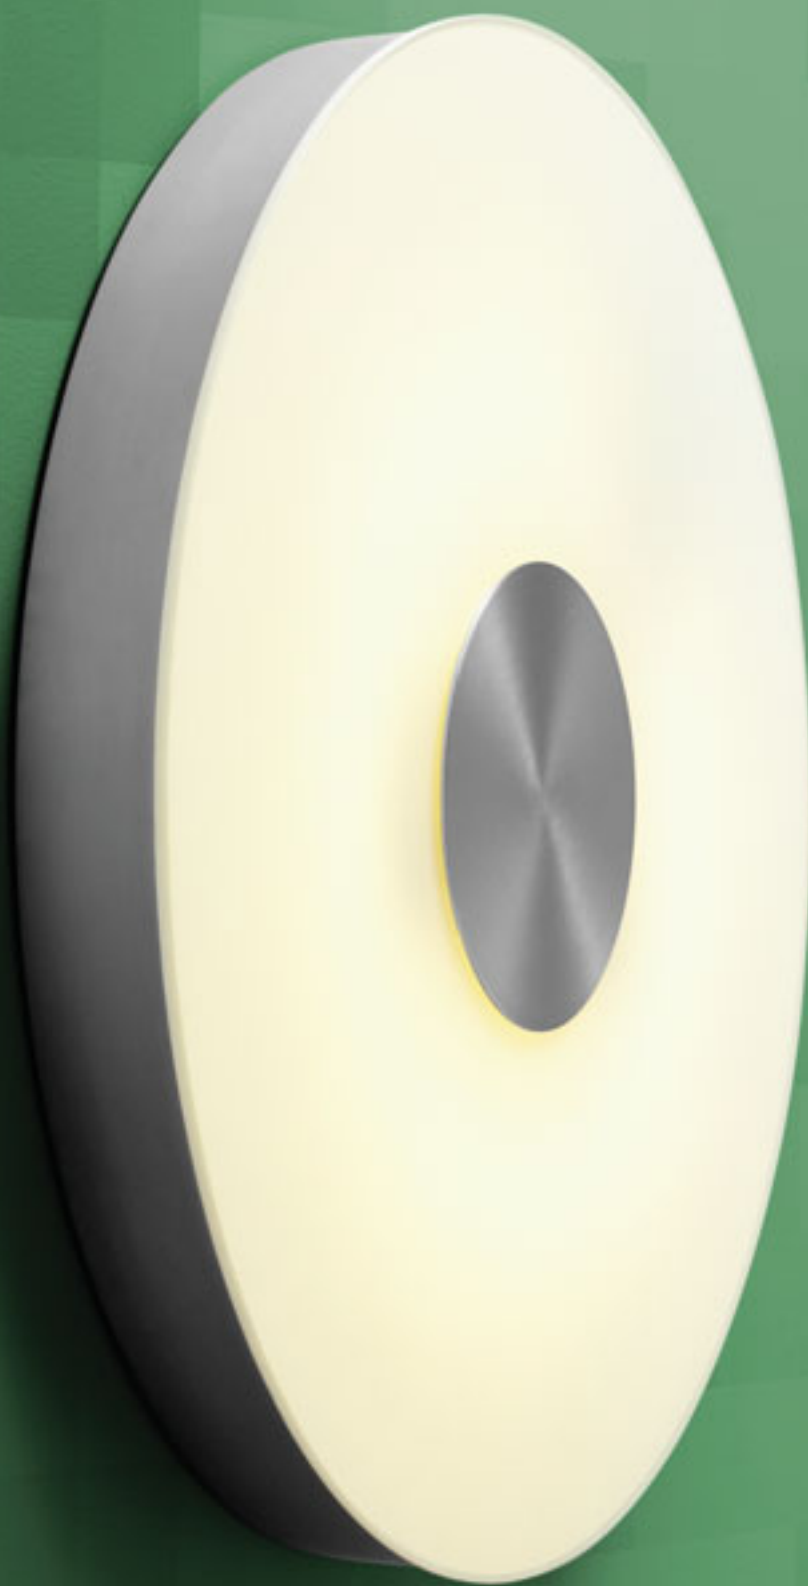

2-6165-124

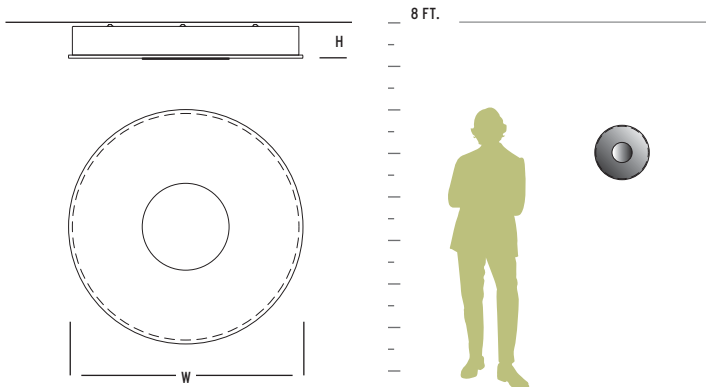

Review available options to format  
your Oxygen part number.

**2-6164-XXX**  
DIFFUSER FINISH

**2-6164-XXX** DIONE / FLUORESCENT / SMALL

DIFFUSER	1 Frosted Glass
FINISH	24 Satin Nickel
LAMPING	1 x 22W T5 circline fluorescent (2GX13)
DIMENSIONS	15"(w) x 2.25"(ext)

**2-6165-XXX** DIONE / FLUORESCENT / LARGE


DIFFUSER	1 Frosted Glass
FINISH	24 Satin Nickel
LAMPING	1 x 55W T5 circline fluorescent (2GX13)
DIMENSIONS	21"(w) x 2.25"(ext)

**GENERAL SPECIFICATIONS:**

- Spun steel housing.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballasts are electronic HPF, programmed start, universal voltage (120V to 277V).
- Units mount to 4" octagonal junction box.
- Toolless access to lamp.
- ADA compliant.
- Approved for wall or ceiling mount applications.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.




**2-6164-124**

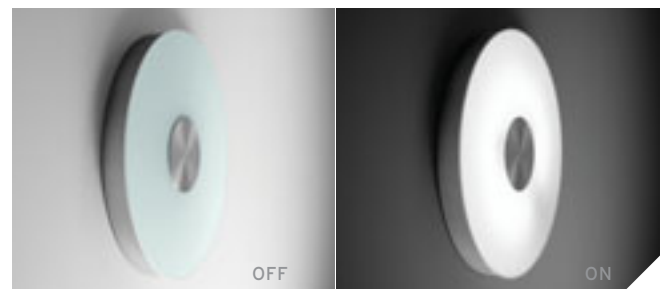



# ECHELON sconce

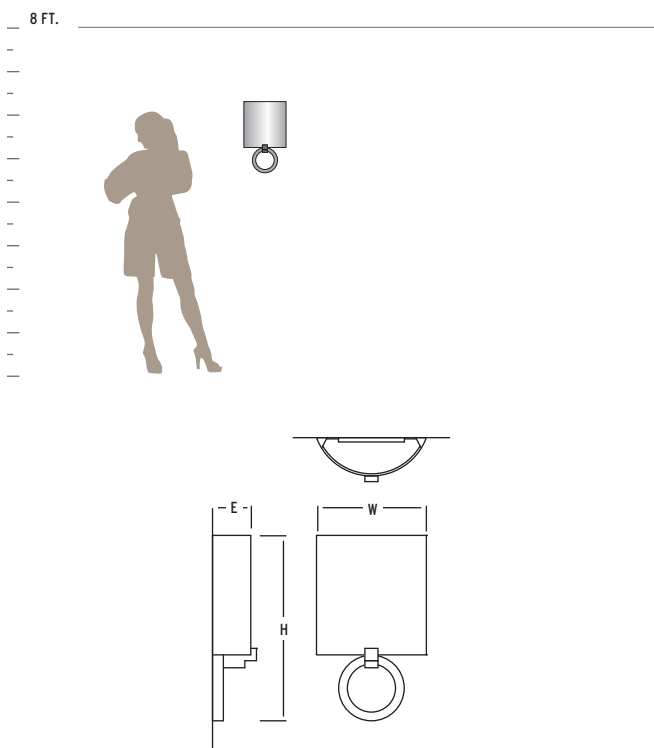

Review available options to format your Oxygen part number.


**2-5165-XXX**  
DIFFUSER FINISH

**2-5165-XXX** ECHELON / FLUORESCENT

DIFFUSER	2 Matte White Acrylic
FINISH	24 Satin Ncikel
LAMPING	1 x 18W Twin 4-pin fluorescent (2G11)
DIMENSIONS	10"(w) x 17"(h) x 4"(ext)

**GENERAL SPECIFICATIONS:**

- Molded steel housing.
- Diffuser is 1/8" thick matte white acrylic.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Fluorescent ballast is electronic, HPF, instant start, 120V.
- White acrylic top and bottom lenses.
- Installs on 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

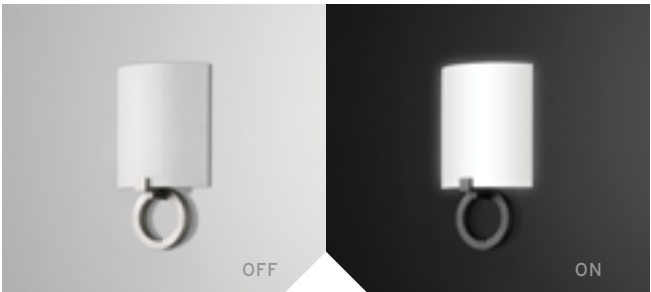



# ECHELON

sconce


24

WALL MOUNTS

ADA

2-5165-224

# EPOCH sconce

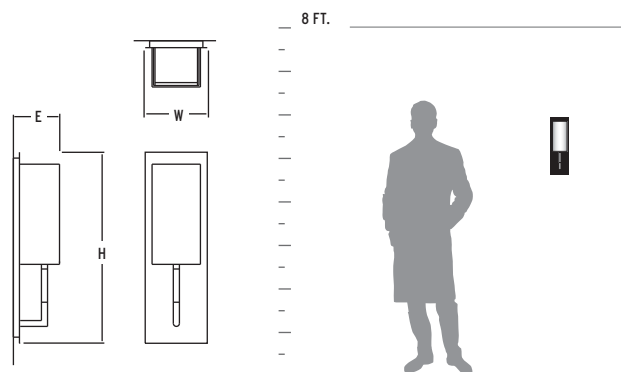

Review available options to format  
your Oxygen part number.


**2-5154-XXX**  
DIFFUSER FINISH

## 2-5154-XXX EPOCH / FLUORESCENT

DIFFUSER	<b>1</b> White Cotton, <b>2</b> Matte White Acrylic, <b>5</b> White Grass
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	5.25"(w) x 15.75"(h) x 3.75"(ext)

### GENERAL SPECIFICATIONS:

- Cold rolled steel backplate.
- Steel tubing with frost resin accent.
- Fabric shade is white cotton.
- Acrylic shade is 1/8", matte white finish.
- White grass shade is natural bamboo fibers.
- White acrylic top and bottom lenses.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Mounts to 4" octagonal junction box.
- Toolless access to lamps.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

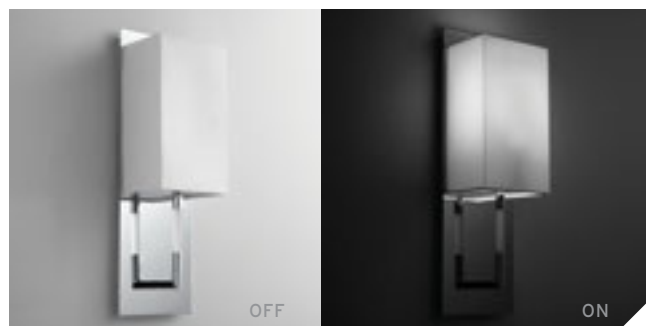





EP0CH

sconce

WALL MOUNTS

ADA

2-5154-124




2-5127-14



2-5181-24



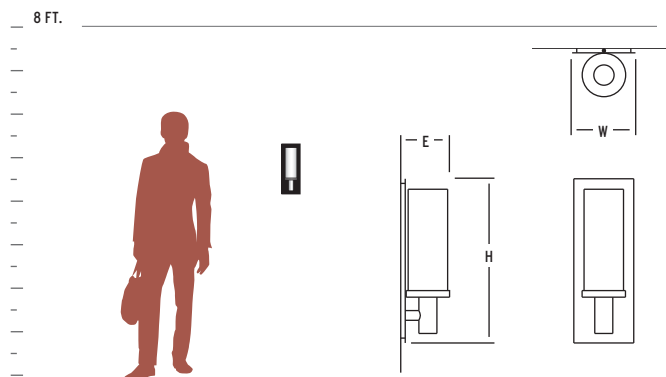

Review available options to format  
your Oxygen part number.

**2-5127-XXX**  
OPTION FINISH

**2-5127-XXX** MANTRA / FLUORESCENT

DIFFUSER	White Opal Glass
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	5"(w) x 13.5"(h) x 4"(ext)
OPTIONS	<b>3</b> Perforated Sleeve, <b>9</b> End Cap

**2-5181-XX** MANTRA / FLUORESCENT

DIFFUSER	White Opal Glass
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 18W quad 4-pin fluorescent (G24q-2) (lamp included)
DIMENSIONS	5"(w) x 13.5"(h) x 4"(ext)

**GENERAL SPECIFICATIONS:**

- Cold rolled steel housing.
- Diffuser screws onto housing with integral threaded fitting.
- Glass diffusers are 1/4" white opal duplex glass.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- GU24 fluorescent ballast is electronic, NPF, rapid start, 120V.
- Open top.
- Optional perforated sleeve is natural steel finish.
- Unit mounts to 4" octagonal junction box.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



MANTRA  
sconce

WALL MOUNTS

ADA





# PATHWAYS

sconce





# PATHWAYS

SCONCE



2-5113-624



Review available options to format  
your Oxygen part number.

**2-5113-XXX**  
DIFFUSER FINISH

### 2-5113-XXX PATHWAYS / FLUORESCENT

DIFFUSER	<b>2</b> Matte White Acrylic, <b>3</b> Tobacco Acrylic, <b>4</b> Faux Onyx Acrylic, <b>6</b> Silver Cloth Acrylic, <b>7</b> Wave Pattern Acrylic, <b>8</b> Leaf Acrylic <b>See diffuser options on page 175</b>
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel, <b>95</b> Old World
LAMPING	2 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	13.75"(w) x 15"(h) x 3.75"(ext)
BALLAST	Electronic, NPF, programmed start, universal voltage (120V to 277V)

### 2-5117-XXX PATHWAYS / FLUORESCENT


DIFFUSER	<b>2</b> Matte White Acrylic, <b>3</b> Tobacco Acrylic, <b>4</b> Faux Onyx Acrylic, <b>6</b> Silver Cloth Acrylic, <b>7</b> Wave Pattern Acrylic, <b>8</b> Leaf Acrylic <b>See diffuser options on page 175</b>
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel, <b>95</b> Old World
LAMPING	2 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	13.75"(w) x 15"(h) x 3.75"(ext)
BALLAST	Electronic, NPF, instant start, universal voltage (120V to 277V)

### 2-5118-XXX-EM PATHWAYS / FLUORESCENT

DIFFUSER	<b>2</b> Matte White Acrylic, <b>3</b> Tobacco Acrylic, <b>4</b> Faux Onyx Acrylic, <b>6</b> Silver Cloth Acrylic, <b>7</b> Wave Pattern Acrylic, <b>8</b> Leaf Acrylic <b>See diffuser options on page 175</b>
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel, <b>95</b> Old World
LAMPING	2 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	13.75"(w) x 15"(h) x 3.75"(ext)
BALLAST	Electronic, NPF, instant start, universal voltage (120V to 277V)
OPTIONS	<b>EM</b> Integral emergency ballast


### 3-5113-XXX PATHWAYS / LED

DIFFUSER	<b>2</b> Matte White Acrylic, <b>3</b> Tobacco Acrylic, <b>4</b> Faux Onyx Acrylic, <b>6</b> Silver Cloth Acrylic, <b>7</b> Wave Pattern Acrylic, <b>8</b> Leaf Acrylic <b>See diffuser options on page 175</b>
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel, <b>95</b> Old World
LAMPING	1 x 11W 3000k LED (array included)
DIMENSIONS	13.75"(w) x 15"(h) x 3.75"(ext)
DRIVER	120V

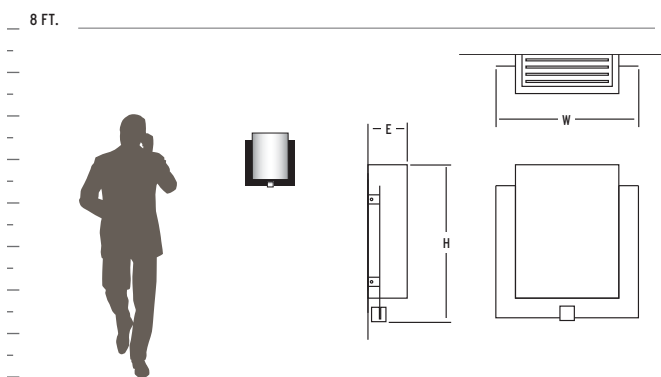

#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing and trim.
- Acrylic diffusers are 1/8" thick, finish as specified.
- U.L. and C.U.L. approved for damp locations.
- 3-5113-XXX is ETL certified and approved for damp locations.
- ADA Compliant.
- Unit mounts to 4" octagonal junction box.
- Optional Emergency ballast is Bodine B94G series, up to 325 lumen output in emergency mode.
- Toolless access to lamps.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

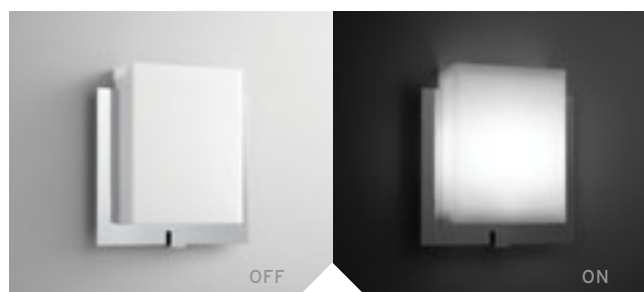



PEBBLE sconce






# PEBBLE

sconce



2-5156-124

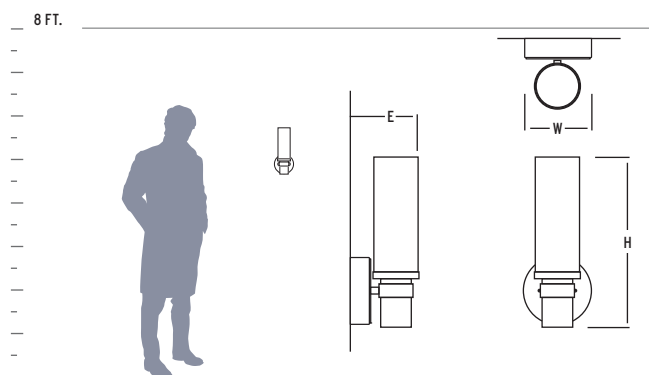

PEBBLE  
sconce

WALL MOUNTS

Review available options to format  
your Oxygen part number.


**2-5156-XXX**  
OPTION FINISH

### 2-5156-XXX PEBBLE / FLUORESCENT

DIFFUSER	<b>1</b> White Opal Glass
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	6"(w) x 12.75"(h) x 5.5"(ext)
OPTIONS	<b>9</b> End Cap

#### GENERAL SPECIFICATIONS:

- Cast steel fittings.
- Diffuser screws onto housing with integral threaded fitting.
- Glass diffusers are 1/4" thick white opal duplex glass.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballasts are electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

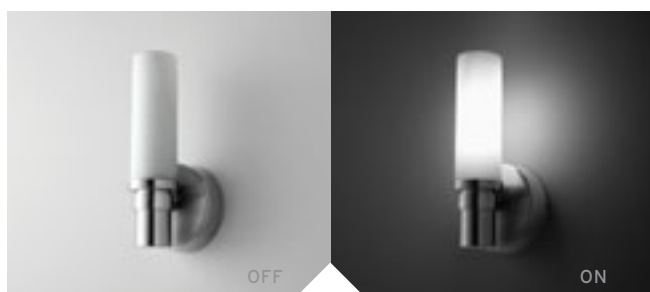



# PEBBLE

sconce




**2-5124-314**  
shown with optional perforated sleeve



**2-572-124**



**2-572-195**

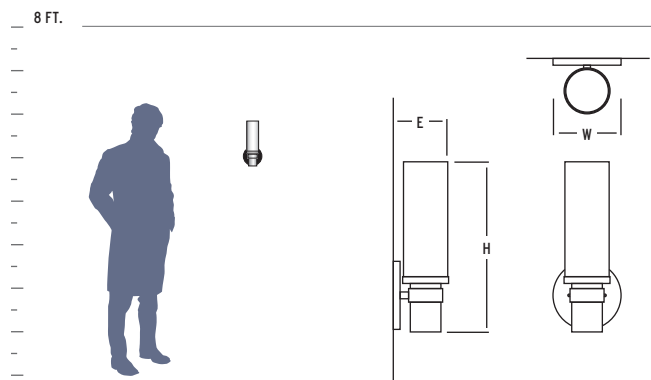

Review available options to format  
your Oxygen part number.

**2-573-XXX**  
OPTION FINISH

### 2-573-XXX PEBBLE / INCANDESCENT

DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome, 24 Satin Nickel, 95 Old World
LAMPING	1 x 60W T10 incandescent (medium base)
DIMENSIONS	4.25"(w) x 12.5"(h) x 4"(ext)
OPTIONS	9 End Cap

### 2-572-XXX PEBBLE / FLUORESCENT

DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome, 24 Satin Nickel, 95 Old World
LAMPING	1 x 13W twin 2-pin fluorescent (GX23)
DIMENSIONS	4.25"(w) x 12.5"(h) x 4"(ext)
BALLAST	Magnetic, NPF, 120V
OPTIONS	9 End Cap

### 2-5124-XXX PEBBLE / FLUORESCENT

DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome, 24 Satin Nickel, 95 Old World
LAMPING	1 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	5.25"(w) x 12.5"(h) x 4"(ext)
BALLAST	Electronic, NPF, Rapid Start, 120V
OPTIONS	3 Perforated Sleeve, 9 End Cap

### 2-5173-XXX PEBBLE / FLUORESCENT


DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome, 24 Satin Nickel,
LAMPING	1 x 18W quad 4-pin fluorescent (G24q-2) (lamp Included)
DIMENSIONS	5.25"(w) x 12.5"(h) x 4"(ext)
BALLAST	Electronic, NPF, Rapid Start, 120V



**2-5124-914**  
shown with optional end cap

#### GENERAL SPECIFICATIONS:

- Cast and machined steel fittings.
- Diffuser screws onto housing with integral threaded fitting.
- Glass diffusers are 1/4" thick white opal duplex glass. Open top.
- Optional perforated sleeve is natural steel finish.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Units mounts to 4" octagonal junction box.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

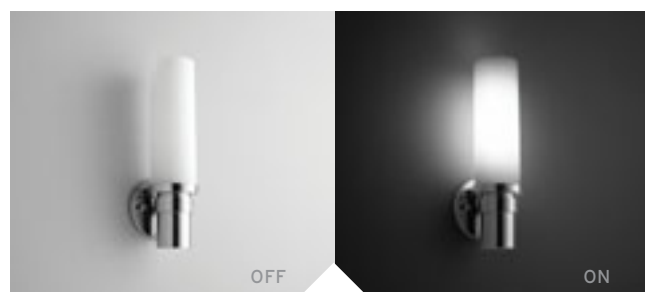

PEBBLE  
scone

WALL MOUNTS



ADA



# POLARIS

sconce



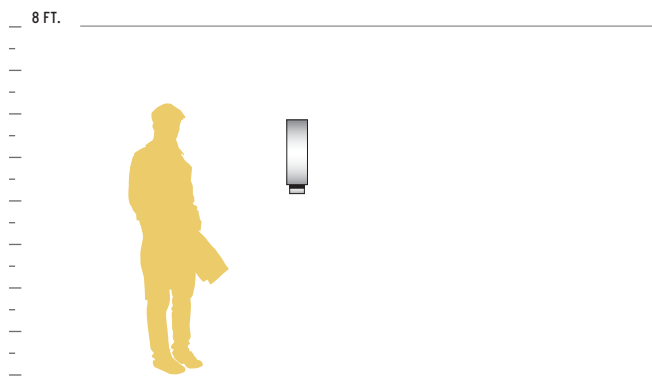

Review available options to format  
your Oxygen part number.

**2-5112-XX**  
FINISH

For integral emergency ballast option,  
add -EM to the end of your part number.


**2-5112-XX-EM**  
FINISH

### 2-5112-XX POLARIS / FLUORESCENT

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 39W Twin 4-pin fluorescent (2G11)
DIMENSIONS	5.75"(w) x 20.5"(h) x 4"(ext)
OPTIONS	<b>EM</b> Integral emergency ballast

#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Acrylic diffusers are 1/8" thick matte white with closed top and bottom.
- U.L. and C.U.L. approved for damp locations.
- ADA Compliant.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120 to 277V).
- Unit mounts to 4" octagonal junction box.
- Optional integral emergency ballast is Bodine B94G series, 600 Lumen output in emergency mode.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

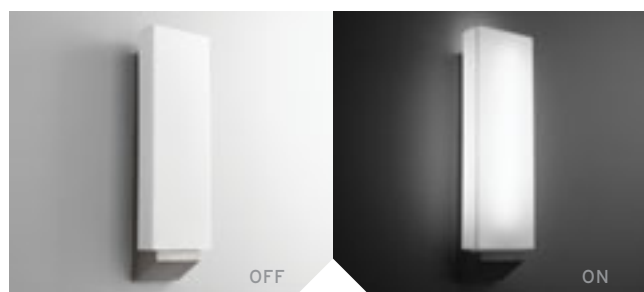

**POLARIS**  
sconce

WALL MOUNTS

ADA

EM



**SIREN** sconce





SIREN sconce



2-5153-424

Review available options to format  
your Oxygen part number.

**2-575-XXX**  
DIFFUSER FINISH

### 2-575-XXX SIREN / INCANDESCENT

DIFFUSER	<b>1</b> White Opal Glass Perforated steel top and bottom lenses
FINISH	<b>24</b> Satin Nickel
LAMPING	2 x 60W B incandescent (candelabra base)
DIMENSIONS	7.75"(w) x 12.5"(h) x 4"(ext)

### 2-5179-XXX SIREN / FLUORESCENT


DIFFUSER	<b>1</b> White Opal Glass White acrylic top and bottom lenses
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 26W quad 4-pin fluorescent (G24q-3) 2700k (lamp included)
DIMENSIONS	7.75"(w) x 12.5"(h) x 4"(ext)
BALLAST	Electronic, HPF, Rapid Start, 120V

### 2-5153-XXX SIREN / FLUORESCENT

DIFFUSER	<b>1</b> White Opal Glass, <b>2</b> Matte White Acrylic, <b>3</b> Tobacco Acrylic, <b>4</b> Faux Onyx Acrylic, <b>6</b> Silver Cloth Acrylic, <b>7</b> Wave Pattern Acrylic, <b>8</b> Leaf Acrylic White acrylic top and bottom lenses <b>See diffuser options on page 175</b>
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	7.75"(w) x 12.5"(h) x 4"(ext)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120V-277V)


### 3-5153-XXX SIREN / LED

DIFFUSER	<b>2</b> Matte White Acrylic, <b>3</b> Tobacco Acrylic, <b>4</b> Faux Onyx Acrylic, <b>6</b> Silver Cloth Acrylic, <b>7</b> Wave Pattern Acrylic, <b>8</b> Leaf Acrylic White acrylic top and bottom lenses <b>See diffuser options on page 175</b>
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 11W 3000k LED (array included)
DIMENSIONS	7.75"(w) x 12.5"(h) x 4"(ext)
DRIVER	120V

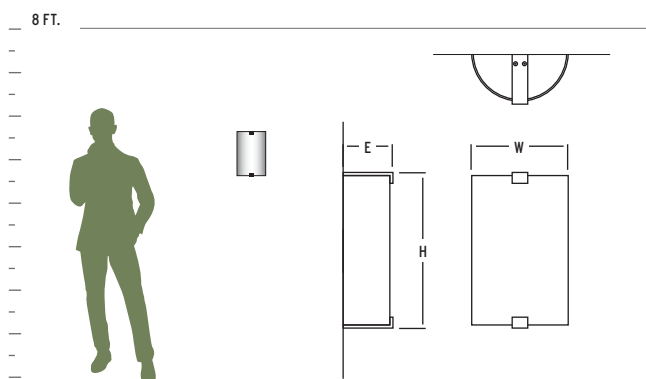

#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Cast steel trim.
- Glass diffuser is 1/4" thick white opal duplex glass.
- Acrylic shades are 1/8" thick.
- U.L. and C.U.L. approved for damp locations.
- 3-5153-XXX is ETL certified and approved for damp locations.
- ADA compliant.
- Units mount to standard 4" octagonal junction box.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

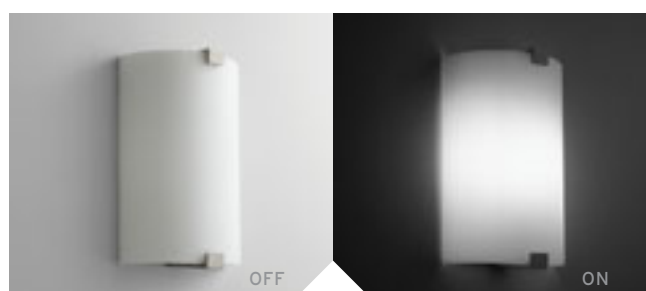

SIREN  
scone


WALL MOUNTS

ADA

LED





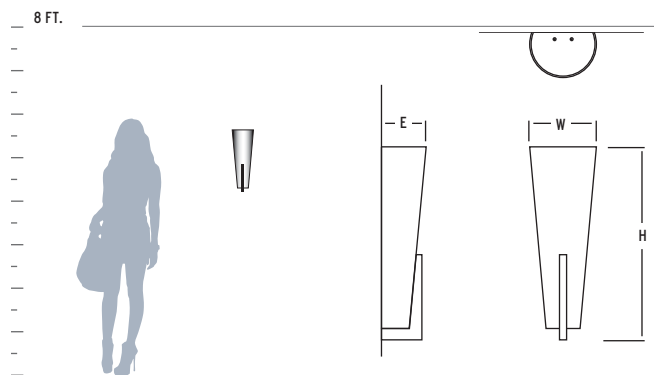

Review available options to format your Oxygen part number.

**2-579-XXX**  
DIFFUSER FINISH

### 2-580-XXX SONGBIRD / INCANDESCENT



DIFFUSER	1 White Opal Glass
FINISH	24 Satin Nickel
LAMPING	2 x 60W B incandescent (candelabra base)
DIMENSIONS	6"(w) x 17"(h) x 4"(ext)
OPTIONS	Perforated steel top and bottom lenses

### 2-579-XXX SONGBIRD / FLUORESCENT

DIFFUSER	1 White Opal Glass, 2 Matte White Acrylic, 3 Tobacco Acrylic, 4 Faux Onyx Acrylic, 6 Silver Cloth Acrylic, 7 Wave Pattern Acrylic, 8 Leaf Acrylic <b>See diffuser options on page 175</b>
FINISH	14 Polished Chrome, 24 Satin Nickel
LAMPING	1 x 24W twin 4-pin fluorescent (2G11)
DIMENSIONS	6"(w) x 17"(h) x 4"(ext)
OPTIONS	White acrylic top and bottom lenses

### 3-579-XXX SONGBIRD / LED

DIFFUSER	1 White Opal Glass,
FINISH	14 Polished Chrome, 24 Satin Nickel
LAMPING	1 x 11W 3000k LED (array included)
DIMENSIONS	6"(w) x 17"(h) x 4"(ext)
OPTIONS	White acrylic top and bottom lenses
DRIVER	120V

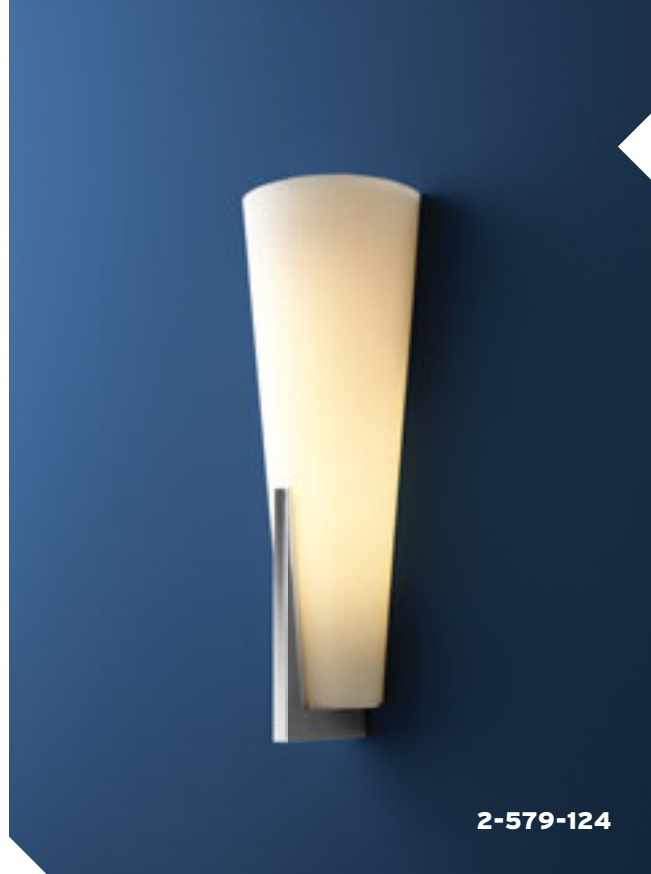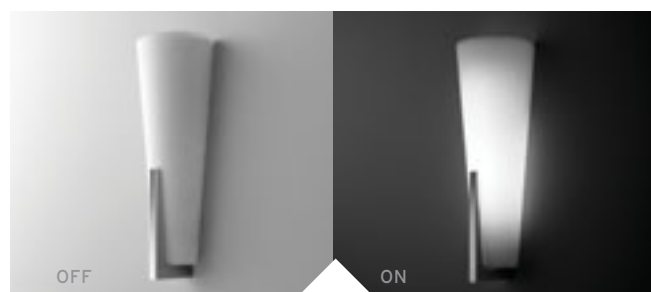

2-579-124

SONGBIRD  
sconce

WALL MOUNTS

ADA

LED

#### GENERAL SPECIFICATIONS:


- Cold rolled steel housing.
- Cast steel trim.
- Acrylic diffusers are 1/8" thick, finish as specified.
- Glass diffuser is 1/4" thick white opal duplex glass.
- U.L. and C.U.L. approved for damp locations.
- 3-579-XXX is ETL certified and approved for damp locations.
- ADA compliant.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- All units mount to vertical 2" X 3" or 4" octagonal junction box.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.





2-5898-14



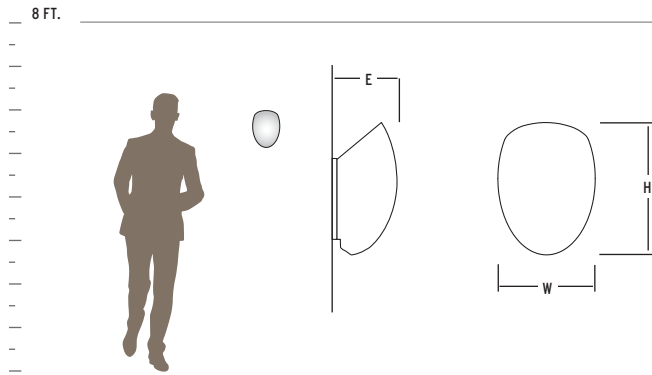

Review available options to format  
your Oxygen part number.

**2-5898-XX**  
FINISH

### 2-5898-XX TAZA / FLUORESCENT

DIFFUSER	White Opal Glass
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 13w Self-ballasted Spiral fluorescent (GU24) (lamp included)
DIMENSIONS	5.75"(w) x 8"(h) x 4"(ext)

#### GENERAL SPECIFICATIONS:

- Cold rolled steel backplate.
- Bent steel tubing frame.
- White opal glass diffuser is 1/8" thick.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Open top.
- Energy Star certified spiral GU24 lamp included - 2700k.
- Self-ballasted lamp is electronic, NPF, instant start, 120V.
- Unit mounts to 4" octagonal junction box.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



TAZA  
scone

WALL MOUNTS

ADA

ENERGY STAR




TRINITY sconce





2-5182-124

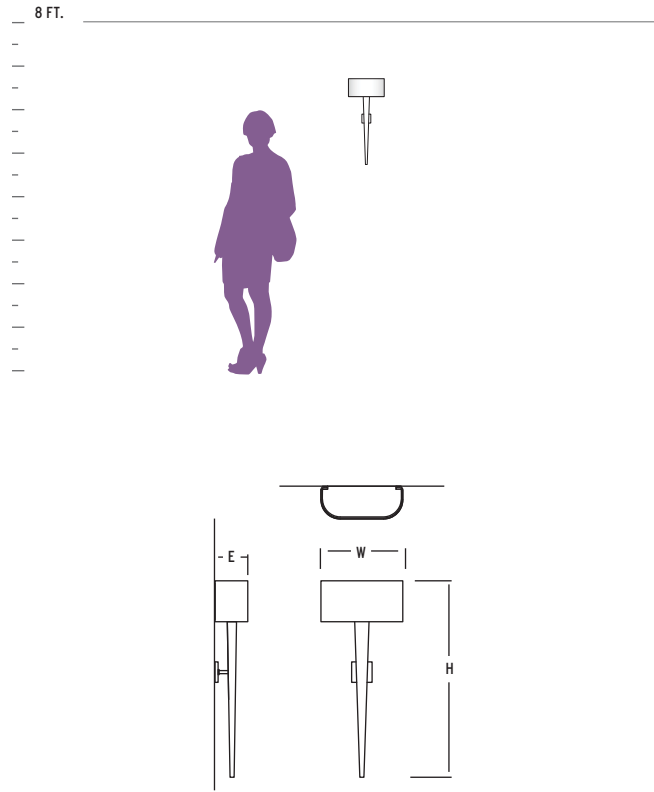

Review available options to format  
your Oxygen part number.


**2-5182-XXX**  
DIFFUSER FINISH

### 2-5182-XXX TRINITY / FLUORESCENT

DIFFUSER	White Lenin
FINISH	<b>24</b> Satin Nickel
LAMPING	1x23w Max self-ballasted GU24
DIMENSIONS	10"(w) x 24"(h) x 4"(ext)

#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Fabric shade is white cotton.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- 23w max 120V self-ballasted GU24 lamp (not included).
- Unit mounts to 4" octagonal junction box.
- Approved for wall mounting only.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

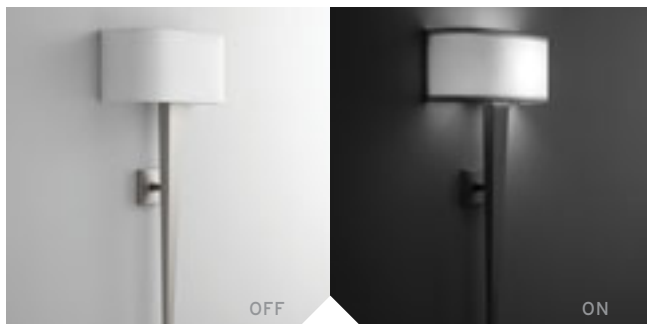



TRINITY  
sconce

WALL MOUNTS





2-5163-14

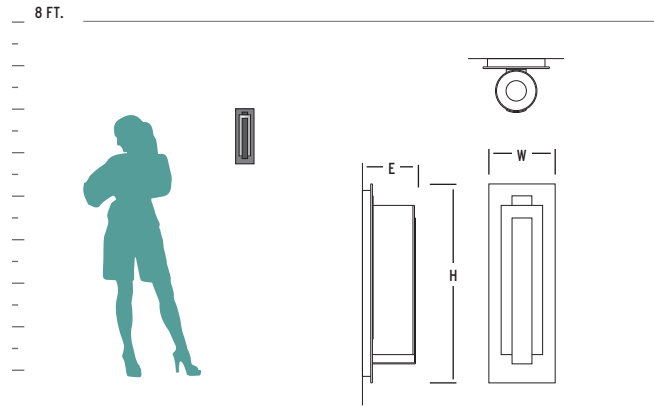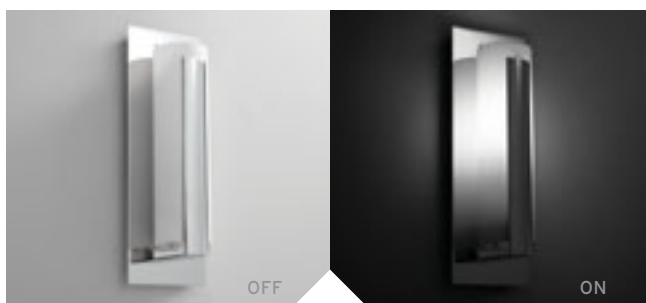

Review available options to format  
your Oxygen part number.

**2-5163-XX**  
FINISH

### 2-5163-XX UNION / FLUORESCENT

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	5"(w) x 15"(h) x 4"(ext)

### 2-5171-XX UNION / FLUORESCENT

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 13W quad 4-pin fluorescent (G24q-1) (lamp included)
DIMENSIONS	5"(w) x 15"(h) x 4"(ext)

#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Diffuser is 1/8" thick matte white acrylic.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- GU24 fluorescent ballast is electronic, NPF, rapid start, 120V.
- Installs on 4" octagonal junction box.
- Open top.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



UNION  
sconce

WALL MOUNTS


ADA

ZEPHYR sconce



2-5164-124



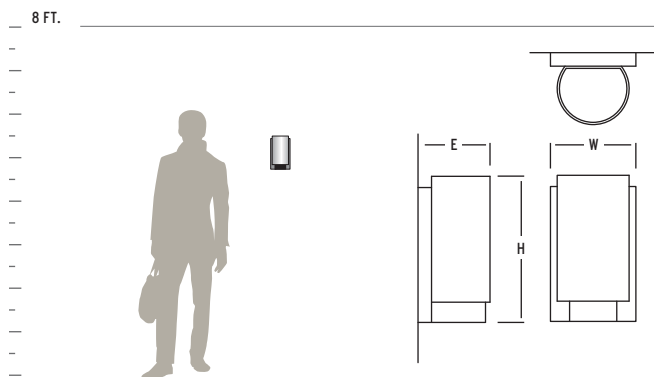

Review available options to format  
your Oxygen part number.

**2-5164-XX**  
FINISH

### 2-5164-XX ZEPHYR / FLUORESCENT

DIFFUSER	White Opal Glass
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	4.75"(w) x 8.25"(h) x 4"(ext)

### 2-5172-XX ZEPHYR / FLUORESCENT


DIFFUSER	White Opal Glass
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 13W quad 4-pin fluorescent (G24q-1) (lamp included)
DIMENSIONS	4.75"(w) x 8.25"(h) x 4"(ext)

#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Matte white glass diffuser is 1/8" thick.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- GU24 fluorescent ballast is electronic, NPF, rapid start, 120V.
- Installs on 4" octagonal junction box.
- Open top.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



**2-5164-24**

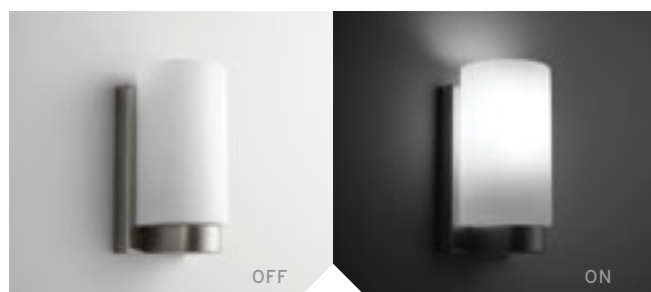

**ZEPHYR**  
sconce


WALL MOUNTS

ADA





2-5170-224

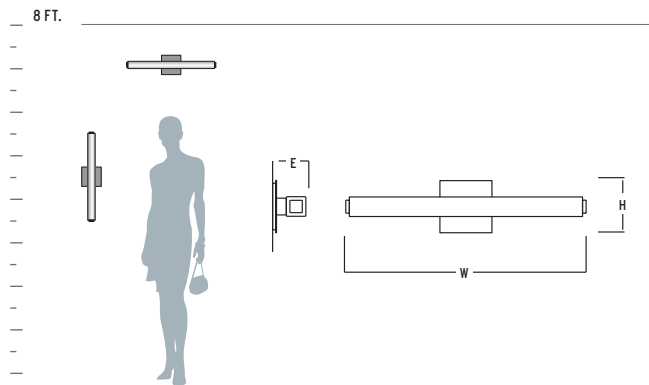

Review available options to format your Oxygen part number.

**2-5170-XXX**  
DIFFUSER FINISH

**2-5170-XXX** ADELPHI / FLUORESCENT

DIFFUSER	<b>2</b> Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 14W T5 fluorescent (mini bi-pin)
DIMENSIONS	24.25"(w) x 4.5"(h) x 3.25"(ext)

**GENERAL SPECIFICATIONS:**

- Cold rolled steel housing.
- Diffuser is 1/8" thick matte white acrylic.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Installs on 4" octagonal junction box.
- ADA compliant.
- Toolless access to lamp.
- Approved for vertical or horizontal mounting.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.







# APOLLO vanity

2-5104-14

Review available options to format  
your Oxygen part number.

**2-5106-XX**  
FINISH

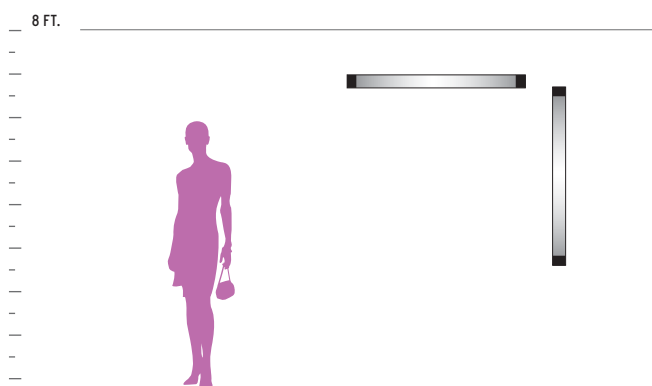

## 2-5104-XX APOLLO / FLUORESCENT / SMALL

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2 x 14W T5 linear fluorescent (mini bi-pin)
DIMENSIONS	25.25"(w) x 4.75"(h) x 3"(ext)
BALLAST	Electronic HPF, Rapid Start, Universal Voltage (120V to 277V)

## 2-5105-XX APOLLO / FLUORESCENT / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2 x 21W T5 linear fluorescent (mini bi-pin)
DIMENSIONS	37.25"(w) x 4.75"(h) x 3.75"(ext)
BALLAST	Electronic HPF, Rapid Start, Universal Voltage (120V to 277V)

## 2-5106-XX APOLLO / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2 x 28W T5 linear fluorescent (mini bi-pin)
DIMENSIONS	49"(w) x 4.75"(h) x 4"(ext)
BALLAST	Electronic HPF, Programmed Start, Universal Voltage (120V to 277V)



2-5105-24



2-5106-24

**GENERAL SPECIFICATIONS:**

- Cold-rolled steel housing.
- Diffusers are 1/8" thick matte white acrylic.
- U.L. and C.U.L. approved for damp locations.
- ADA Compliant.
- Installs to 4" octagonal junction box.
- Toolless access to lamps.
- Approved for vertical or horizontal mounting.
- Approved for wall or ceiling mount applications.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



# APOLLO vanity



**2-5178-14**

## **2-5176-XX** APOLLO / FLUORESCENT / SMALL

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2 x 14W T5 linear fluorescent (mini bi-pin)
DIMENSIONS	25.25"(w) x 4.75"(h) x 3"(ext)
BALLAST	Electronic HPF, rapid start, 120V

## **2-5177-XX** APOLLO / FLUORESCENT / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2 x 21W T5 linear fluorescent (mini bi-pin)
DIMENSIONS	37.25"(w) x 4.75"(h) x 3.75"(ext)
BALLAST	Electronic HPF, rapid start, 120V

## **2-5178-XX** APOLLO / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2 x 28W T5 linear fluorescent (mini bi-pin)
DIMENSIONS	49"(w) x 4.75"(h) x 4"(ext)
BALLAST	Electronic HPF, rapid start, 120V

### GENERAL SPECIFICATIONS:

- Cold-rolled steel housing.
- Diffusers are 1/8" thick matte white acrylic.
- U.L. and C.U.L. approved for damp locations.
- ADA Compliant.
- Energy Star Certified.
- Installs to 4" octagonal junction box.
- Toolless access to lamps.
- Approved for vertical or horizontal mounting.
- Approved for wall or ceiling mount applications.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.







# APOLLO vanity


WALL MOUNTS

ADA

ENERGY STAR

Review available options to format  
your Oxygen part number.

**2-5176-XX**  
FINISH

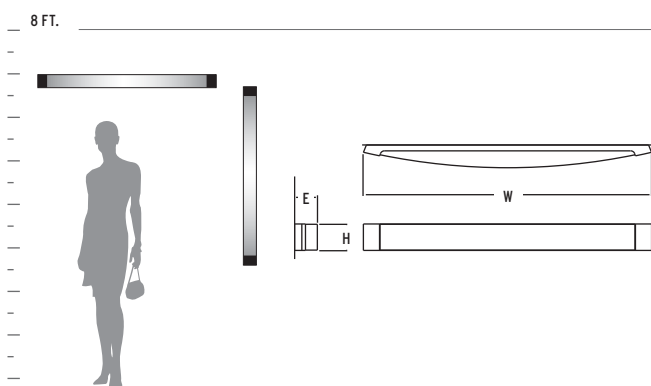


# BALANCE vanity



2-5139-24



2-5137-24

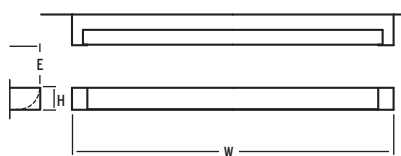

Review available options to format  
your Oxygen part number.

**2-5137-XX**  
FINISH

### **2-5137-XX** BALANCE / FLUORESCENT / SMALL

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 24W T5HO fluorescent (mini bi-pin)
DIMENSIONS	24.75"(w) x 2.5"(h) x 3.5"(ext)

### **2-5138-XX** BALANCE / FLUORESCENT / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 39W T5HO fluorescent (mini bi-pin)
DIMENSIONS	36.5"(w) x 2.5"(h) x 3.5"(ext)


### **2-5139-XX** BALANCE / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 54W T5HO fluorescent (mini bi-pin)
DIMENSIONS	48.5"(w) x 2.5"(h) x 3.5"(ext)



#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Diffusers are 1/8" thick matte white acrylic.
- U.L and C.U.L. approved for damp locations.
- ADA compliant.
- Fluorescent ballasts are electronic, HPF, programmed start, universal voltage (120V - 277V).
- All units mount to 2" X 3" junction box as standard, or 4" octagonal junction box with accessory backplate.
- Approved for horizontal mounting only.
- Toolless access to lamps.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

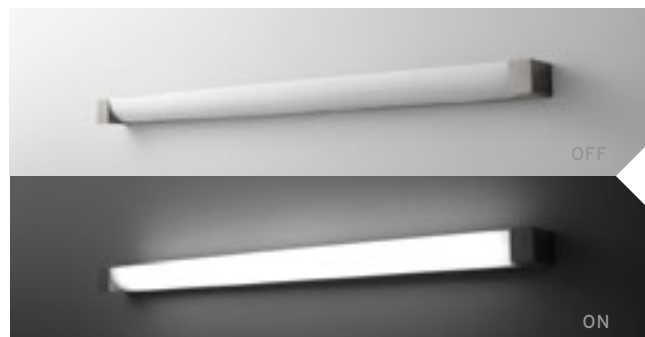

**BALANCE**  
vanity

WALL MOUNTS

ADA




**BALANCE** vanity



2-5138-24-BP324



2-5139-24-BP424

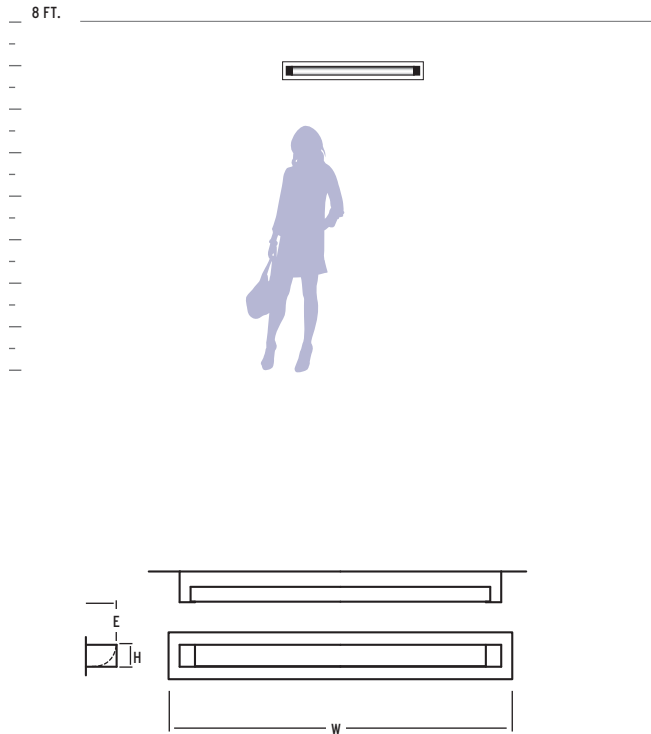

Review available options to format  
your Oxygen part number.

**2-5137-XX**  
FINISH

### **2-5137-XX-BP224** BALANCE / FLUORESCENT / SMALL

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 24W T5HO fluorescent (mini bi-pin)
DIMENSIONS	26.75"(w) x 4.5"(h) x 4"(ext)
OPTIONS	<b>BP</b> Optional Backplate

### **2-5138-XX-BP324** BALANCE / FLUORESCENT / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 39W T5HO fluorescent (mini bi-pin)
DIMENSIONS	38.5"(w) x 4.5"(h) x 4"(ext)
OPTIONS	<b>BP</b> Optional Backplate

### **2-5139-XX-BP424** BALANCE / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 54W T5HO fluorescent (mini bi-pin)
DIMENSIONS	50.5"(w) x 4.5"(h) x 4"(ext)
OPTIONS	<b>BP</b> Optional Backplate



#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Diffusers are 1/8" thick matte white acrylic.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Fluorescent ballasts are electronic, HPF, programmed start, universal voltage (120V - 277V).
- All units mount to 2" X 3" junction box as standard, or 4" octagonal junction box with accessory backplate.
- Approved for horizontal mounting only.
- Toolless access to lamps.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.




**BALANCE**  
vanity

WALL MOUNTS

ADA





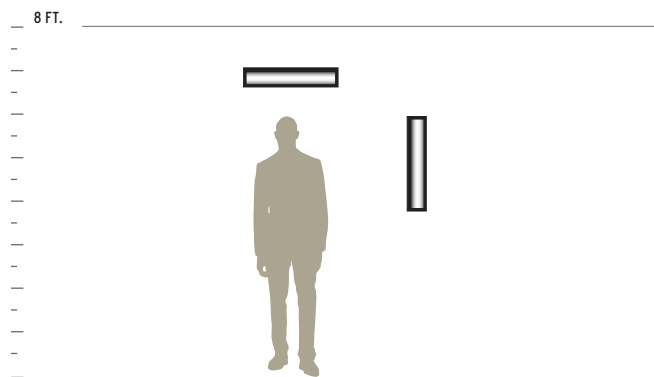

Review available options to format  
your Oxygen part number.

**2-5134-XX**  
FINISH

### 2-5134-XX FUSE / FLUORESCENT


DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	2 x 17W T8 fluorescent (medium bi-pin)
DIMENSIONS	26"(w) x 5"(h) x 4"(ext)

### 3-5134-XX FUSE / LED

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	2 x 11W 3000k LED (array included)
DIMENSIONS	26"(w) x 5"(h) x 4"(ext)
DRIVER	120V

#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Machined steel end caps.
- Acrylic diffusers are formed, 1/8" thick matte white acrylic.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Fluorescent ballasts are electronic, HPF, instant start, universal voltage (120V - 277V.)
- 3-5134-XX is ETL certified and approved for damp locations.
- Unit mounts to 4" octagonal junction box, with additional holes provided to mount direct to structure.
- Toolless access to lamps.
- Approved for vertical or horizontal mounting.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



**2-5134-24**



**FUSE**  
vanity

WALL MOUNTS


ADA

LED

# HORIZON vanity



2-587-214

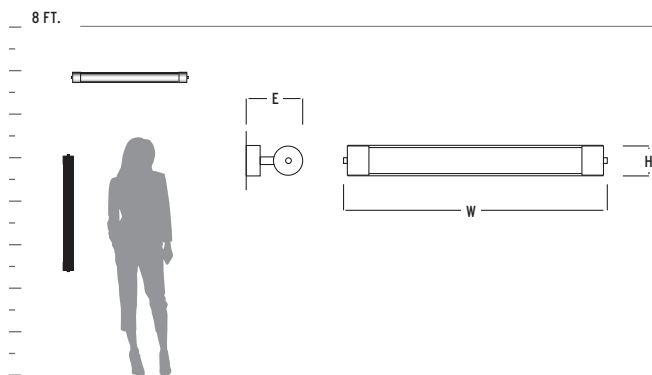

Review available options to format your Oxygen part number.

**2-583-XXX**  
DIFFUSER FINISH

### **2-583-XXX** HORIZON / FLUORESCENT / SMALL

DIFFUSER	<b>2</b> Frosted White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 17W T8 fluorescent (medium bi-pin)
DIMENSIONS	26"(w) x 3"(h) x 5.75"(ext)

### **2-585-XXX** HORIZON / FLUORESCENT / MEDIUM

DIFFUSER	<b>2</b> Frosted White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 25W T8 fluorescent (medium bi-pin)
DIMENSIONS	38.5"(w) x 3"(h) x 5.75"(ext)

### **2-587-XXX** HORIZON / FLUORESCENT / LARGE

DIFFUSER	<b>2</b> Frosted White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 32W T8 fluorescent (medium bi-pin)
DIMENSIONS	50.5"(w) x 3"(h) x 5.75"(ext)


#### GENERAL SPECIFICATIONS:

- Cold-rolled steel housing.
- Cast steel trim.
- Acrylic diffusers are extruded, 1/8" thick frosted acrylic.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballasts are electronic, HPF, instant start, universal voltage (120V to 277V).
- Unit mounts to 2" X 3" junction box with additional mounting points direct to structure.
- Approved for vertical or horizontal mounting.
- Allow 6" to either end of fixture to facilitate mounting of back plate.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.





# HORIZON vanity

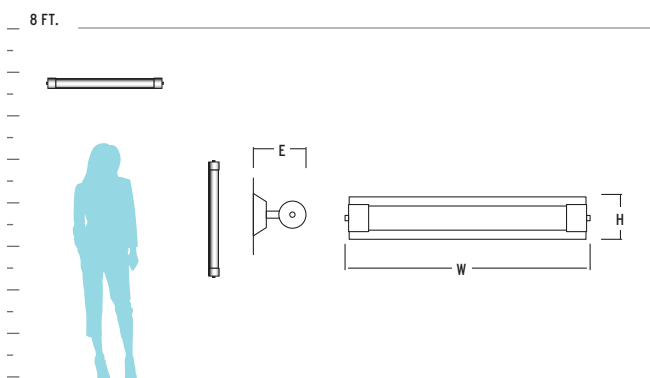

Review available options to format your Oxygen part number.

**2-582-XXX**  
DIFFUSER FINISH

## 2-582-XXX HORIZON / FLUORESCENT / SMALL

DIFFUSER	<b>2</b> Frosted White Acrylic
FINISH	<b>14</b> Polishd Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 17W T8 fluorescent (medium bi-pin)
DIMENSIONS	26"(w) x 4.5"(h) x 5.75"(ext)

## 2-584-XXX HORIZON / FLUORESCENT / MEDIUM

DIFFUSER	<b>2</b> Frosted White Acrylic
FINISH	<b>14</b> Polishd Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 25W T8 fluorescent (medium bi-pin)
DIMENSIONS	38.5"(w) x 4.5"(h) x 5.75"(ext)

## 2-586-XXX HORIZON / FLUORESCENT / LARGE

DIFFUSER	<b>2</b> Frosted White Acrylic
FINISH	<b>14</b> Polishd Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 32W T8 fluorescent (med. bi-pin)
DIMENSIONS	50.5"(w) x 4.5"(h) x 5.75"(ext)



### GENERAL SPECIFICATIONS:

- Cold-rolled steel housing.
- Cast steel trim.
- Acrylic diffusers are extruded, 1/8" thick frosted acrylic.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballasts are electronic, HPF, instant start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Approved for vertical or horizontal mounting.
- Allow 6" to either end of fixture to facilitate mounting of back plate.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.





# HORIZON

vanity

WALL MOUNTS

# PEBBLE vanity



2-5155-114

Review available options to format  
your Oxygen part number.

**2-5155-XXX**  
OPTION FINISH


## 2-5155-XXX PEBBLE / FLUORESCENT

DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome, 24 Satin Nickel
LAMPING	2 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	20.25"(w) x 6."(h) x 5.5"(ext)
OPTIONS	9 End Cap
BALLAST	Electronic HPF, programmed start, universal voltage (120V to 277V)




2-5155-114



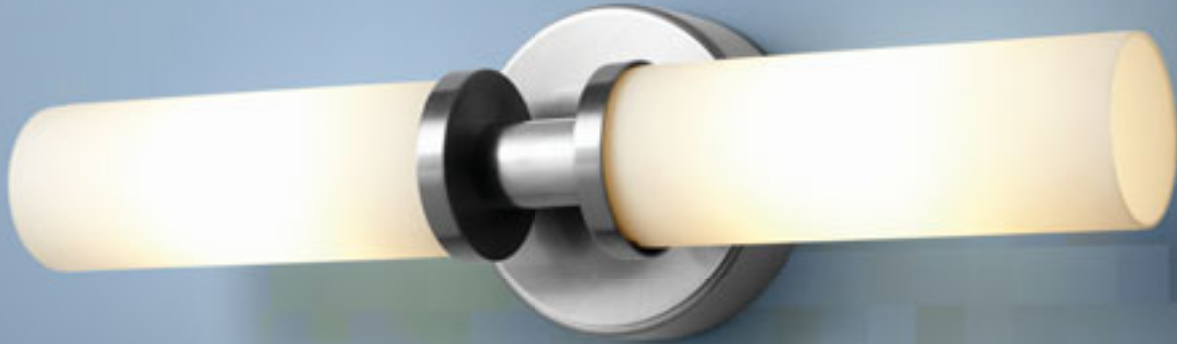


2-5155-124

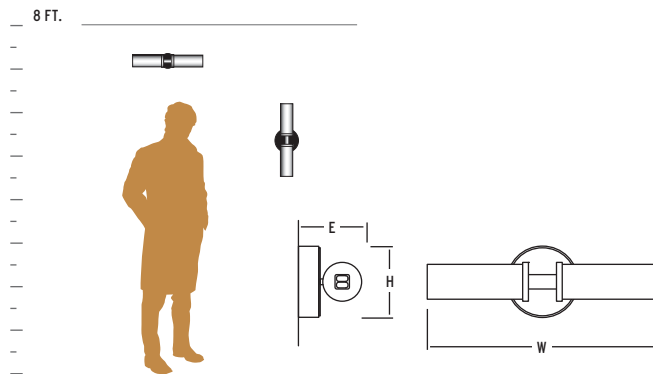

#### GENERAL SPECIFICATIONS:

- Cast and machined steel fittings.
- Diffusers screw onto housing with integral threaded fittings.
- Glass diffusers are 1/4" thick white opal duplex glass.
- U.L. and C.U.L. approved for damp locations.
- Unit mounts to 4" octagonal junction box.
- Open ends.
- Fluorescent ballasts are Electronic HPF, programmed start, universal voltage (120V to 277V).
- Toolless access to lamp.
- Approved for vertical or horizontal mounting.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

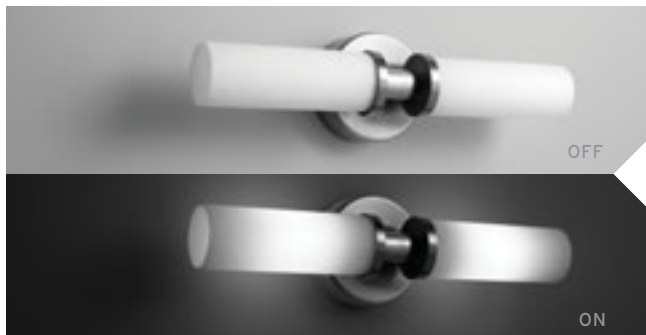

# PEBBLE vanity



2-5122-124



2-5122-914  
shown with optional end caps

Review available options to format  
your Oxygen part number.

**2-5121-XXX**  
OPTION FINISH

### 2-5121-XXX PEBBLE / INCANDESCENT

DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome, 24 Satin Nickel
LAMPING	2 x 60W T10 incandescent (medium base)
DIMENSIONS	20.5"(w) x 4.25"(h) x 4"(ext)
OPTIONS	3 Perforated Sleeve, 9 End Cap

### 2-5122-XXX PEBBLE / FLUORESCENT


DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome, 24 Satin Nickel
LAMPING	2 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	20.5"(w) x 4.25"(h) x 4"(ext)
BALLAST	Electronic, NPF, Rapid Start, 120V
OPTIONS	3 Perforated Sleeve, 9 End Cap

### 2-5174-XXX PEBBLE / FLUORESCENT

DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome, 24 Satin Nickel
LAMPING	2 x 13W quad 4-pin fluorescent (G24q-1) (lamp included)
DIMENSIONS	20.5"(w) x 4.25"(h) x 4"(ext)
BALLAST	Electronic, NPF, Rapid Start, 120V

#### GENERAL SPECIFICATIONS:



- Cast and machined steel fittings.
- Diffusers thread onto housing with integral threaded fitting.
- Glass diffusers are 1/4" thick white opal duplex glass.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Unit mounts to 4" octagonal junction box.
- Open ends.
- Optional perforated sleeve is natural steel finish.
- 2-5121-XXX and 2-5122-XXX are approved for vertical or horizontal mounting.
- 2-5174-XXX approved for horizontal mounting only.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

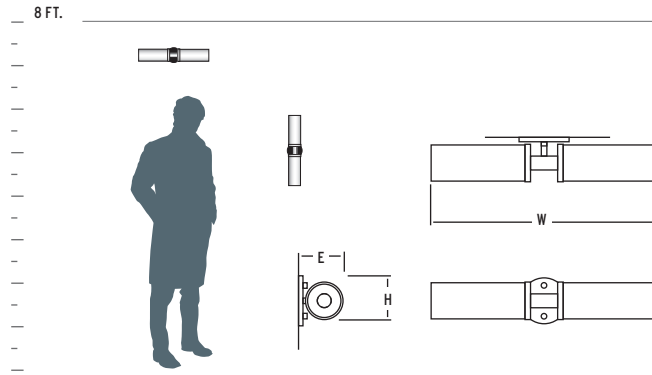

vanity  
**PEBBLE**

WALL MOUNTS

ADA

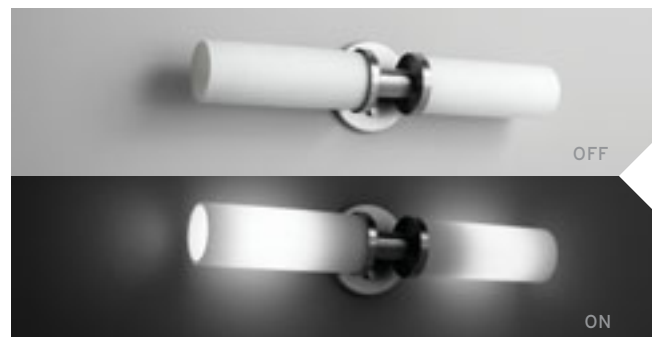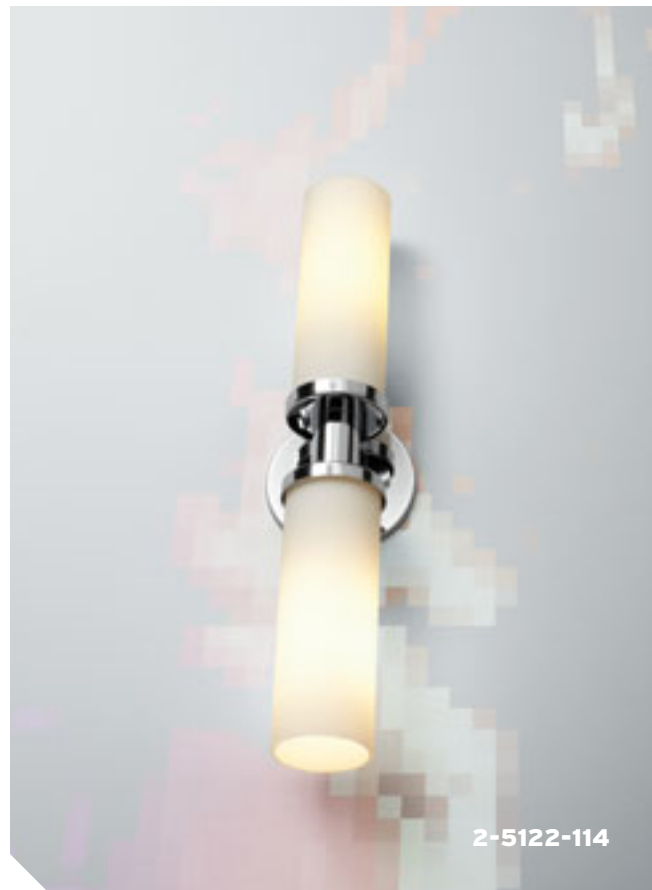

# SKYLINE vanity



2-5131-24



2-5132-14



2-5133-14



Review available options to format  
your Oxygen part number.

**2-5131-XX**  
FINISH

**2-5131-XX** SKYLINE / FLUORESCENT / SMALL



DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 14W T5 fluorescent (mini bi-pin)
DIMENSIONS	24"(w) x 3.25"(h) x 4"(ext)
BALLAST	Electronic, HPF, Rapid Start, Universal Voltage (120V - 277V)

**2-5132-XX** SKYLINE / FLUORESCENT / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 21W T5 fluorescent (mini bi-pin)
DIMENSIONS	36"(w) x 3.25"(h) x 4"(ext)
BALLAST	Electronic, HPF, Rapid Start, Universal Voltage (120V - 277V)

**2-5133-XX** SKYLINE / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 28W T5 fluorescent (mini bi-pin)
DIMENSIONS	48"(w) x 3.25"(h) x 4"(ext)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120V - 277V)

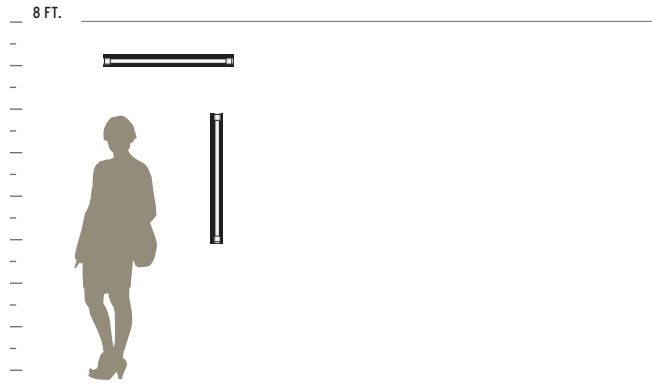

**GENERAL SPECIFICATIONS:**

- Cold rolled steel housing.
- Cast steel end caps.
- Acrylic diffusers are extruded, 1/8" thick matte white acrylic.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Unit mounts to 2" X 3" junction box, with additional holes for mounting direct to structure.
- Approved for vertical or horizontal mounting.
- Allow 6" to either end of fixture to facilitate mounting of back plate.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



vanity  
**SKYLINE**

WALL MOUNTS


ADA

2-5140-14

2-5141-14

2-5142-14

# ZENITH vanity

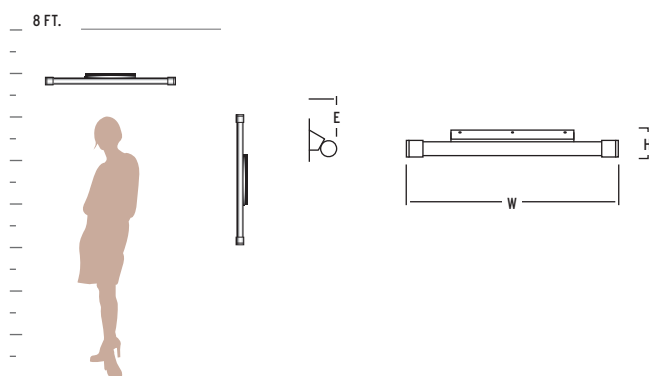

Review the diagram below to format your original Oxygen product number.

**2-5140-XX**  
FINISH

**2-5141-XX** ZENITH / FLUORESCENT / MEDIUM


DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 21W T5 fluorescent (mini bi-pin)
DIMENSIONS	35.75"(w) x 3.25"(h) x 3.25"(ext)
BALLAST	Electronic, HPF, Rapid Start, Universal Voltage (120V - 277V)

**2-5140-XX** ZENITH / FLUORESCENT / SMALL

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 14W T5 fluorescent (mini bi-pin)
DIMENSIONS	24.25"(w) x 3.25"(h) x 3.25"(ext)
BALLAST	Electronic, HPF, Rapid Start, Universal Voltage (120V - 277V)

**2-5142-XX** ZENITH / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 28W T5 fluorescent (mini bi-pin)
DIMENSIONS	47.75"(w) x 3.25"(h) x 3.25"(ext)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120V - 277V)

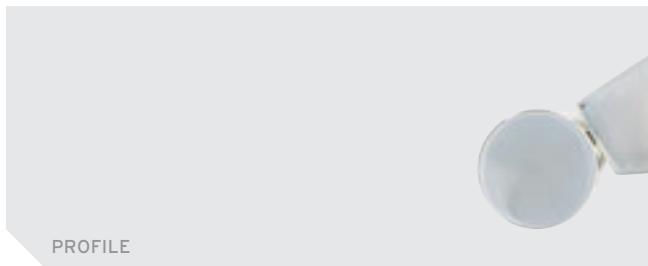

#### GENERAL SPECIFICATIONS:


- Cold rolled steel housing.
- Cast steel end caps.
- Diffusers are 1/8" thick extruded matte white acrylic.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Unit mounts to 2" X 3" junction box.
- Toolless access to lamp
- Approved for vertical or horizontal mounting.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



ZENITH vanity





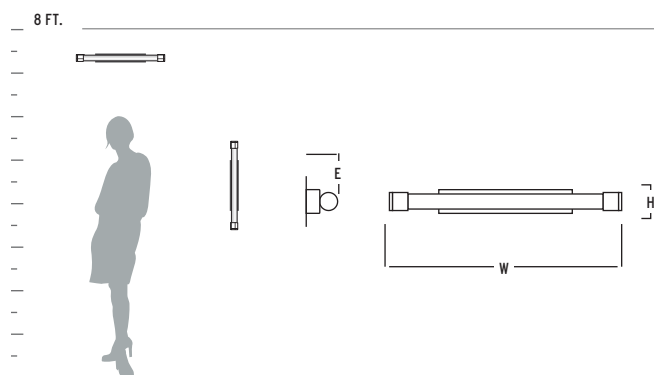

Review the diagram below to format your original Oxygen product number.

**2-5167-XX**  
FINISH

### 2-5167-XX ZENITH / FLUORESCENT / SMALL



DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 14W T5 fluorescent (mini bi-pin)
DIMENSIONS	24.25"(w) x 2.5"(h) x 3.25"(ext)
BALLAST	Electronic, HPF, Rapid Start, Universal Voltage (120V - 277V)

### 2-5169-XX ZENITH / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 28W T5 fluorescent (mini bi-pin)
DIMENSIONS	47.75"(w) x 2.5"(h) x 3.25"(ext)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120V - 277V)

#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Cast steel end caps.
- Diffusers are 1/8" thick extruded matte white acrylic.
- U.L. and C.U.L. approved for damp locations.
- ADA compliant.
- Units mounts to 2" X 3" junction box.
- Toolless access to lamp
- Approved for vertical or horizontal mounting.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

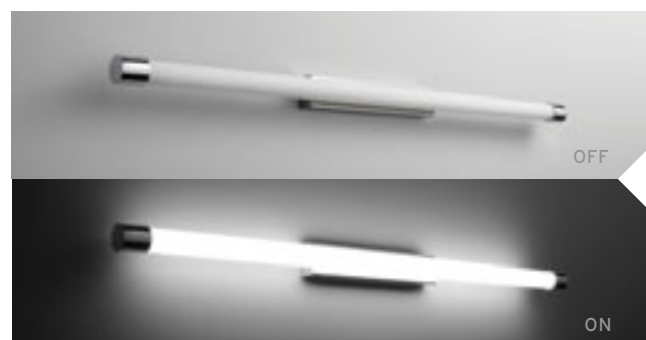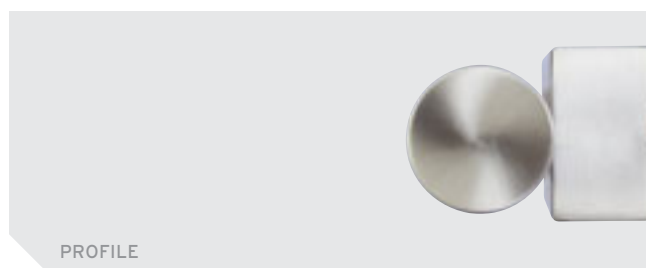

**ZENITH**  
vanity

WALL MOUNTS

ADA



# CEILING MOUNTS






# CEILING MOUNTS


visual index

CEILING MOUNTS		Alpha	92
		Dione	94
		Echelon	96
		Geo	100
		Oracle II	116
		Origin	120
		Rythm	122
		Saturna	124
ADA		Dione	94
		Echelon	96
		Journey	104
		Oracle	108
EMERGENCY		Oracle	112
		Saturna	124
		Sunfire	126
LED		Journey	104
		Oracle	110
QUICKSHIP		Dione	94
		Journey	104
		Oracle	108








CEILING MOUNTS



CEILING MOUNTS





ADA

CEILING MOUNTS

# ALPHA

ceiling mount



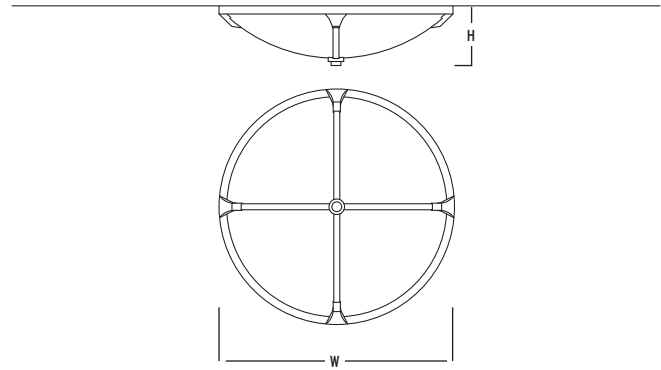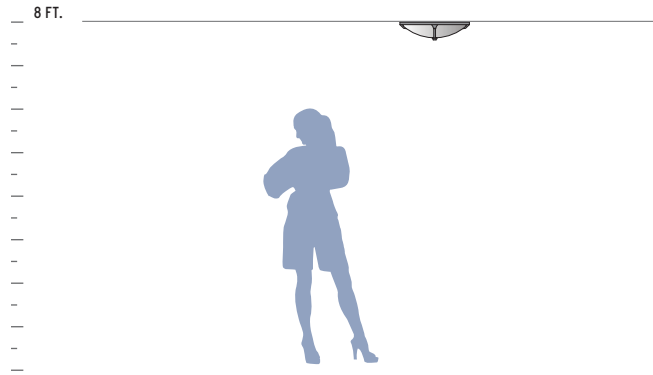

# ALPHA

ceiling mount

CEILING MOUNTS



Review available options to format your Oxygen part number.


**2-6171-XXX**  
DIFFUSER FINISH

## 2-6171-XXX ALPHA / FLUORESCENT

DIFFUSER	<b>2</b> Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	22W + 40W T5 circline fluorescent (2GX13)
DIMENSIONS	19"(w) x 4.5"(h)

### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Cast steel accents.
- Matte white acrylic is formed 1/8" thick.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mount to 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

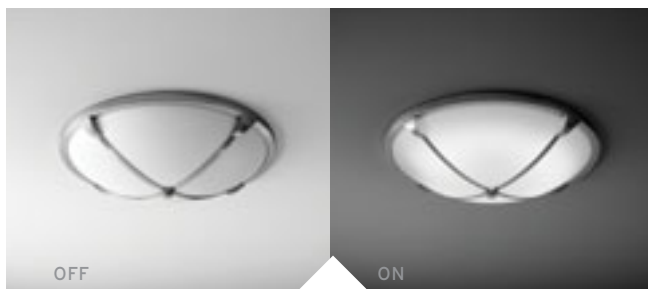


# DIONE

ceiling mount





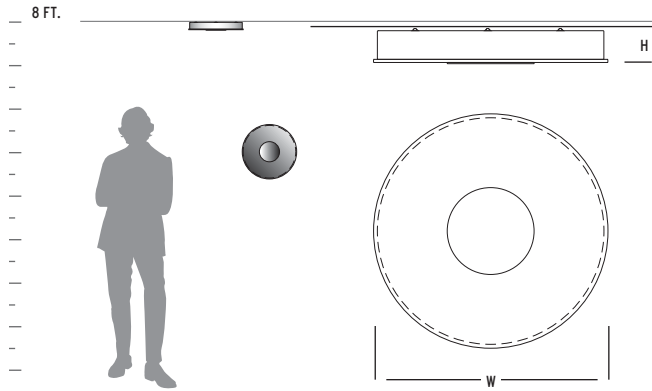

Review available options to format  
your Oxygen part number.

**2-6164-XXX**  
DIFFUSER FINISH

### 2-6164-XXX DIONE / FLUORESCENT / SMALL

DIFFUSER	1 Frosted Glass
FINISH	24 Satin Nickel
LAMPING	1 x 22W T5 circline fluorescent (2GX13)
DIMENSIONS	15"(w) x 2.25"(h)

### 2-6165-XXX DIONE / FLUORESCENT / LARGE

DIFFUSER	1 Frosted Glass
FINISH	24 Satin Nickel
LAMPING	1 x 55W T5 circline fluorescent (2GX13)
DIMENSIONS	21"(w) x 2.25"(h)

#### GENERAL SPECIFICATIONS:

- Spun steel housing.
- 1/8" frost white glass diffuser.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballasts are electronic HPF, programmed start, universal voltage (120V to 277V).
- Units mount to 4" octagonal junction box.
- Toolless access to lamp.
- ADA compliant.
- Approved for wall or ceiling mount applications.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



**DIONE**  
ceiling mount

CEILING MOUNTS



ADA



# ECHELON

ceiling mount



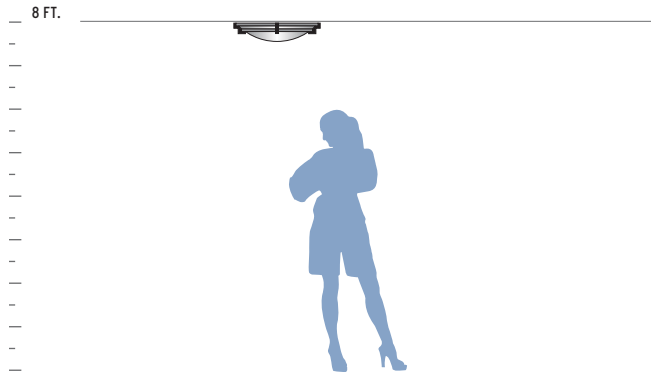

Review available options to format  
your Oxygen part number.

**2-6169-XXX**  
DIFFUSER FINISH

**ECHELON**  
ceiling mount  
CEILING MOUNTS



### 2-6169-XXX ECHELON / FLUORESCENT

DIFFUSER	<b>2</b> Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	22W + 40W T5 circline fluorescent (2GX13)
DIMENSIONS	20"(w) x 4"(h)

#### GENERAL SPECIFICATIONS:


- Cold rolled steel housing.
- Cast steel accents.
- Matte white acrylic is formed 1/8" thick.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mount to 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



ECHO ceiling mount



2-6184-22

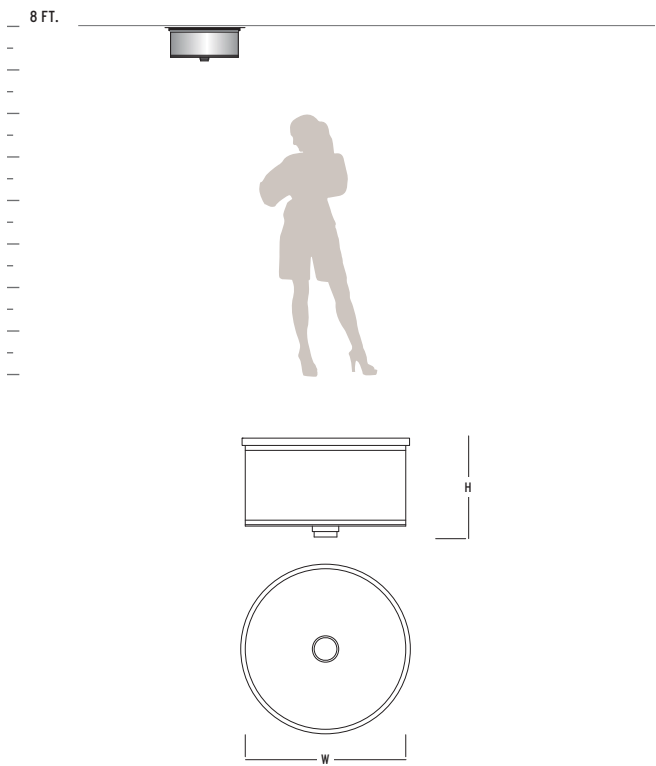

Review available options to format your Oxygen part number.

2-6184-XX  
FINISH

2-6184-22 ECHO / FLUORESCENT / SMALL

DIFFUSER	Acrylic With Natural Grass Shade
FINISH	22 Oiled Bronze
LAMPING	2 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	11.5"(w) x 7.75"(h)

2-6184-24 ECHO / FLUORESCENT / SMALL

DIFFUSER	Acrylic With White Grass Shade
FINISH	24 Satin Nickel
LAMPING	2 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	11.5"(w) x 7.75"(h)





2-6185-24

**2-6185-22** ECHO / FLUORESCENT / LARGE

DIFFUSER	Acrylic With Natural Grass Shade
FINISH	<b>22</b> Oiled Bronze
LAMPING	2 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	14.5"(w) x 7.75"(h)

**2-6185-24** ECHO / FLUORESCENT / LARGE

DIFFUSER	Acrylic With White Grass Shade
FINISH	<b>24</b> Satin Nickel
LAMPING	2 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	14.5"(w) x 7.75"(h)

**GENERAL SPECIFICATIONS:**


- Cold rolled steel housing.
- Grass shades are natural bamboo fibers.
- White acrylic diffuser is 1/8" thick.
- Cast steel with acrylic finial.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- U.L. and C.U.L. approved for dry locations only.
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.





**GEO** ceiling mount

**2-698-24**

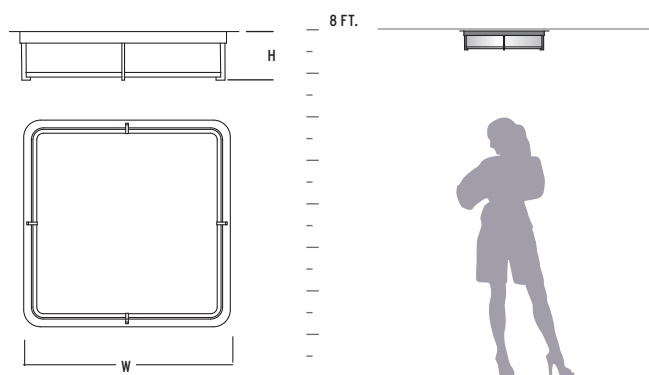

Review available options to format  
your Oxygen part number.

**2-698-XX**  
FINISH

**2-698-XX** GEO / FLUORESCENT

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	22W + 40W T5 circline fluorescent (2GX13)
DIMENSIONS	17"(w) x 4"(h)



**GEO**

ceiling mount

CEILING MOUNTS

2-698-24


#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Matte white acrylic is formed 1/16" thick.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.





2-699-24

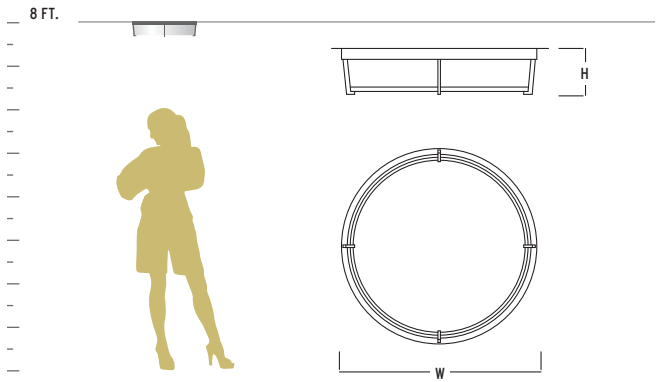

Review available options to format  
your Oxygen part number.

2-699-XX  
FINISH

2-699-XX io / FLUORESCENT

DIFFUSER	Matte White Acrylic
FINISH	24 Satin Nickel
LAMPING	22W + 40W T5 circline fluorescent (2GX13)
DIMENSIONS	17"(w) x 4 "(h)





ceiling mount

CEILING MOUNTS

2-699-24

#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Matte white acrylic is formed 1/16" thick.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.




# JOURNEY

ceiling mount



2-6136-224

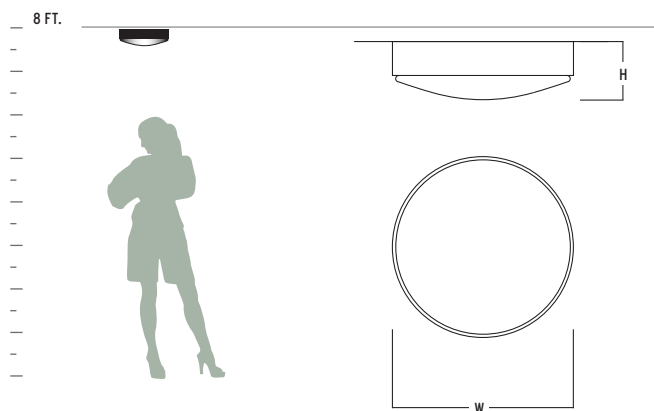

Review available options to format  
your Oxygen part number.

**2-6135-XX**  
FINISH

#### GENERAL SPECIFICATIONS:

- Spun steel housing.
- Matte white acrylic is formed 1/16" thick.
- Opal glass diffuser is 1/8" thick.
- U.L. and C.U.L. approved for damp locations.
- 3-6035-XX and 3-6135-XX are ETL certified and approved for damp locations.
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

#### 2-6136-XXX JOURNEY / FLUORESCENT / LARGE

DIFFUSER	2 Matte White Acrylic
FINISH	24 Satin Nickel
LAMPING	22W + 40W T5 circline fluorescent (2GX13)
DIMENSIONS	21"(w) x 4.75"(h)
BALLAST	Electronic, HPF, programmed start, universal voltage (120V to 277V).





**JOURNEY**  
ceiling mount

CEILING MOUNTS

LED

### 2-6114-XX JOURNEY / FLUORESCENT / MEDIUM

DIFFUSER	White Opal Glass
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	14"(w) x 4.5"(h)
BALLAST	Electronic, HPF, programmed start, universal voltage (120V to 277V).

### 2-6134-XX JOURNEY / FLUORESCENT / SMALL

DIFFUSER	White Opal Glass
FINISH	<b>24</b> Satin Nickel
LAMPING	2 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	11"(w) x 3.5"(h)
BALLAST	Electronic, HPF, rapid start, universal voltage (120V to 277V).

### 2-6135-XX JOURNEY / FLUORESCENT / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	2 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	14"(w) x 4.5"(h)
BALLAST	Electronic, HPF, programmed start, universal voltage (120V to 277V).

### 3-6035-XX JOURNEY / LED / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 11W 3000K LED (array included)
DIMENSIONS	14"(w) x 4.5"(h)
DRIVER	120V

### 3-6135-XX JOURNEY / LED / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	2 x 11W 3000K LED (array included)
DIMENSIONS	14"(w) x 4.5"(h)
DRIVER	120V




# MODULO

ceiling mount





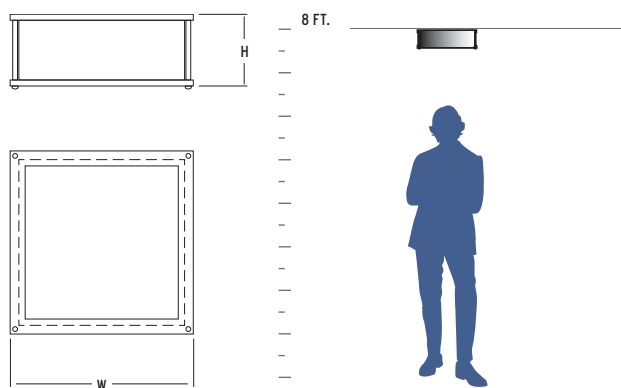

Review available options to format  
your Oxygen part number.

**2-692-XXX**  
DIFFUSER FINISH

### 2-692-XXX MODULO / FLUORESCENT / SMALL

DIFFUSER	<b>2</b> Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	2 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	12"(w) x 4.75"(h)

### 2-693-XXX MODULO / FLUORESCENT / MEDIUM


DIFFUSER	<b>2</b> Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	22W + 40W T5 circline fluorescent (2GX13)
DIMENSIONS	16"(w) x 4.75"(h)

### 2-694-XXX MODULO / FLUORESCENT / LARGE

DIFFUSER	<b>2</b> Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	22W + 40W T5 circline fluorescent (2GX13)
DIMENSIONS	24"(w) x 4.75"(h)

#### GENERAL SPECIFICATIONS:

- Formed steel trim.
- Cold rolled steel housing.
- White acrylic diffuser is 1/16" thick.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballasts are electronic HPF, programmed start, universal voltage, (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamps.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

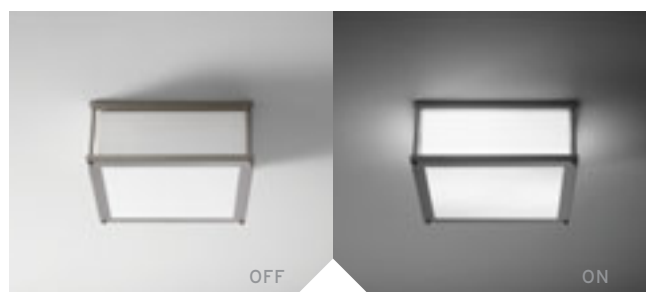

ceiling mount

**MODULO**

CEILING MOUNTS



ORACLE ceiling mount







# ORACLE

ceiling mount

2-6111-24

## 2-6111-XX ORACLE / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	32W + 40W T9 circline fluorescent (G10Q)
DIMENSIONS	23.75"(w) x 5"(h)
BALLAST	Electronic, HPF, Instant Start, 120V

Review available options to format your Oxygen part number.


**2-6110-XX**  
FINISH

## 2-6175-XX ORACLE / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	4 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	23.75"(w) x 5"(h)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120V To 277V).

### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Formed steel trim.
- White acrylic diffuser is 1/16" thick.
- U.L. and C.U.L. approved for damp locations.
- 3-6010-XX and 3-6110-XX are ETL certified and approved for damp locations.
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamp.
- Approved for wall or ceiling mount applicaitons.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

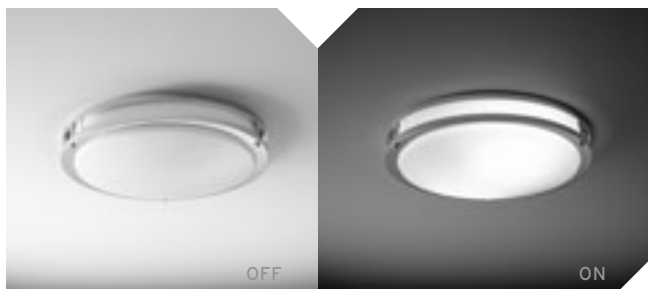






2-6109-14



2-6110-14

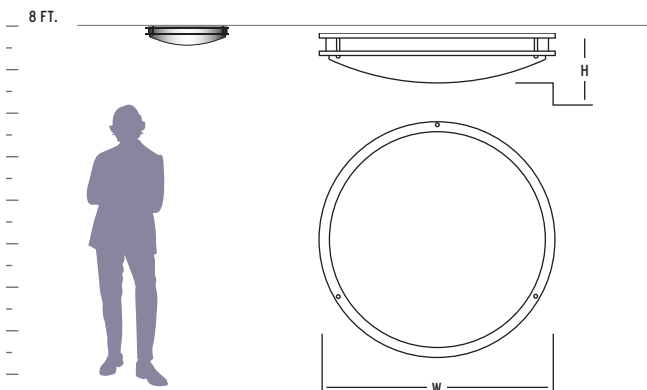

### 2-6109-XX ORACLE / FLUORESCENT / SMALL

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 22W T9 circline fluorescent (G10Q)
DIMENSIONS	10.5"(w) x 3.5"(h)
BALLAST	Electronic, HPF, Instant Start, 120V

### 2-6173-XX ORACLE / FLUORESCENT / SMALL

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	10.5"(w) x 3.5"(h)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120V To 277V).

### 2-6110-XX ORACLE / FLUORESCENT / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1-22W + 1-32W T9 circline fluorescent (G10Q)
DIMENSIONS	17.75"(w) x 4.25"(h)
BALLAST	Electronic, HPF, Instant Start, 120V

### 2-6174-XX ORACLE / FLUORESCENT / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	17.75"(w) x 4.25"(h)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120V To 277V).

### 3-6010-XX ORACLE / LED / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	1 x 11W 3000k LED (array included)
DIMENSIONS	17.75"(w) x 4.25"(h)
DRIVER	120V

### 3-6110-XX ORACLE / LED / MEDIUM


DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2 x 11W 3000k LED (array included)
DIMENSIONS	17.75"(w) x 4.25"(h)
DRIVER	120V

ceiling mount  
**ORACLE**

CEILING MOUNTS

LED

# ORACLE ceiling mount

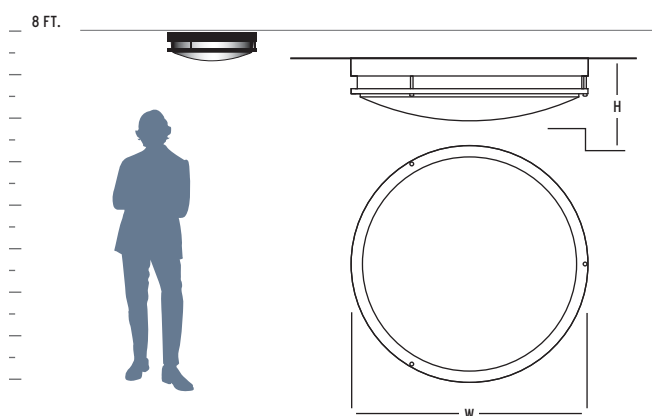

Review available options to format your Oxygen part number.

**2-6142-XX**  
FINISH

For integral emergency ballast option, add -EM to the end of your part number.

**2-6142-XX-EM**  
FINISH

## 2-6142-XX ORACLE / FLUORESCENT / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	22W + 32W T9 circline fluorescent (G10Q)
DIMENSIONS	17.75"(w) x 5.5"(h)
BALLAST	Electronic, HPF, Instant Start, 120V
OPTIONS	<b>EM</b> Integral emergency ballast

## 2-6143-XX ORACLE / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	32W + 40W T9 circline fluorescent (G10Q)
DIMENSIONS	23.75"(W) x 6.25"(h)
BALLAST	Electronic, HPF, Instant Start, 120V
OPTIONS	<b>EM</b> Integral emergency ballast

## 2-6177-XX ORACLE / FLUORESCENT / MEDIUM

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	2 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	17.75"(w) X 5.5"(h)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120v To 277V)
OPTIONS	<b>EM</b> Integral emergency ballast

## 2-6178-XX ORACLE / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>24</b> Satin Nickel
LAMPING	4 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	23.75"(w) x 6.25"(h)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120v To 277V)
OPTIONS	<b>EM</b> Integral emergency ballast

### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Spun steel trim.
- White acrylic diffuser is 1/16" thick.
- U.L. and C.U.L. approved for damp locations.
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamp.
- Optional Emergency ballast is Bodine B94G series, up to 450 lumen output in emergency mode.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.





2-6178-24



2-6142-24

ORACLE

ceiling mount

CEILING MOUNTS

EM

# ORACLE

ceiling mount



2-6112-24

Review available options to format  
your Oxygen part number.

**2-6112-XX**  
FINISH

## 2-6112-XX ORACLE / FLUORESCENT

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2 x 32W T9 circline fluorescent (G10Q)
DIMENSIONS	32.5"(l) x 18.25"(w) x 4.75"(h)
BALLAST	Electronic HPF, Instant Start, 120V

## 2-6176-XX ORACLE / FLUORESCENT

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	3 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	32.5"(l) x 18.25"(w) x 4.75"(h)
BALLAST	Electronic, HPF, Programmed Start, Universal Voltage (120v To 277V)

### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Formed steel trim.
- White acrylic diffuser is 1/16" thick.
- U.L. and C.U.L. approved for damp locations.
- Unit mounts to 4" octagonal junction box, with additional holes supplied to mount direct to structure.
- Toolless access to lamps.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.









# ORACLE

ceiling mount

CEILING MOUNTS

2-6176-14

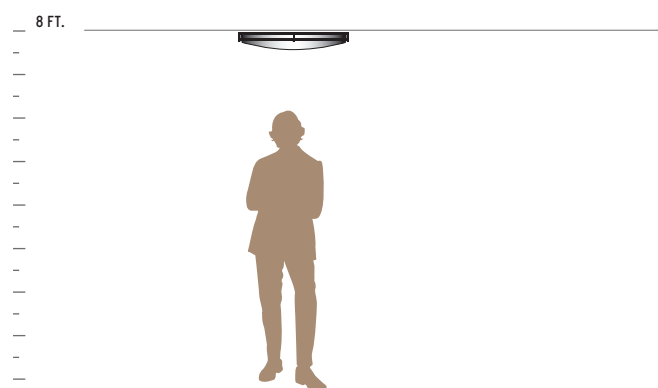



ORACLE II ceiling mount



# ORACLE II

ceiling mount



2-6166-216



2-6167-295

Review available options to format your Oxygen part number.


**2-6166-XXX**  
DIFFUSER FINISH

**2-6166-XXX**  ORACLE / FLUORESCENT / SMALL

DIFFUSER	<b>2</b> Matte White Acrylic
FINISH	<b>06</b> White, <b>16</b> Gray, <b>95</b> Old World
LAMPING	1 x 22W T9 circline fluorescent (G10Q)
DIMENSIONS	10.5"(w) X 3.5"(h)


**2-6182-XXX**  ORACLE / FLUORESCENT / SMALL

DIFFUSER	<b>2</b> Matte White Acrylic
FINISH	<b>06</b> White, <b>16</b> Gray, <b>95</b> Old World
LAMPING	1 x 22W T9 circline fluorescent (G10Q) 3000k (lamp included)
DIMENSIONS	10.5"(w) X 3.5"(h)

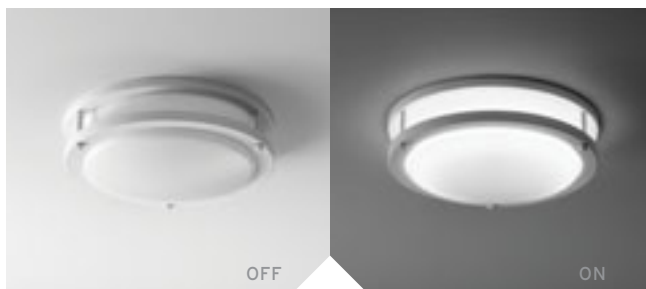

OFF

ON

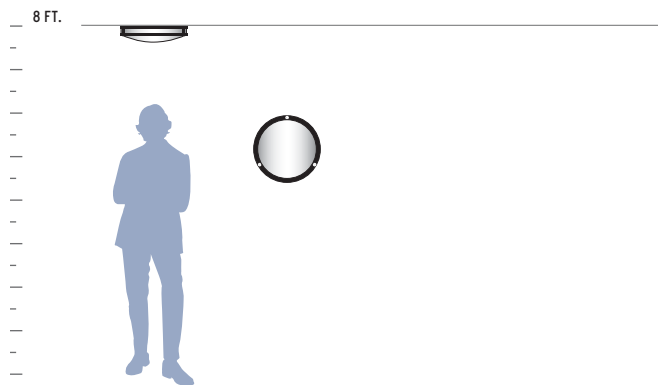

**2-6167-XXX** ORACLE / FLUORESCENT / MEDIUM

DIFFUSER	<b>2</b> Matte White Acrylic
FINISH	<b>06</b> White, <b>16</b> Gray, <b>95</b> Old World
LAMPING	22W + 32W T9 circline fluorescent (G10Q)
DIMENSIONS	17.75"(w) X 4"(h)

**2-6183-XXX** ORACLE / FLUORESCENT / MEDIUM

DIFFUSER	<b>2</b> Matte White Acrylic
FINISH	<b>06</b> White, <b>16</b> Gray, <b>95</b> Old World
LAMPING	22W + 32W T9 circline fluorescent (G10Q) 3000k (lamps included)
DIMENSIONS	17.75"(w) X 4"(h)






2-6168-216

ORACLE II

ceiling mount

CEILING MOUNTS



#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Formed steel trim.
- White acrylic diffuser is 1/16" thick.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballast is electronic, NPF, rapid start, 120V.
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamp.
- 2-6116-XXX, 2-6167-XXX, and 2-6168-XXX approved for wall or ceiling mount applications.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.


#### 2-6168-XXX ORACLE / FLUORESCENT / LARGE

DIFFUSER	2 Matte White Acrylic
FINISH	06 White, 16 Gray, 95 Old World
LAMPING	32W + 40W T9 circline fluorescent (G10Q)
DIMENSIONS	23.75"(w) x 5"(h)





**ORIGIN** ceiling mount

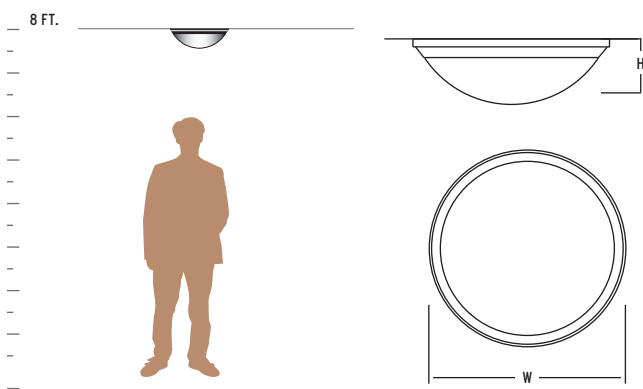

Review available options to format  
your Oxygen part number.

**2-6113-XX**  
FINISH

**2-6113-XX** ORIGIN / FLUORESCENT

DIFFUSER	White Opal Glass
FINISH	<b>24</b> Satin Nickel
LAMPING	2 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	16.5"(w) x 5.5"(h)



**ORIGIN**

ceiling mount

CEILING MOUNTS

#### GENERAL SPECIFICATIONS:

- Stamped and spun steel housing.
- 1/8" white opal glass twist-fit diffuser.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballasts are electronic HPF, programmed start, universal voltage (120V to 277V.)
- Units mount to 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.






# RHYTHM

ceiling mount

Review available options to format  
your Oxygen part number.

**2-6138-X**  
FINISH

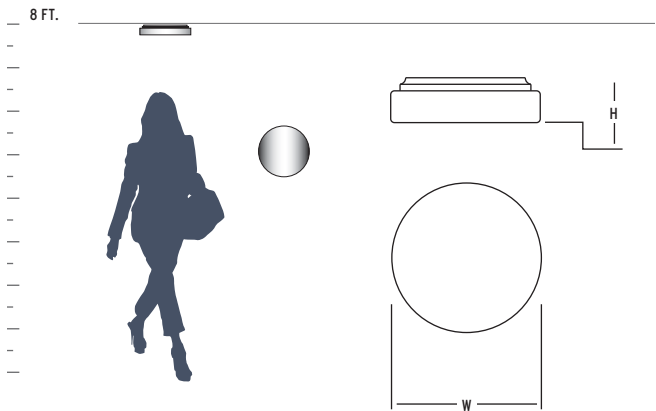

**2-6138-X** RHYTHM / FLUORESCENT / SMALL

DIFFUSER	Matte White Acrylic
FINISH	<b>6</b> White
LAMPING	1 x 22W T9 circline fluorescent (G10Q)
DIMENSIONS	10"(w) x 3"(h)

**2-6139-X** RHYTHM / FLUORESCENT / LARGE

DIFFUSER	Matte White Acrylic
FINISH	<b>6</b> White
LAMPING	22W + 32W T9 circline fluorescent (G10Q)
DIMENSIONS	14"(w) x 2.75"(ext)






# RHYTHM

ceiling mount

CEILING MOUNTS

ADA

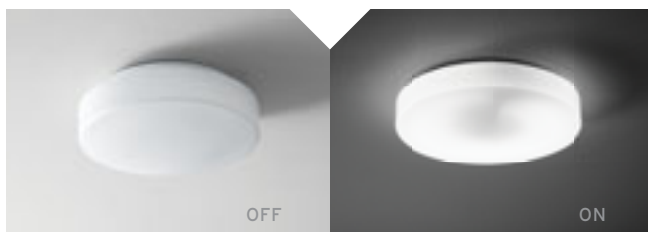

## GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- White acrylic diffuser is 1/16" thick.
- Fluorescent ballasts are electronic HPF, instant start, 120V.
- U.L. and C.U.L. approved for damp locations.
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamp.
- Approved for wall or ceiling mount applications.
- ADA compliant.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



# SATURNA

ceiling mount

2-6189-114

Review available options to format your Oxygen part number.

**2-6189-XXX**  
DIFFUSER FINISH

For integral emergency ballast option, add -EM to the end of your part number.

**2-6189-XXX-EM**  
DIFFUSER FINISH

## 2-6188-XXX SATURNA / INCANDESCENT

DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome, 24 Satin Nickel
LAMPING	2 x 60W A19 incandescent (medium base)
DIMENSIONS	17"(w) x 6.5"(h)

## 2-6189-XXX SATURNA / FLUORESCENT

DIFFUSER	1 White Opal Glass, 2 Matte White Acrylic
FINISH	14 Polished Chrome, 24 Satin Nickel
LAMPING	2 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	17"(w) x 6.5"(h)
OPTIONS	EM Integral emergency ballast






# SATURNA

ceiling mount

CEILING MOUNTS

EM

2-6189-124

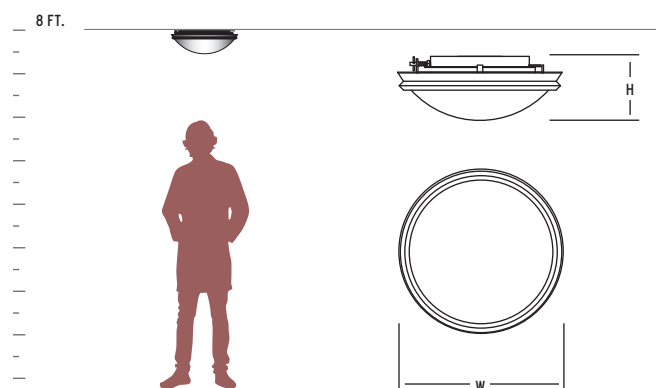

## GENERAL SPECIFICATIONS:

- Cold rolled housing and trim.
- Tube steel trim with adjustable threaded inserts.
- White opal bowl is 3/8" pressed glass.
- Acrylic bowls are 3/16" matte white.
- Spring loaded pull ring allows toolless access to lamps.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballasts are electronic, HPF, programmed start, universal voltage (120V to 277V).
- Incandescent fixtures are 120V.
- Unit mounts to 4" octagonal junction box.
- Optional emergency ballast is Bodine B94G series, up to 525 lumen output in emergency mode.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.




# SUNFIRE

ceiling mount





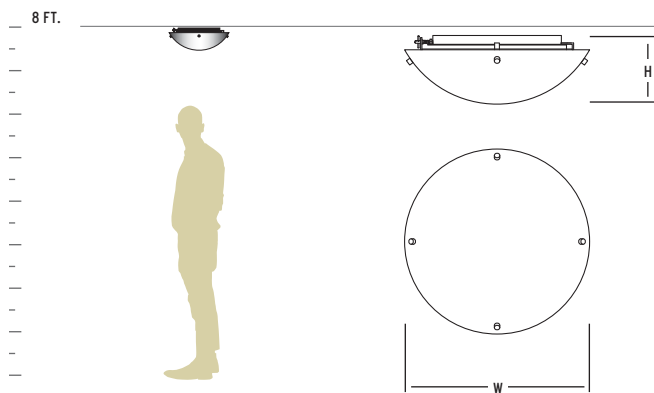

Review available options to format your Oxygen part number.

**2-6187-XXX**  
DIFFUSER FINISH

For integral emergency ballast option, add -EM to the end of your part number.

**2-6187-XXX-EM**  
DIFFUSER FINISH

#### 2-6186-XXX SUNFIRE / INCANDESCENT

DIFFUSER	1 White Opal Glass
FINISH	14 Polished Chrome, 24 Satin Nickel
LAMPING	2 x 60W A19 incandescent (medium base)
DIMENSIONS	17"(w) x 6.5"(h)

#### 2-6187-XXX SUNFIRE / FLUORESCENT

DIFFUSER	1 White Opal Glass, 2 Matte White Acrylic
FINISH	14 Polished Chrome, 24 Satin Nickel
LAMPING	2 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	17"(w) x 6.5"(h)
OPTIONS	EM Integral emergency ballast

#### GENERAL SPECIFICATIONS:

- Cold rolled housing and trim.
- Glass bowls are 3/8" pressed glass.
- Acrylic bowls are 3/16" matte white.
- Spring loaded pull ring allows toolless access to lamps.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballasts are electronic, HPF, programmed start, universal voltage (120V to 277V).
- Incandescent fixtures are 120V.
- Unit mounts to 4" octagonal junction box.
- Optional emergency ballast is Bodine B94G series, up to 525 lumen output in emergency mode.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



ceiling mount  
**SUNFIRE**

CEILING MOUNTS

EM



# THEORY

ceiling mount


2-697-224

Review available options to format  
your Oxygen part number.

**2-697-XXX**  
DIFFUSER FINISH

## 2-697-XXX THEORY / FLUORESCENT

DIFFUSER	<b>2</b> Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	16.75"(w) x 4"(h)

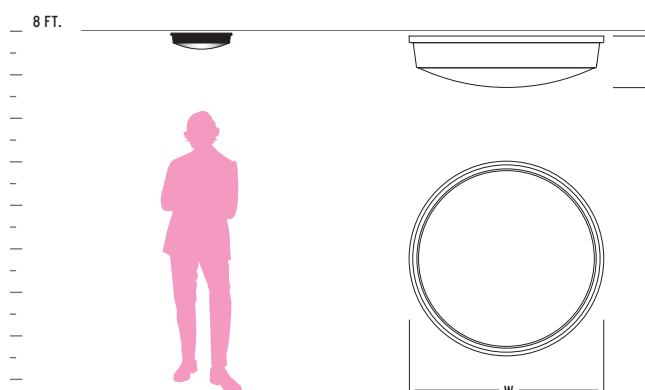



# THEORY

ceiling mount

## CEILING MOUNTS

2-697-214

### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Formed steel trim.
- White acrylic diffuser is 1/16" thick.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.





# PENDANTS





# PENDANT

visual index

## PENDANTS



## QUICK SHIP








Echo

136



Fila

142

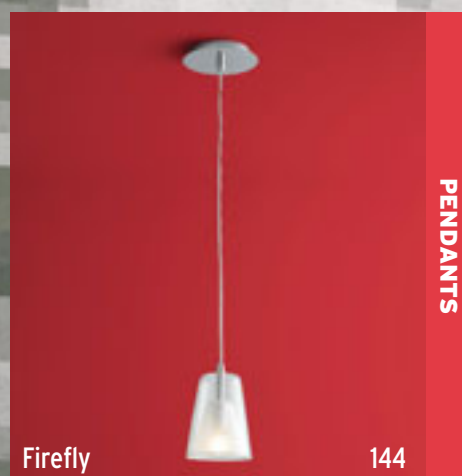

Firefly


144

PENDANTS



Lotus

150

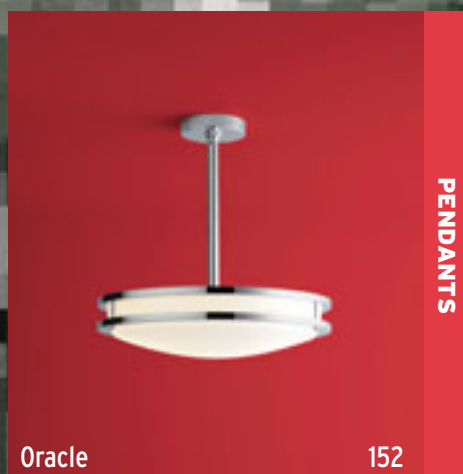


Oracle

152

PENDANTS

PENDANTS

# DIONE pendant

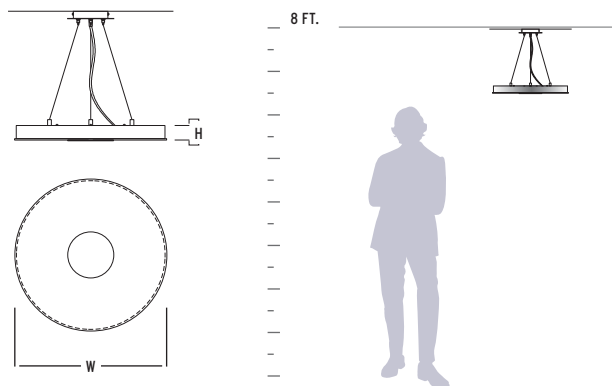

Review available options to format your Oxygen part number.

**2-6160-XXX**  
DIFFUSER FINISH

## 2-6160-XXX DIONE / FLUORESCENT / SMALL

DIFFUSER	1 Frosted Glass
FINISH	24 Satin Nickel
LAMPING	1 x 22W T5 circline fluorescent (2GX13)
DIMENSIONS	15"(w) x 2.25"(h)

## 2-6161-XXX DIONE / FLUORESCENT / LARGE


DIFFUSER	1 Frosted Glass
FINISH	24 Satin Nickel
LAMPING	1 x 55W T5 circline fluorescent (2GX13)
DIMENSIONS	21"(w) x 2.25"(h)

### GENERAL SPECIFICATIONS:

- Spun steel housing.
- Frost white glass diffuser is 1/8" thick.
- Fluorescent ballasts are electronic, HPF, programmed start, universal voltage (120V to 277V).
- Aircraft cable support.
- U.L. and C.U.L. approved for damp locations.
- 4' cord/cable provided.
- Units mount to 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



2-6161-24

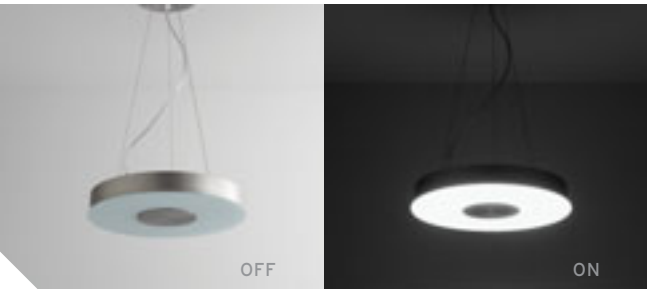







**DIONE**  
pendant

PENDANTS

ECHO pendant



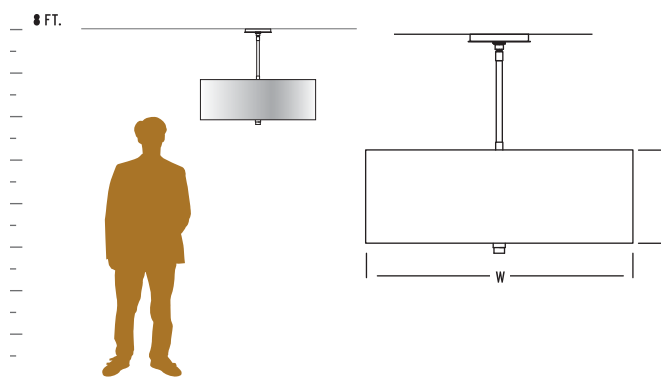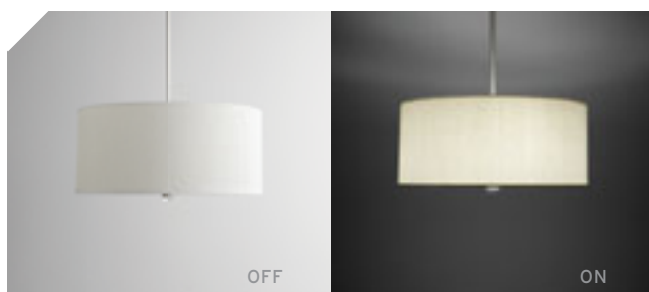

Review available options to format  
your Oxygen part number.

**2-6207-XX**  
FINISH

### 2-6207-22 ECHO / FLUORESCENT / LARGE

DIFFUSER	Acrylic With Natural Grass Shade
FINISH	<b>22</b> Oiled Bronze
LAMPING	3x23W (GU24) (lamps included)
DIMENSIONS	23"(w) x 13"(h)

### 2-6207-24 ECHO / FLUORESCENT / LARGE

DIFFUSER	Acrylic With White Grass Shade
FINISH	<b>24</b> Satin Nickel
LAMPING	3x23W (GU24) (lamps included)
DIMENSIONS	23"(w) x 13"(h)

#### GENERAL SPECIFICATIONS:

- Cold rolled Steel Canopy.
- Grass shades are natural bamboo fibers.
- U.L and C.U.L. approved for Dry locations.
- 23w, 2700k, 120V self-ballasted GU24 lamps included.
- Acrylic diffuser.
- Cast steel with acrylic finial.
- Height measured without stem.
- Stem is custom cut at oxygen facility to customer's specification.
- Toolless lamp access.
- Canopy swivel allows for mounting on sloped ceilings - up to 30-degrees.
- Unit mounts to 4" octagonal junction box.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



pendant  
**ECHO**

PENDANTS



# ECHO

pendant




2-6206-22





2-6206-24

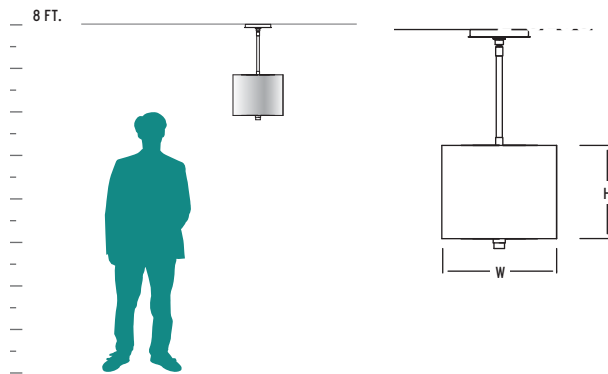

Review available options to format  
your Oxygen part number.

**2-6206-XX**

FINISH

**2-6206-22** ECHO / FLUORESCENT / MEDIUM

DIFFUSER	Acrylic With Natural Grass Shade
FINISH	<b>22</b> Oiled Bronze
LAMPING	1x23W (GU24) (lamp included)
DIMENSIONS	12"(w) x 13.25"(h)

**2-6206-24** ECHO / FLUORESCENT / MEDIUM

DIFFUSER	Acrylic With White Grass Shade
FINISH	<b>24</b> Satin Nickel
LAMPING	1x23W (GU24) (lamp included)
DIMENSIONS	12"(w) x 13.25"(h)

#### GENERAL SPECIFICATIONS:

- Cold rolled Steel Canopy.
- Grass shades are natural bamboo fibers.
- U.L and C.U.L. approved for Dry locations.
- 23w, 2700k, 120V self-ballasted GU24 lamps included.
- Acrylic diffuser.
- Cast steel with acrylic finial.
- Height measured without stem.
- Stem is custom cut at oxygen facility to customer's specification.
- Toolless lamp access.
- Canopy swivel allows for mounting on sloped ceilings - up to 30-degrees.
- Unit mounts to 4" octagonal junction box.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



pendant  
**ECHO**

PENDANTS


# ECHO

pendant



2-6205-24



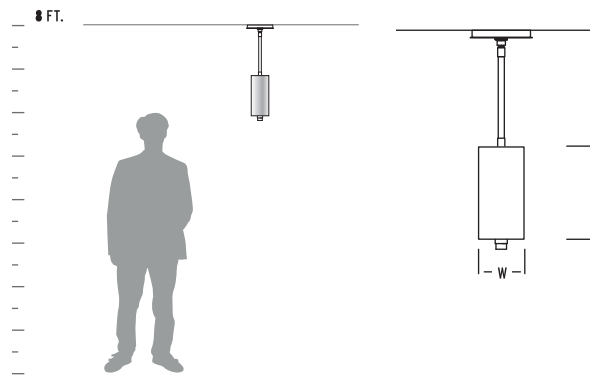

Review available options to format  
your Oxygen part number.

**2-6205-XX**  
FINISH

**2-6205-22** ECHO / FLUORESCENT / SMALL


DIFFUSER	Acrylic With Natural Grass Shade
FINISH	<b>22</b> Oiled Bronze
LAMPING	1x23W (GU24) (lamp included)
DIMENSIONS	6"(w) x 15"(h)

**2-6205-24** ECHO / FLUORESCENT / SMALL

DIFFUSER	Acrylic With White Grass Shade
FINISH	<b>24</b> Satin Nickel
LAMPING	1x23W (GU24) (lamp included)
DIMENSIONS	6"(w) x 15"(h)

**GENERAL SPECIFICATIONS:**

- Cold rolled Steel Canopy.
- Grass shades are natural bamboo fibers.
- U.L. and C.U.L. approved for Dry locations.
- 23w, 2700k, 120V self-ballasted GU24 lamps included.
- Acrylic diffuser.
- Cast steel with acrylic finial.
- Height measured without stem.
- Stem is custom cut at oxygen facility to customer's specification.
- Toolless lamp access.
- Canopy swivel allows for mounting on sloped ceilings - up to 30-degrees.
- Unit mounts to 4" octagonal junction box.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

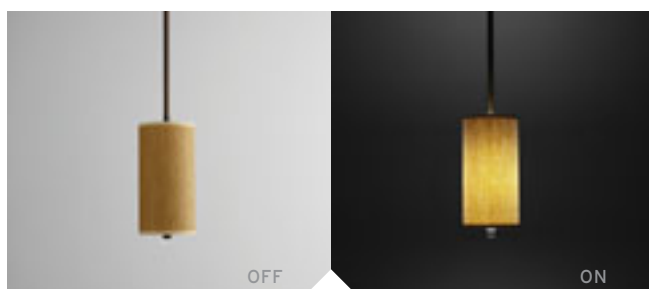


pendant  
**ECHO**  
PENDANTS

FILA pendant





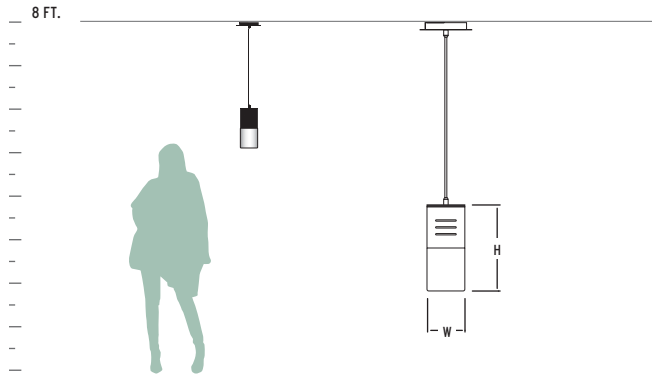

Review available options to format  
your Oxygen part number.

**2-6157-XXX**  
DIFFUSER FINISH

### **2-6157-XXX** FILA / FLUORESCENT

DIFFUSER	1 White Opal Glass
FINISH	16 Gray
LAMPING	1 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	4.25"(w) x 9.75"(h)

#### **GENERAL SPECIFICATIONS:**


- Cold rolled steel canopy.
- Extruded aluminum housing.
- White opal glass is 3/16" thick.
- Fluorescent ballasts are electronic, NPF, rapid start, 120V.
- 8' cord provided.
- U.L. and C.U.L. approved for dry locations only.
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamps.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



**FILA**  
pendant

PENDANTS



**2-6157-116**

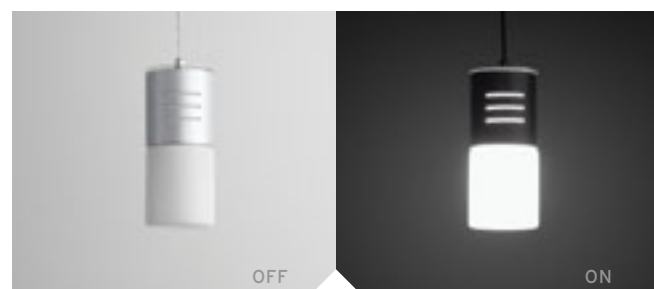

# FIREFLY

pendant



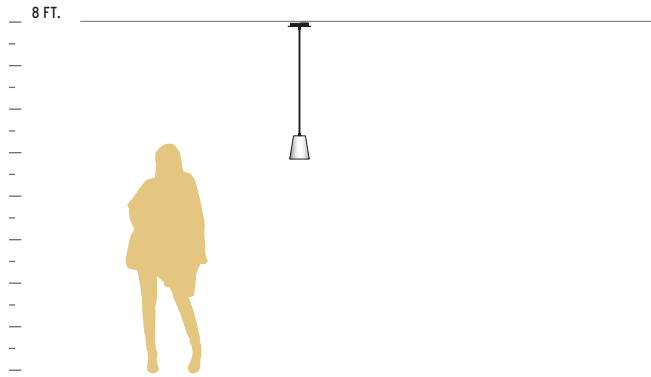

Review available options to format  
your Oxygen part number.

**2-6158-XXX**  
DIFFUSER FINISH

### 2-6158-XXX FIREFLY / FLUORESCENT


DIFFUSER	1 Clear outer glass with frosted inner cone
FINISH	14 Polished Chrome
LAMPING	1 x 40W G16 incandescent (candelabra)
DIMENSIONS	5"(w) x 6"(h)

#### GENERAL SPECIFICATIONS:

- Cold rolled steel canopy.
- U.L. and C.U.L. approved for damp locations.
- Unit mounts to standard 4" octagonal junction box.
- 8' cord provided.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.




**FIREFLY**  
pendant  
PENDANTS

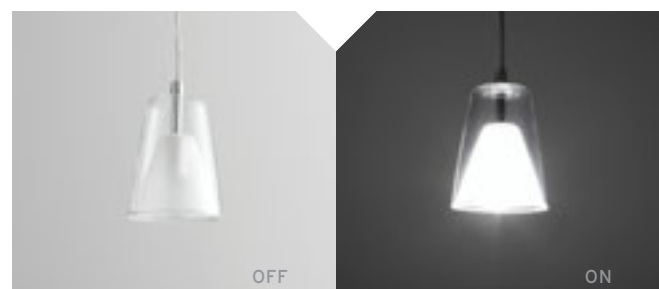





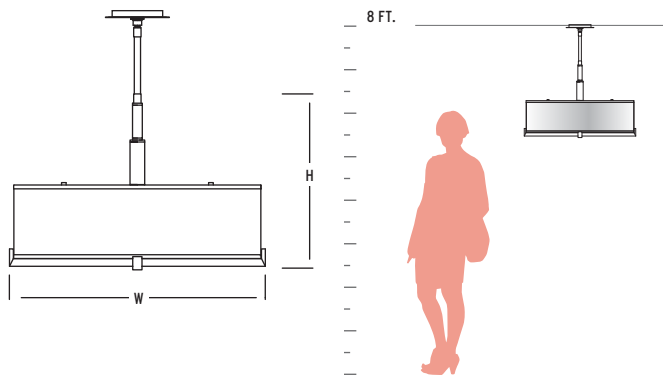

Review available options to format your Oxygen part number.

**2-6209-XX**  
FINISH

### 2-6209-22 INA / FLUORESCENT

DIFFUSER	Acrylic With Natural Grass Shade
FINISH	<b>22</b> Oiled Bronze
LAMPING	4x23W (GU24) (lamps included)
DIMENSIONS	26.25"(w) x 18"(h)

### 2-6209-24 INA / FLUORESCENT

DIFFUSER	Acrylic With White Grass Shade
FINISH	<b>24</b> Satin Nickel
LAMPING	4x23W (GU24) (lamps included)
DIMENSIONS	26.25"(w) x 18"(h)

#### GENERAL SPECIFICATIONS:

- Cold rolled Steel Canopy.
- Formed steel trim/frame.
- Grass shades are natural bamboo fibers.
- U.L and C.U.L. approved for Dry locations.
- 23w, 2700k, 120V self-ballasted GU24 lamps included.
- Acrylic diffuser.
- Height measured without stem.
- Stem is custom cut at oxygen facility to customer's specification.
- Toolless lamp access.
- Canopy swivel allows for mounting on sloped ceilings - up to 30-degrees.
- Unit mounts to 4" octagonal junction box.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



**2-6209-22**




**2-6209-24**

INA  
pendant

PENDANTS



# INA pendant

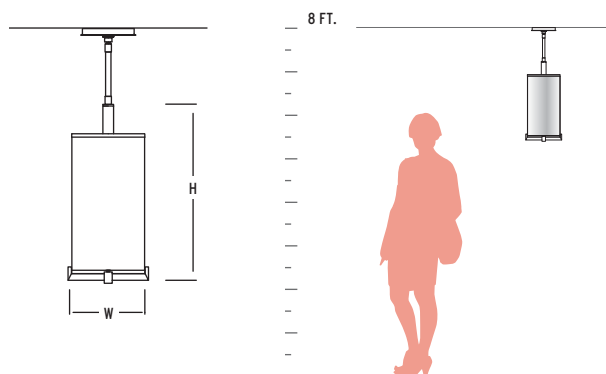

Review available options to format your Oxygen part number.

**2-6208-XX**  
FINISH

## 2-6208-22 INA / FLUORESCENT

DIFFUSER	Acrylic With Natural Grass Shade
FINISH	<b>22</b> Oiled Bronze
LAMPING	1x23W (GU24) (lamp included)
DIMENSIONS	9.5"(w) x 24"(h)

## 2-6208-24 INA / FLUORESCENT

DIFFUSER	Acrylic With White Grass Shade
FINISH	<b>24</b> Satin Nickel
LAMPING	1x23W (GU24) (lamp included)
DIMENSIONS	9.5"(w) x 24"(h)

### GENERAL SPECIFICATIONS:


- Cold rolled Steel Canopy.
- Formed steel trim/frame.
- Grass shades are natural bamboo fibers.
- U.L and C.U.L. approved for Dry locations.
- 23w, 2700k, 120V self-ballasted GU24 lamp included.
- Acrylic diffuser.
- Height measured without stem.
- Stem is custom cut at oxygen facility to customer's specification.
- Toolless lamp access.
- Canopy swivel allows for mounting on sloped ceilings - up to 30-degrees.
- Unit mounts to 4" octagonal junction box.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



**2-6208-22**



**2-6208-24**

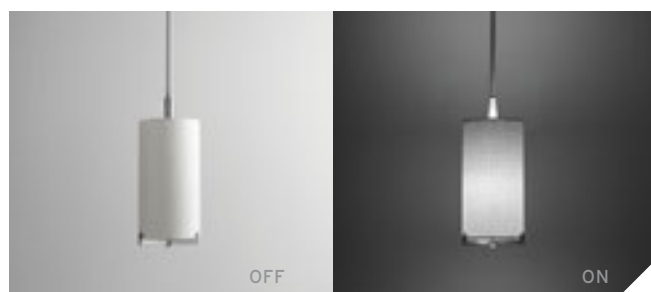

OFF

ON



INA  
pendant

PENDANTS






# LOTUS

pendant



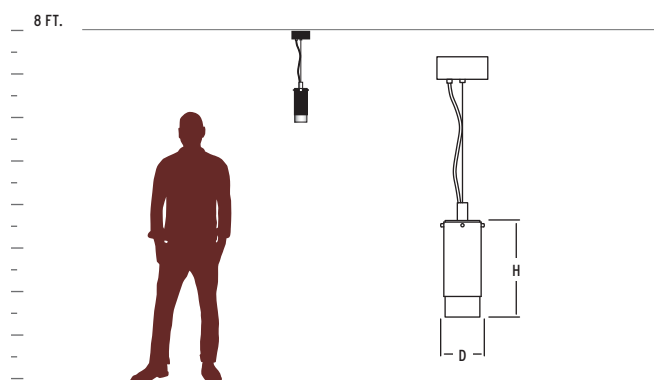

Review available options to format  
your Oxygen part number.

**2-6107-XX**  
FINISH

**2-6107-XX** LOTUS / FLUORESCENT

DIFFUSER	White Opal Glass
FINISH	<b>24</b> Satin Nickel
LAMPING	1 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	3.25"(h) x 9.5"(dia)
OPTIONS	Perforated Sleeve (included)


**GENERAL SPECIFICATIONS:**

- Formed steel canopy.
- Cold rolled steel housing.
- Satin white duplex glass diffuser is 3/16" thick.
- Optional perforated sleeve included.
- Perforated metal overlay in natural steel finish only.
- All items U.L and C.U.L. approved for dry locations.
- Fluorescent ballasts are electronic, HPF, instant start, 120V.
- All units mount to standard 4" octagonal junction box.
- To avoid possible abnormal end of life, use lamps with integral End of Life protection.
- 8' cord provided.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



pendant  
**LOTUS**

PENDANTS

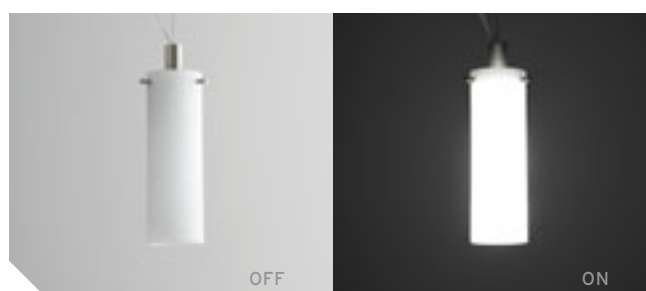


# ORACLE

pendant



2-6210-14

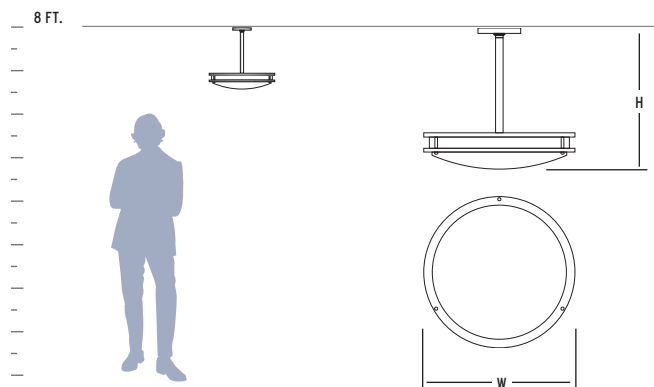

Review available options to format  
your Oxygen part number.

**2-6210-XX**  
FINISH

### 2-6210-XX ORACLE / FLUORESCENT

DIFFUSER	Matte White Acrylic
FINISH	<b>14</b> Polished Chrome, <b>24</b> Satin Nickel
LAMPING	2x26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	17.75"(w) x 18.25"(h)

#### GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Formed steel trim.
- White acrylic diffuser is 1/16" thick.
- U.L. and C.U.L. approved for damp locations.
- Fluorescent ballasts are electronic, HPF, programmed start, universal voltage (120V-277V).
- Spun steel canopy with 30° swivel.
- Stem is 12".
- Unit mounts to 4" octagonal junction box.
- Toolless access to lamp.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



ORACLE  
pendant

PENDANTS

2-6210-24





OUTDOOR





# OUTDOOR

visual index

OUTDOOR



Celena

158



Deva

160



Eclipse

162



Regio

170



Telshor

172

ADA



Celena

158



Deva

160




Indu

164



Indu

164

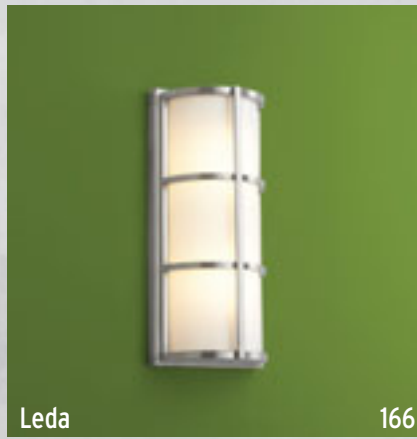

Leda

166




Neoma

168

OUTDOOR

OUTDOOR

# CELENA sconce

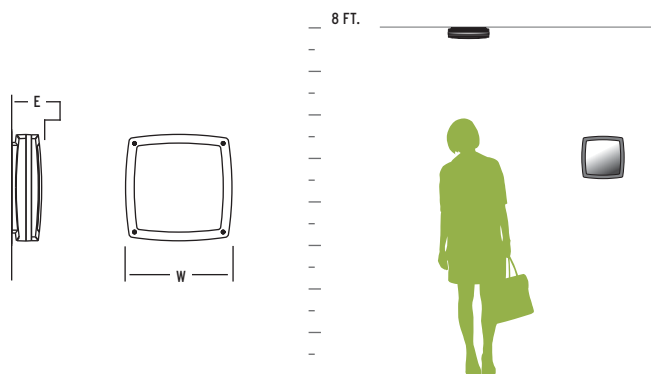

Review available options to format  
your Oxygen part number.



**2-705-XX**  
FINISH

## **2-705-XX** CELENA / FLUORESCENT

DIFFUSER	Polished White Polycarbonate
FINISH	<b>6</b> White, <b>15</b> Black, <b>16</b> Gray
LAMPING	2 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	11.75"(w) x 3.5"(ext)

### GENERAL SPECIFICATIONS:

- Cast aluminum housing
- Injected molded polycarbonate diffuser.
- Captive, stainless steel, tamper resistant hardware.
- Vandal resistant construction.
- U.L. and C.U.L. approved for wet locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Approved for wall or ceiling mount applications.
- ADA compliant.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

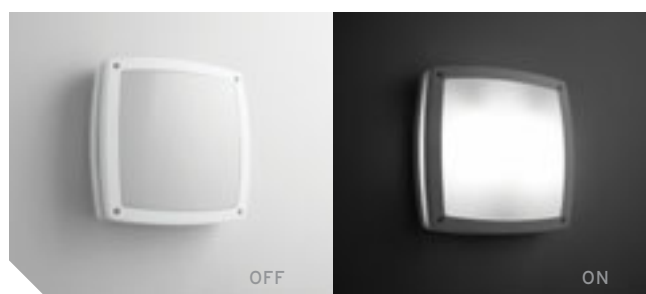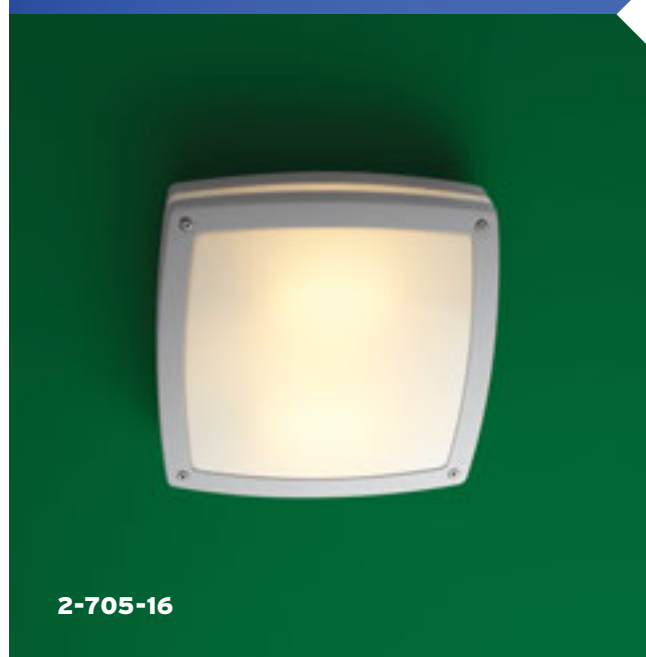






CELENA<sup>sconce</sup>

OUTDOOR

ADA



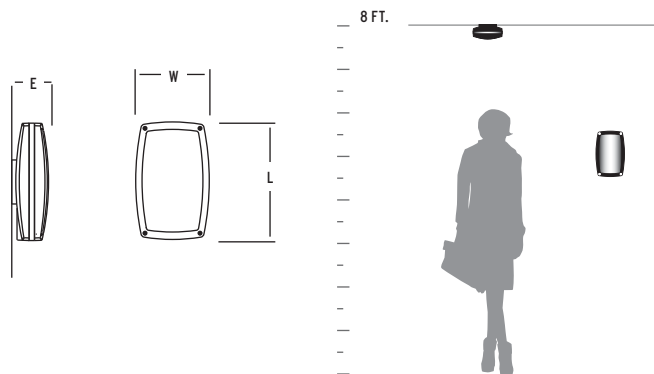

Review available options to format  
your Oxygen part number.


**2-706-XX**  
FINISH

### 2-706-XX DEVA / FLUORESCENT

DIFFUSER	Polished White Polycarbonate
FINISH	<b>6</b> White, <b>15</b> Black, <b>16</b> Gray
LAMPING	2 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	12.5"(l) x 7.75"(w) x 4"(ext)

#### GENERAL SPECIFICATIONS:

- Cast aluminum housing
- Injected molded polycarbonate diffuser.
- Captive, stainless steel, tamper resistant hardware.
- Vandal resistant construction.
- U.L. and C.U.L. approved for wet locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Approved for wall or ceiling mount applications.
- ADA compliant.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

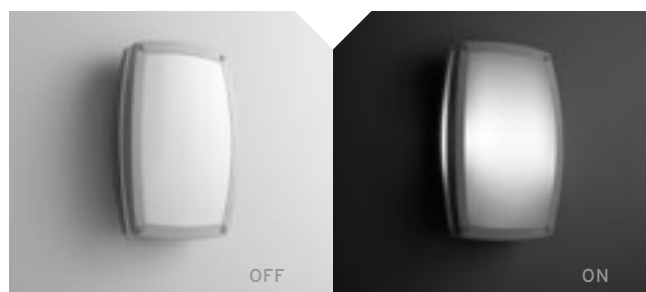

DEVA  
sconce

OUTDOOR

ADA




# ECLIPSE

sconce



2-704-6



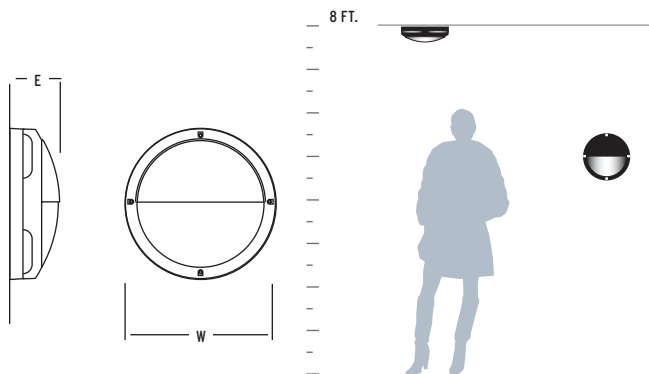

Review available options to format  
your Oxygen part number.

**2-704-XX**  
FINISH

**2-704-XX** ECLIPSE / FLUORESCENT


DIFFUSER	Polished White Polycarbonate
FINISH	<b>6</b> White, <b>15</b> Black, <b>16</b> Gray
LAMPING	2 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	13"(w) x 4.25"(ext)


**GENERAL SPECIFICATIONS:**

- Cast aluminum housing
- Injected molded polycarbonate diffuser.
- Captive, stainless steel, tamper resistant hardware.
- Vandal resistant construction.
- U.L. and C.U.L. approved for wet locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Approved for wall or ceiling mount applications.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



ECLIPSE  
scone  
OUTDOOR

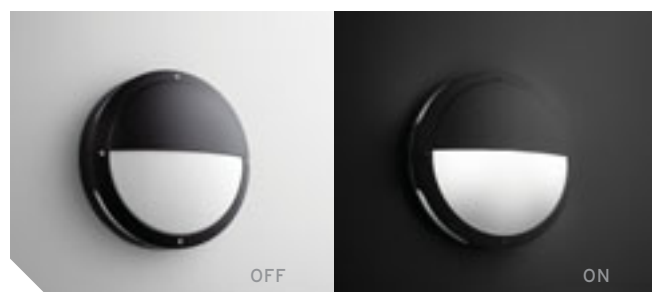

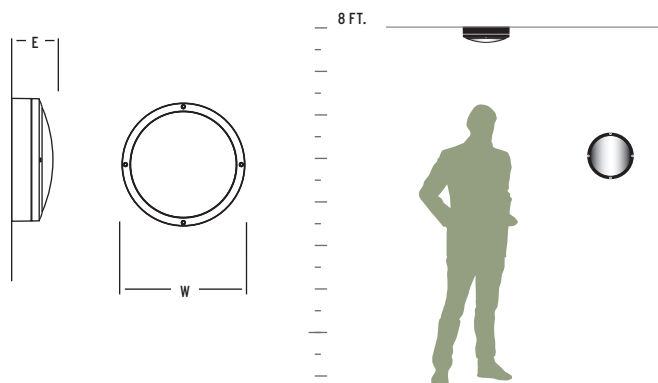

Review available options to format your Oxygen part number.

**2-708-XX**  
FINISH

## 2-708-XX INDU / FLUORESCENT

DIFFUSER	Polished White Polycarbonate
FINISH	<b>6</b> White, <b>15</b> Black, <b>16</b> Gray
LAMPING	2 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	10.5"(w) x 3.5"(ext)

### GENERAL SPECIFICATIONS:

- Cast aluminum housing
- Injected molded polycarbonate diffuser.
- Captive, stainless steel, tamper resistant hardware.
- Vandal resistant construction.
- U.L. and C.U.L. approved for wet locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Approved for wall or ceiling mount applications.
- ADA compliant.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



**2-708-16**



**2-708-6**



OFF

ON



INDU scone

OUTDOOR

ADA



2-708-15

LEDA sponse



2-713-224



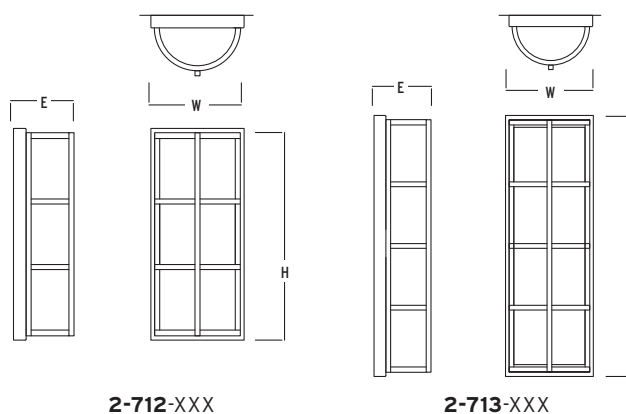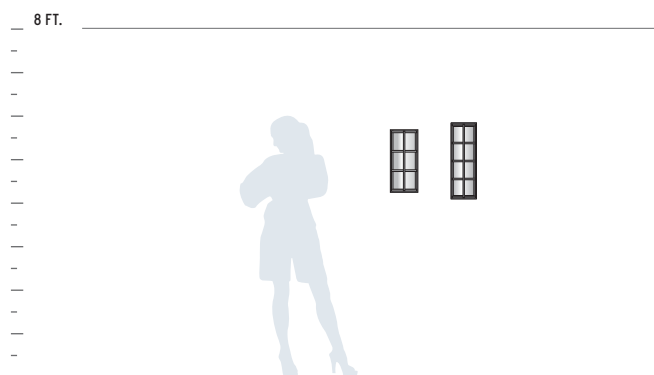

Review available options to format  
your Oxygen part number.

**2-712-XXX**  
DIFFUSER FINISH

### 2-712-XXX LEDA / FLUORESCENT / SMALL

DIFFUSER	2 Matte White Acrylic
FINISH	24 Satin Nickel
LAMPING	2 x 13W quad 4-pin fluoresecent (G24q-1)
DIMENSIONS	7.25"(w) x 16.5"(h) x 4.75"(ext)

### 2-713-XXX LEDA / FLUORESCENT / LARGE

DIFFUSER	2 Matte White Acrylic
FINISH	24 Satin Nickel
LAMPING	2 x 26W quad 4-pin fluoresecent (G24q-3)
DIMENSIONS	7.25"(w) x 21.75"(h) x 4.75"(ext)

#### GENERAL SPECIFICATIONS:

- Stainless steel housing.
- White acrylic diffuser is extruded 1/8" thick.
- U.L. and C.U.L. approved for wet locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Approved for vertical mounting only.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.




LEDA  
scone  
OUTDOOR



# NEOMA

sconce

2-707-15

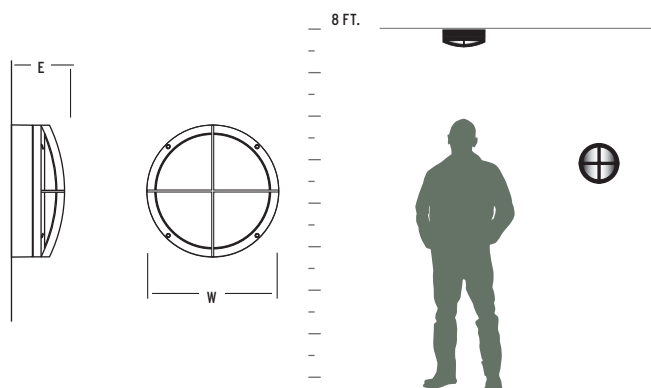

Review available options to format your Oxygen part number.

**2-707-XX**  
FINISH


**2-707-XX** NEOMA / FLUORESCENT

DIFFUSER	Polished White Polycarbonate
FINISH	<b>6</b> White, <b>15</b> Black, <b>16</b> Gray
LAMPING	2 x 13W quad 4-pin cfl (G24q-1)
DIMENSIONS	10.5"(w) x 4.25"(e)

#### GENERAL SPECIFICATIONS:

- Cast aluminum housing
- Injected molded polycarbonate diffuser.
- Captive, stainless steel, tamper resistant hardware.
- Vandal resistant construction.
- U.L. and C.U.L. approved for wet locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Approved for wall or ceiling mount applications.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



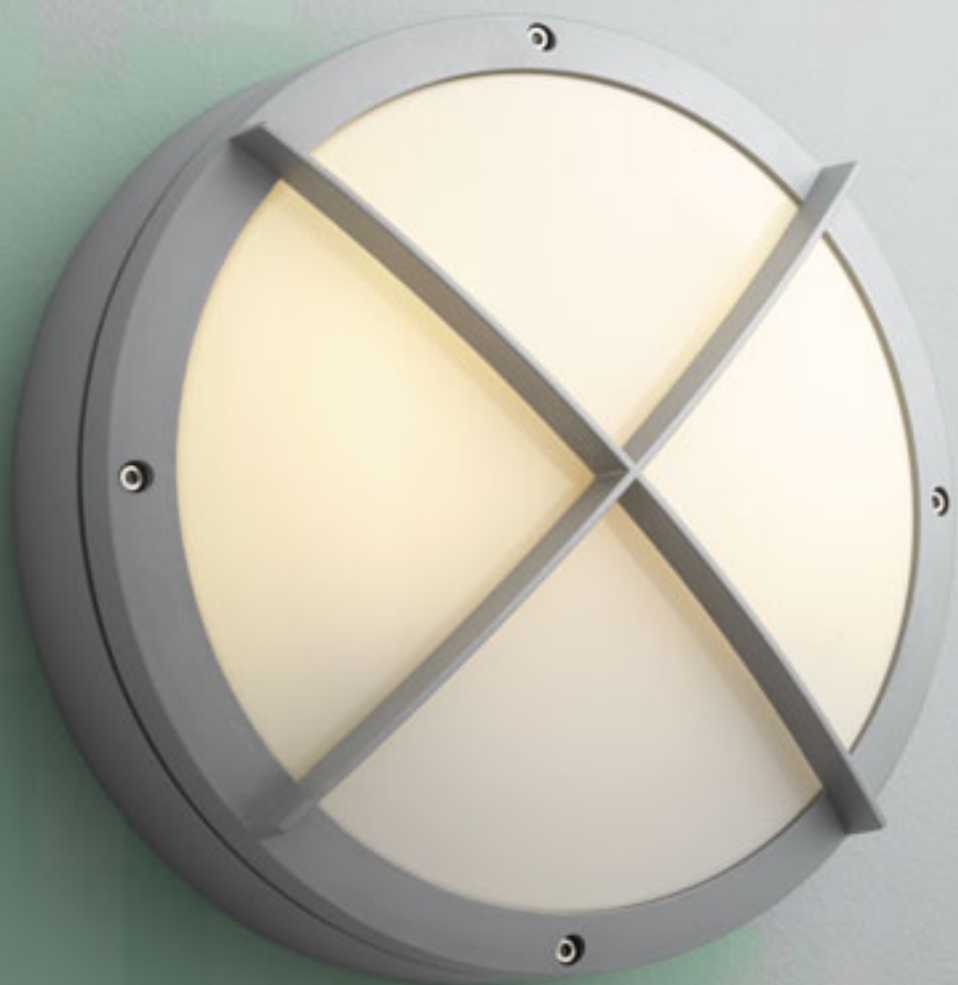


2-707-16

NEOMA<sup>sconce</sup>

OUTDOOR




2-707-6

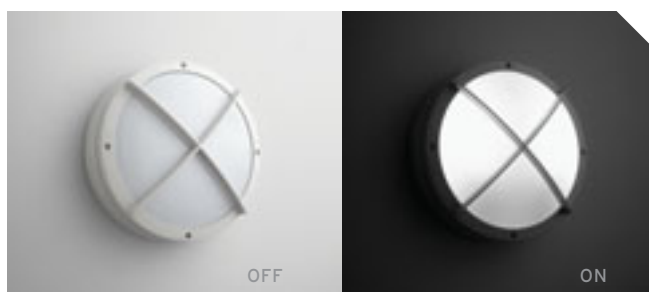



# REGIO sconce

2-709-15

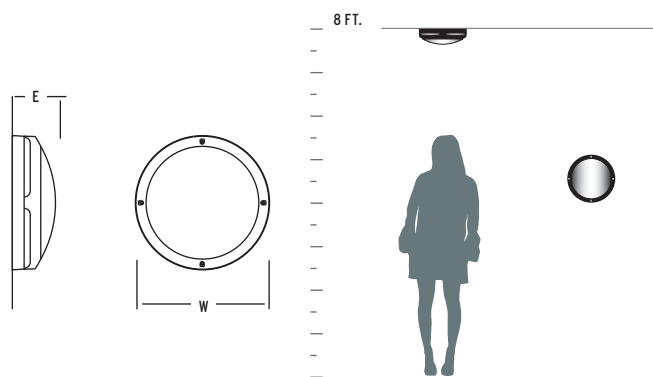

Review available options to format  
your Oxygen part number.

**2-709-XX**  
FINISH

## 2-709-XX REGIO / FLUORESCENT

DIFFUSER	Polished White Polycarbonate
FINISH	<b>6</b> White, <b>15</b> Black, <b>16</b> Gray
LAMPING	2 x 18W quad 4-pin fluorescent (G24q-2)
DIMENSIONS	13"(w) x 4.25"(ext)

### GENERAL SPECIFICATIONS:

- Cast aluminum housing
- Injected molded polycarbonate diffuser.
- Captive, stainless steel, tamper resistant hardware.
- Vandal resistant construction.
- U.L. and C.U.L. approved for wet locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Approved for wall or ceiling mount applications.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.







2-709-16





2-709-6

REGIO  
sconce

OUTDOOR

# TELSHOR sconce

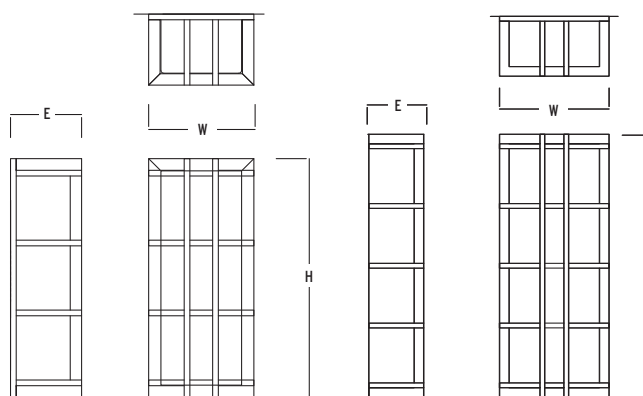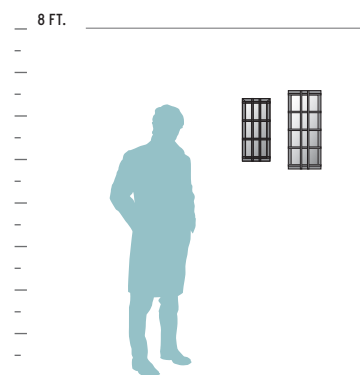

2-710-XXX

2-711-XXX

Review available options to format  
your oxygen part number.

**2-710-XXX**  
DIFFUSER FINISH

## 2-710-XXX TELSHOR / FLUORESCENT / SMALL

DIFFUSER	2 White Matte Acrylic
FINISH	24 Satin nickel
LAMPING	2 x 13W quad 4-pin fluorescent (G24q-1)
DIMENSIONS	7.25"(w) x 16.5"(h) x 5"(ext)

## 2-711-XXX TELSHOR / FLUORESCENT / LARGE

DIFFUSER	2 White Matte Acrylic
FINISH	24 Satin nickel
LAMPING	2 x 26W quad 4-pin fluorescent (G24q-3)
DIMENSIONS	9"(w) x 21.75"(h) x 5"(ext)

### GENERAL SPECIFICATIONS:

- Stainless steel housing.
- White acrylic diffuser is formed 1/8" thick.
- U.L. and C.U.L. approved for wet locations.
- Fluorescent ballast is electronic, HPF, programmed start, universal voltage (120V to 277V).
- Unit mounts to 4" octagonal junction box.
- Approved for vertical mounting only.
- Visit [www.oxygenlighting.com](http://www.oxygenlighting.com) for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



2-710-224



OFF

ON



# TELSHOR<sup>sconce</sup>

OUTDOOR

2-711-224

# EMERGENCY J-BOX

for wall and ceiling mount applications







## 2-7001

DIMENSIONS | 4.25" (h) x 2.5" (d) x 3.5" (w)

### GENERAL SPECIFICATIONS:

- Junction box for use with common fluorescent and emergency ballasts
- J-box can be used with other manufacturers fixtures
- Emergency ballast mounts directly to junction box
- Meets NFPA Fire Safety requirements
- Conforms to UL514A and CSA C22.2#18.1 requirements
- ETL listed for damp locations
- Ballast not included
- Suitable for fixtures weighing up to 20 pounds
- New construction only.

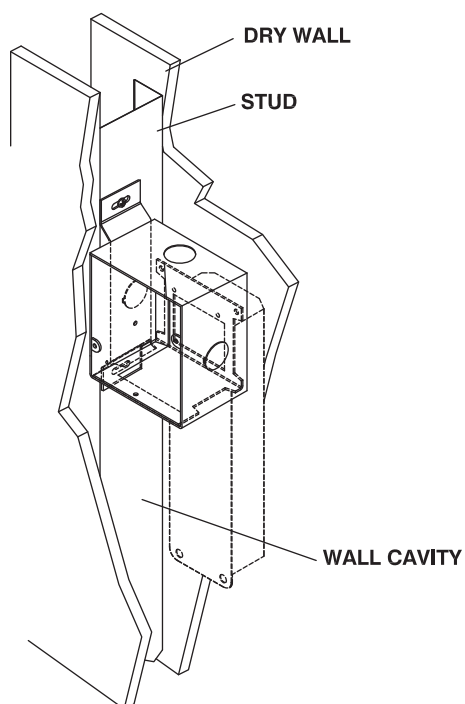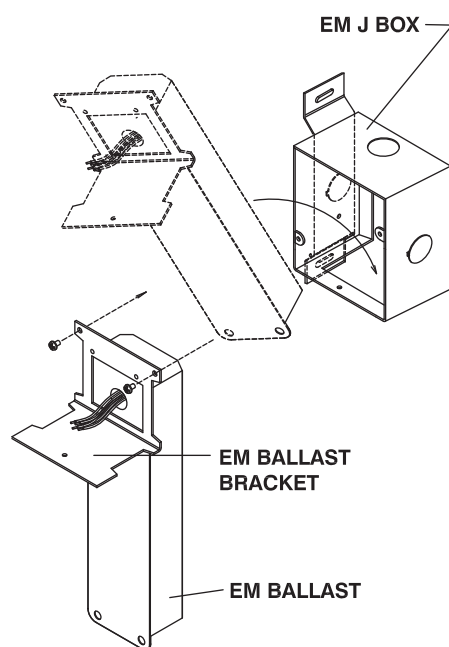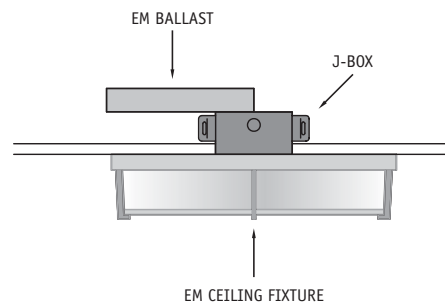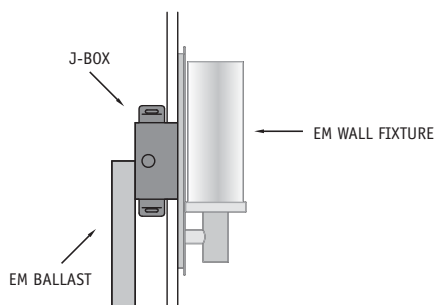





6 - white



14 - polished chrome




15 - black

**FINISHES**



16 - gray

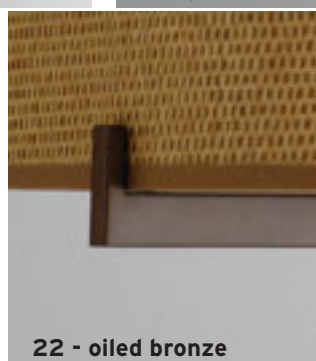

22 - oiled bronze



24 - satin nickel




95 - old world



white opal glass



matte white acrylic

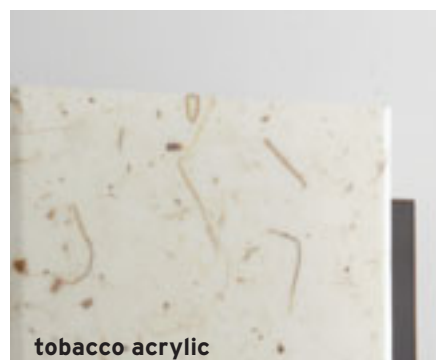

tobacco acrylic

**DIFFUSERS**




faux onyx acrylic



silver cloth acrylic



wave pattern acrylic

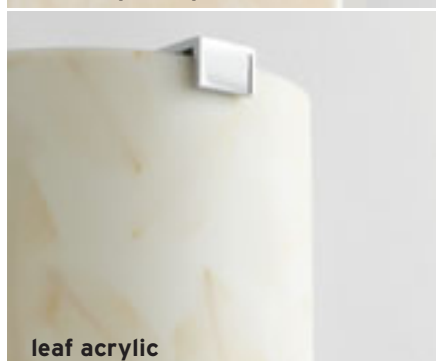

leaf acrylic



natural grass



white grass

**ACCESSORIES & OPTIONS**

# INDEX

item # . . . . . pg #	item # . . . . . pg #	item # . . . . . pg #	item # . . . . . pg #
2-572-114 . . . . . 45	2-586-214 . . . . . 76	2-711-224 . . . . . 172	2-5117-395 . . . . . 39
2-572-124 . . . . . 45	2-586-224 . . . . . 76	2-712-224 . . . . . 167	2-5117-414 . . . . . 39
2-572-195 . . . . . 45	2-587-214 . . . . . 75	2-713-224 . . . . . 167	2-5117-424 . . . . . 39
2-572-914 . . . . . 45	2-587-224 . . . . . 75	2-5104-14 . . . . . 64	2-5117-495 . . . . . 39
2-572-924 . . . . . 45	2-597-124 . . . . . 19	2-5104-24 . . . . . 64	2-5117-614 . . . . . 39
2-572-995 . . . . . 45	2-597-195 . . . . . 19	2-5105-14 . . . . . 64	2-5117-624 . . . . . 39
2-573-114 . . . . . 45	2-597-224 . . . . . 19	2-5105-24 . . . . . 64	2-5117-695 . . . . . 39
2-573-124 . . . . . 45	2-597-295 . . . . . 19	2-5106-14 . . . . . 64	2-5117-714 . . . . . 39
2-573-195 . . . . . 45	2-597-524 . . . . . 19	2-5106-24 . . . . . 64	2-5117-724 . . . . . 39
2-573-914 . . . . . 45	2-597-595 . . . . . 19	2-5107-14 . . . . . 17	2-5117-795 . . . . . 39
2-573-924 . . . . . 45	2-692-224 . . . . . 107	2-5107-24 . . . . . 17	2-5117-814 . . . . . 39
2-573-995 . . . . . 45	2-693-224 . . . . . 107	2-5112-24 . . . . . 47	2-5117-824 . . . . . 39
2-575-124 . . . . . 51	2-694-224 . . . . . 107	2-5112-24-EM . . . . . 47	2-5117-895 . . . . . 39
2-579-114 . . . . . 53	2-697-214 . . . . . 128	2-5113-214 . . . . . 39	2-5118-214-EM . . . . . 39
2-579-124 . . . . . 53	2-697-224 . . . . . 128	2-5113-224 . . . . . 39	2-5118-224-EM . . . . . 39
2-579-214 . . . . . 53	2-698-24 . . . . . 100	2-5113-295 . . . . . 39	2-5118-295-EM . . . . . 39
2-579-224 . . . . . 53	2-699-24 . . . . . 102	2-5113-314 . . . . . 39	2-5118-314-EM . . . . . 39
2-579-314 . . . . . 53	2-704-6 . . . . . 163	2-5113-324 . . . . . 39	2-5118-324-EM . . . . . 39
2-579-324 . . . . . 53	2-704-15 . . . . . 163	2-5113-395 . . . . . 39	2-5118-395-EM . . . . . 39
2-579-414 . . . . . 53	2-704-16 . . . . . 163	2-5113-414 . . . . . 39	2-5118-414-EM . . . . . 39
2-579-424 . . . . . 53	2-705-6 . . . . . 158	2-5113-424 . . . . . 39	2-5118-424-EM . . . . . 39
2-579-614 . . . . . 53	2-705-15 . . . . . 158	2-5113-495 . . . . . 39	2-5118-495-EM . . . . . 39
2-579-624 . . . . . 53	2-705-16 . . . . . 158	2-5113-614 . . . . . 39	2-5118-614-EM . . . . . 39
2-579-714 . . . . . 53	2-706-6 . . . . . 161	2-5113-624 . . . . . 39	2-5118-624-EM . . . . . 39
2-579-724 . . . . . 53	2-706-15 . . . . . 161	2-5113-695 . . . . . 39	2-5118-695-EM . . . . . 39
2-579-814 . . . . . 53	2-706-16 . . . . . 161	2-5113-714 . . . . . 39	2-5118-714-EM . . . . . 39
2-579-824 . . . . . 53	2-707-6 . . . . . 168	2-5113-724 . . . . . 39	2-5118-724-EM . . . . . 39
2-580-124 . . . . . 53	2-707-15 . . . . . 168	2-5113-795 . . . . . 39	2-5118-795-EM . . . . . 39
2-582-214 . . . . . 76	2-707-16 . . . . . 168	2-5113-814 . . . . . 39	2-5118-814-EM . . . . . 39
2-582-224 . . . . . 76	2-708-6 . . . . . 164	2-5113-824 . . . . . 39	2-5118-824-EM . . . . . 39
2-583-214 . . . . . 75	2-708-15 . . . . . 164	2-5113-895 . . . . . 39	2-5118-895-EM . . . . . 39
2-583-224 . . . . . 75	2-708-16 . . . . . 164	2-5117-214 . . . . . 39	2-5121-114 . . . . . 81
2-584-214 . . . . . 76	2-709-6 . . . . . 170	2-5117-224 . . . . . 39	2-5121-124 . . . . . 81
2-584-224 . . . . . 76	2-709-15 . . . . . 170	2-5117-295 . . . . . 39	2-5121-314 . . . . . 81
2-585-214 . . . . . 75	2-709-16 . . . . . 170	2-5117-314 . . . . . 39	2-5121-324 . . . . . 81
2-585-224 . . . . . 75	2-710-224 . . . . . 172	2-5117-324 . . . . . 39	2-5121-914 . . . . . 81

item # . . . . . pg #	item # . . . . . pg #	item # . . . . . pg #	item # . . . . . pg #
2-5121-924 . . . . . 81	2-5141-24 . . . . . 84	2-5155-124 . . . . . 78	2-5177-14 . . . . . 66
2-5122-114 . . . . . 81	2-5142-14 . . . . . 84	2-5155-914 . . . . . 78	2-5177-24 . . . . . 66
2-5122-124 . . . . . 81	2-5142-24 . . . . . 84	2-5155-924 . . . . . 78	2-5178-14 . . . . . 66
2-5122-314 . . . . . 81	2-5145-114 . . . . . 21	2-5156-114 . . . . . 43	2-5178-24 . . . . . 66
2-5122-324 . . . . . 81	2-5145-124 . . . . . 21	2-5156-124 . . . . . 43	2-5179-124 . . . . . 51
2-5122-914 . . . . . 81	2-5145-214 . . . . . 21	2-5156-914 . . . . . 43	2-5181-14 . . . . . 35
2-5122-924 . . . . . 81	2-5145-224 . . . . . 21	2-5156-924 . . . . . 43	2-5181-24 . . . . . 35
2-5124-114 . . . . . 45	2-5145-514 . . . . . 21	2-5157-114 . . . . . 25	2-5182-24 . . . . . 57
2-5124-124 . . . . . 45	2-5145-524 . . . . . 21	2-5158-114 . . . . . 25	2-5898-14 . . . . . 55
2-5124-195 . . . . . 45	2-5146-114 . . . . . 23	2-5159-124 . . . . . 27	2-5898-24 . . . . . 55
2-5124-314 . . . . . 45	2-5146-124 . . . . . 23	2-5160-124 . . . . . 27	2-6107-24 . . . . . 151
2-5124-324 . . . . . 45	2-5146-214 . . . . . 23	2-5161-114 . . . . . 21	2-6109-14 . . . . . 111
2-5124-395 . . . . . 45	2-5146-224 . . . . . 23	2-5161-124 . . . . . 21	2-6109-24 . . . . . 111
2-5124-914 . . . . . 45	2-5146-514 . . . . . 23	2-5163-14 . . . . . 59	2-6110-14 . . . . . 111
2-5124-924 . . . . . 45	2-5146-524 . . . . . 23	2-5163-24 . . . . . 59	2-6110-24 . . . . . 111
2-5124-995 . . . . . 45	2-5153-114 . . . . . 51	2-5164-24 . . . . . 61	2-6111-14 . . . . . 110
2-5126-114 . . . . . 23	2-5153-124 . . . . . 51	2-5165-224 . . . . . 30	2-6111-24 . . . . . 110
2-5126-124 . . . . . 23	2-5153-214 . . . . . 51	2-5166-224 . . . . . 15	2-6112-14 . . . . . 114
2-5127-14 . . . . . 35	2-5153-224 . . . . . 51	2-5167-14 . . . . . 87	2-6112-24 . . . . . 114
2-5127-24 . . . . . 35	2-5153-314 . . . . . 51	2-5167-24 . . . . . 87	2-6113-24 . . . . . 120
2-5131-14 . . . . . 83	2-5153-324 . . . . . 51	2-5169-14 . . . . . 87	2-6114-14 . . . . . 105
2-5131-24 . . . . . 83	2-5153-414 . . . . . 51	2-5169-24 . . . . . 87	2-6114-24 . . . . . 105
2-5132-14 . . . . . 83	2-5153-424 . . . . . 51	2-5170-224 . . . . . 63	2-6134-24 . . . . . 105
2-5132-24 . . . . . 83	2-5153-614 . . . . . 51	2-5171-14 . . . . . 59	2-6135-24 . . . . . 105
2-5133-14 . . . . . 83	2-5153-624 . . . . . 51	2-5171-24 . . . . . 59	2-6136-24 . . . . . 104
2-5133-24 . . . . . 83	2-5153-714 . . . . . 51	2-5172-24 . . . . . 61	2-6138-6 . . . . . 122
2-5134-24 . . . . . 73	2-5153-724 . . . . . 51	2-5173-114 . . . . . 45	2-6139-6 . . . . . 122
2-5137-24 . . . . . 69	2-5153-814 . . . . . 51	2-5173-124 . . . . . 45	2-6142-24 . . . . . 112
2-5137-24-BP224 . . . 71	2-5153-824 . . . . . 51	2-5174-114 . . . . . 81	2-6142-24-EM . . . . . 112
2-5138-24 . . . . . 69	2-5154-114 . . . . . 32	2-5174-124 . . . . . 81	2-6143-24 . . . . . 112
2-5138-24-BP324 . . . 71	2-5154-124 . . . . . 32	2-5174-914 . . . . . 81	2-6143-24-EM . . . . . 112
2-5139-24 . . . . . 69	2-5154-214 . . . . . 32	2-5174-924 . . . . . 81	2-6157-116 . . . . . 143
2-5139-24-BP424 . . . 71	2-5154-224 . . . . . 32	2-5175-14 . . . . . 17	2-6158-114 . . . . . 145
2-5140-14 . . . . . 84	2-5154-514 . . . . . 32	2-5175-24 . . . . . 17	2-6160-124 . . . . . 134
2-5140-24 . . . . . 84	2-5154-524 . . . . . 32	2-5176-14 . . . . . 66	2-6161-124 . . . . . 134
2-5141-14 . . . . . 84	2-5155-114 . . . . . 78	2-5176-24 . . . . . 66	2-6164-124 . . . . . 29, 95

# INDEX

item # . . . . . pg #	item # . . . . . pg #	item # . . . . . pg #	item # . . . . . pg #
2-6165-124. . . . . 29, 95	2-6187-114 . . . . . 127	3-5113-224. . . . . 39	3-6035-24. . . . . 105
2-6166-206. . . . . 118	2-6187-114-EM. . . . . 127	3-5113-295. . . . . 39	3-6110-14 . . . . . 111
2-6166-216. . . . . 118	2-6187-124. . . . . 127	3-5113-314 . . . . . 39	3-6110-24. . . . . 111
2-6166-295 . . . . . 118	2-6187-124-EM. . . . . 127	3-5113-324. . . . . 39	3-6135-24 . . . . . 105
2-6167-206 . . . . . 118	2-6187-214. . . . . 127	3-5113-395. . . . . 39	
2-6167-216. . . . . 118	2-6187-214-EM . . . . . 127	3-5113-414 . . . . . 39	
2-6167-295 . . . . . 118	2-6187-224 . . . . . 127	3-5113-424. . . . . 39	
2-6168-206. . . . . 119	2-6187-224-EM . . . . . 127	3-5113-495 . . . . . 39	
2-6168-216 . . . . . 119	2-6188-114. . . . . 124	3-5113-614 . . . . . 39	
2-6168-295 . . . . . 119	2-6188-124. . . . . 124	3-5113-624. . . . . 39	
2-6169-224 . . . . . 97	2-6189-114 . . . . . 124	3-5113-695 . . . . . 39	
2-6171-224. . . . . 93	2-6189-114-EM. . . . . 125	3-5113-714 . . . . . 39	
2-6173-14. . . . . 111	2-6189-124. . . . . 124	3-5113-724. . . . . 39	
2-6173-24. . . . . 111	2-6189-124-EM . . . . . 125	3-5113-795. . . . . 39	
2-6174-14 . . . . . 111	2-6189-214 . . . . . 124	3-5113-814 . . . . . 39	
2-6174-24. . . . . 111	2-6189-214-EM . . . . . 125	3-5113-824. . . . . 39	
2-6175-14. . . . . 110	2-6189-224 . . . . . 124	3-5113-895 . . . . . 39	
2-6175-24 . . . . . 110	2-6189-224-EM. . . . . 125	3-5126-114 . . . . . 23	
2-6176-14. . . . . 114	2-6205-22. . . . . 141	3-5126-124. . . . . 23	
2-6176-24. . . . . 114	2-6205-24. . . . . 141	3-5134-24 . . . . . 73	
2-6177-24. . . . . 112	2-6206-22. . . . . 139	3-5153-114 . . . . . 51	
2-6177-24-EM . . . . . 112	2-6206-24. . . . . 139	3-5153-124. . . . . 51	
2-6178-24 . . . . . 112	2-6207-22 . . . . . 137	3-5153-214. . . . . 51	
2-6178-24-EM . . . . . 112	2-6207-24 . . . . . 137	3-5153-224 . . . . . 51	
2-6182-206 . . . . . 118	2-6208-22. . . . . 148	3-5153-314. . . . . 51	
2-6182-216. . . . . 118	2-6208-24. . . . . 148	3-5153-324 . . . . . 51	
2-6182-295 . . . . . 118	2-6209-22. . . . . 147	3-5153-414 . . . . . 51	
2-6183-206 . . . . . 118	2-6209-24. . . . . 147	3-5153-424 . . . . . 51	
2-6183-216. . . . . 118	2-6210-14. . . . . 153	3-5153-614 . . . . . 51	
2-6183-295 . . . . . 118	2-6210-24 . . . . . 153	3-5153-624 . . . . . 51	
2-6184-22 . . . . . 98	2-7001 . . . . . 174	3-5153-714. . . . . 51	
2-6184-24 . . . . . 98	3-579-114. . . . . 53	3-5153-724 . . . . . 51	
2-6185-22 . . . . . 99	3-579-124 . . . . . 53	3-5153-814 . . . . . 51	
2-6185-24 . . . . . 99	3-5107-14. . . . . 17	3-5153-824 . . . . . 51	
2-6186-114. . . . . 127	3-5107-24 . . . . . 17	3-6010-14 . . . . . 111	
2-6186-124. . . . . 127	3-5113-214 . . . . . 39	3-6010-24 . . . . . 111	



This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

# 2013-2014 ORDERING INFORMATION

phone: 877.607.0202

fax: 877.607.0203

email: [customersupport@oxygenlighting.com](mailto:customersupport@oxygenlighting.com)

## HOW TO ORDER

Orders are placed with authorized Oxygen sales representatives.

## WAREHOUSE/ORDERING HOURS

Warehouse operations are open from 8:00am - 5:30pm Central Standard Time Monday through Friday.

## CREDIT APPROVAL

For new accounts, a completed and signed Oxygen credit application must be in our possession before credit verification can begin. We use the services of Dun & Bradstreet and other credit reporting companies for credit analysis. We report delinquent accounts to those companies. We fill orders only after credit approval. Orders for past due accounts are not shipped until the account status is current.

## FREIGHT CLAIMS

We assure that products are in good condition prior to packing and shipping. We are not responsible for shipments after they leave our warehouse. The carrier signs for acceptance at that time. Customers must examine all arriving shipments for evidence of damage or breakage, and must refuse acceptance or file a claim with the carrier for compensation. UNDER NO CIRCUMSTANCES SHALL OXYGEN BE RESPONSIBLE FOR DAMAGE IN U.S./FED EX SHIPMENTS. All shipments are FOB Oxygen's warehouse in Fort Worth, Tarrant County, Texas.

## PAYMENT TERMS

Specific terms of sale are indicated on all invoices.

## SHIPPING POINT FOR ALL PURPOSES

All shipments are FOB Oxygen's warehouse, In Fort Worth, Tarrant County, Texas.

## SHIPPING METHOD

For orders of \$300 or more: Freight charges for standard LTL commercial delivery or parcel delivery will be equal to 10% of the total order amount. For orders of less than \$300: Freight charges for standard LTL commercial delivery or parcel delivery will be equal to 30% of the total order amount. Please note that we do not have any minimum order restrictions. If you wish to pay the freight charges directly to the carrier, please provide your account number for the carrier of your choice. If payment terms are Open Account, freight charges are billed based upon the value of merchandise that actually ships and the freight charges for backorders or future releases, if any, are billed using the same freight rate as the original order. If payment terms are Prepaid, freight charges for the entire order are billed with the initial shipment or release and back orders or future releases, if any, ship freight prepaid. We contract with LTL freight carriers (such as YRC Freight Lines) for standard commercial delivery only. Residential delivery or accessorial services that you may require from an LTL carrier (such as inside delivery, re-delivery, call for appointment, lift gate request, etc.), will incur freight charges that are in addition to the freight rates stated above. If you advise us that you need such services when you place your order, we will prepay for the services and add them to your invoice. Otherwise, the freight carrier will bill you directly for such additional services. Parcel shipments (such as UPS) will not incur additional freight charges for residential delivery or accessorial services.

## SHORTAGE CLAIMS

Any claim for shortage must be made to us within 3 days of delivery.

## STOCK ITEMS

We list and show products in our catalogs for identification purposes only. In order to improve our products or to comply with code requirements or changes, we reserve the right to alter product design and/or construction without notice.

## RETURNED GOODS

Merchandise Returned for Credit -- must be accompanied by a returned merchandise authorization (RMA) number issued by us within 90 days of our invoice date. Merchandise must be returned, freight prepaid, in its original factory sealed packaging and is subject to a 50% restocking fee. Discontinued, non-standard, modified (CDX-) or unsaleable merchandise will not be accepted as returned goods for credit.

Merchandise Returned Under Warranty for Credit --- must be accompanied by a return merchandise authorization (RMA) number issued by us within the warranty period. In addition, warranty claims made by our dealers on behalf of end users must be accompanied by a copy of the end user's dated proof of purchase as evidence of warranty validity. Merchandise must be returned, freight prepaid, in its original factory packaging. Merchandise that has been modified, or is missing parts, or that is not in its original packaging will be repaired and returned freight prepaid (if the warranty claim is approved). If merchandise cannot be repaired, credit will be issued at the invoiced value, less the value of any missing parts.

Cancellation by Buyer--- No merchandise may be returned for credit or replacement except on written approval by Oxygen. Orders placed with and accepted by Oxygen may not be cancelled except with Oxygen's written consent. Purchase Orders Cancelled more than 5 days after the date of the Acknowledgement / Proforma are subject to a 50% cancellation fee.

## DROP SHIPMENTS

We reserve the right to refuse drop shipment or pick-up orders that are bound for destinations outside the distributor's regular or assigned selling or service area. Drop shipments are subject to additional charges.

## LIMITED WARRANTY


Oxygen (hereafter referred to as the "Company") warrants that our products are free of defects in workmanship and materials. SUCH WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Company will, at our sole option, repair or replace, FOB shipping point, freight prepaid within the Continental U.S., any of our products defective in workmanship or materials. Such repair or replacement is the sole and exclusive remedy against Company and is limited to one (1) year from the date of invoice to the original end user of all lighting and accessory products (except Energy Star lighting products). Company warrants our Energy Star lighting products for three (3) years from the date of the invoice to the original end user. The Company's warranties are not applicable to any lighting product that is not installed and operated in accordance with the National Electric Code (NEC) and Company's product instructions, including, but not limited to, lamping requirements and installation instructions. Consult the warranty included inside each light fixture box for further information. Company does not warrant any product which we promote and sell as "discontinued" or any product which has been altered or repaired outside of our factory or any product which, in our opinion, has been subject to abuse, misuse, negligence, accident or improper installation, maintenance or storage. COMPANY WILL NOT BE RESPONSIBLE FOR ANY COSTS INCURRED IN THE REMOVAL OR REINSTALLATION OF ANY PRODUCT NOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING OUT OF OR IN CONNECTION WITH PRODUCT USE OR PERFORMANCE OR ANY BREACH OF AFOREMENTIONED WARRANTIES.

## HOLIDAY SCHEDULE

In observance of commonly recognized holidays, Quorum International is closed on the following days: New Year's Day, Good Friday, Memorial Day, Independence Day, Labor Day, Thanksgiving, day after Thanksgiving and Christmas Day.

The terms, specifications, conditions and prices contained herein supersede all previous terms, specifications, conditions and prices, and are subject to change without notice.

Revision 3-1-13

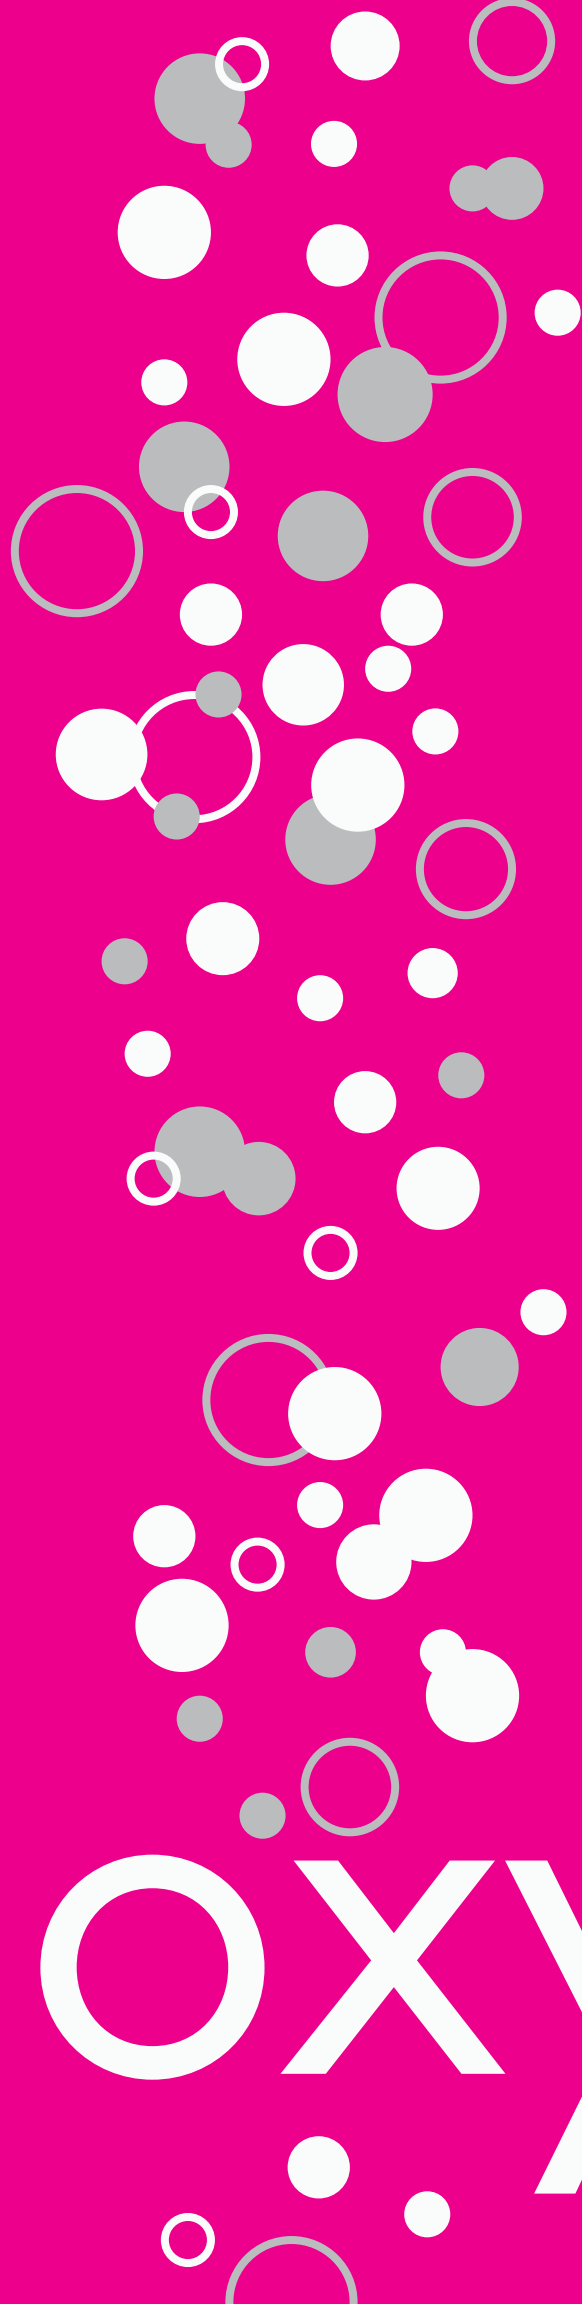

oxygen