

Quoizel, Inc.
6 Corporate Parkway
Goose Creek, SC
29445

Customer Service
Phone 631.273.2700
Fax 631.231.7102
www.quoizel.com

Assembly Instruction Sheet #IS-TF1258TVA For Style TF1258TVA

Tools Required: None

Bulb Recommended: (2) Medium Base 100W Maximum

Estimated Assembly Time: 15-20 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.



Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

Package Contents

Part	Description	Quantity
A	Shade	1 pc.
B	Base	1 pc.
C	Finial	1 pc.
D	Check Ring	1 pc.
E	Spacer Tube	1 pc.
F	Nipple with Knurled Nuts	1 pc.

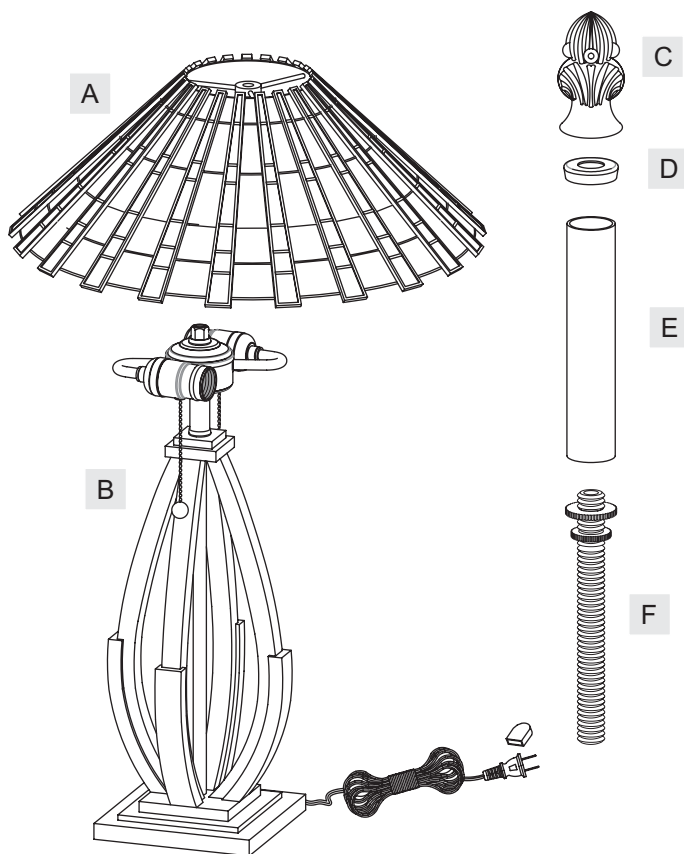


Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com

TF1258TVA

FINISH: VALIANT BRONZE

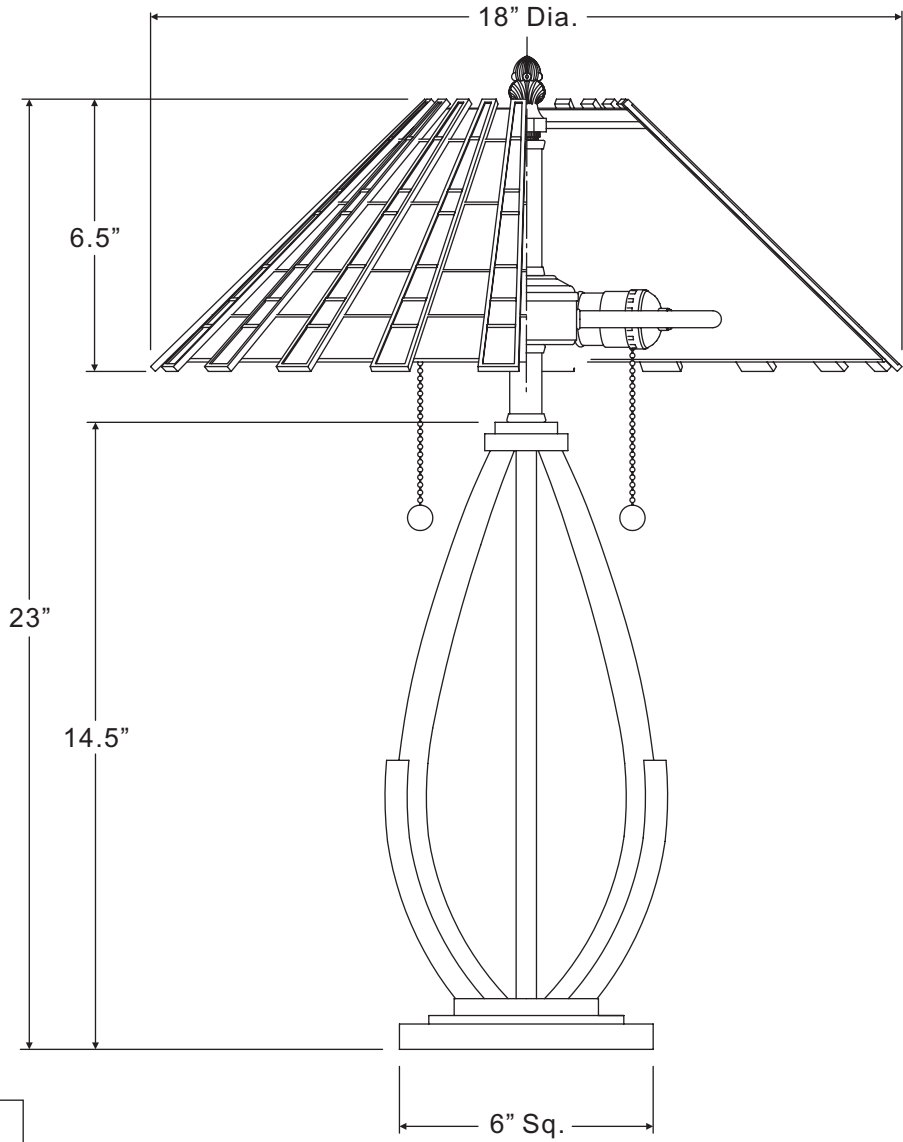

(2) 100W A19
Medium Base Bulbs
(Not Supplied)

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2"

NO.	PART NUMBER	REPLACEMENT PART DESCRIPTION	REQ.
1	11258TVATF	BASE VALIANT BRONZE TF1258TVA	1
2	G3268SH	SHADE TIFFANY 18"D X 8"H	1

Assembly Instruction Sheet #IS-TF1258TVA For Style TF1258TVA

STEP 1 – Install Nipple, Spacer Tube and Check Ring

- Remove the Knurled Nuts from the Nipple with Knurled Nuts (F).
- Thread one end of the Nipple into the Hex Coupling on the top center of the Base (B). Hand tighten until snug.
- Pass the Spacer Tube (E) and the Check Ring (D) over the top end of the Nipple. Secure by threading the Small Knurled Nut onto the Nipple. Hand tighten until snug.
- Thread the Big Knurled Nut onto the Nipple and adjust it to proper location for the Shade (A) and Finial (C).

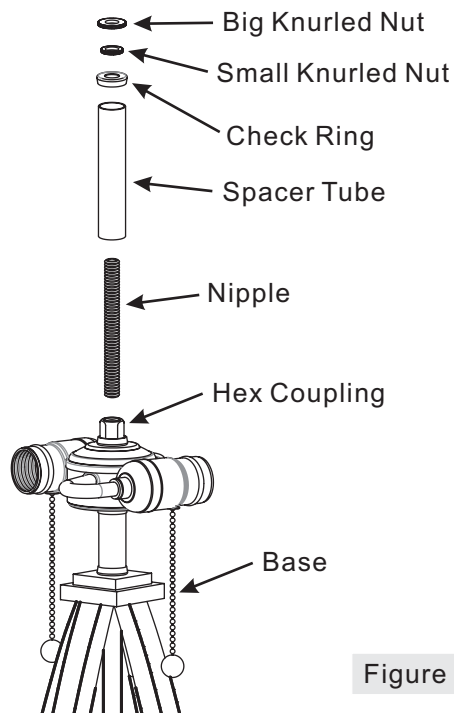


Figure 1

STEP 2 – Install Shade

- Place the Shade (A) over the top end of the Nipple and secure with the Finial (C). Hand tighten until snug.

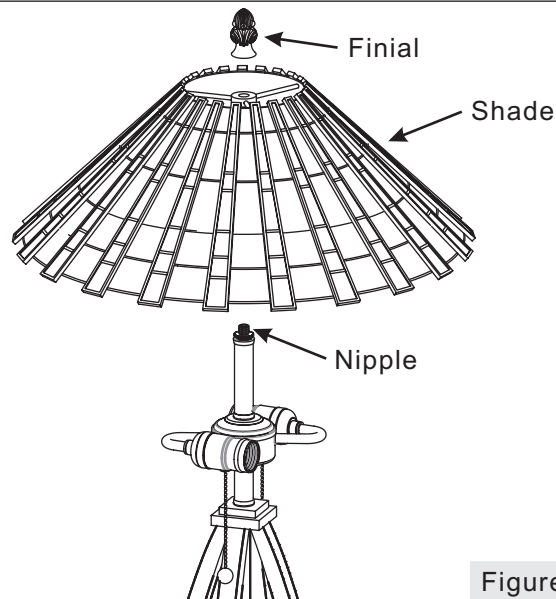


Figure 2

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www. quoizel. com

Assembly Instruction Sheet #IS-TF1258TVA For Style TF1258TVA

STEP 3 – Install Bulb

- A. This fixture uses standard bulb with a standard screw base.
Maximum 100 watts.
- B. Insert bulb and screw properly into place.

Your fixture is now assembled and ready to use. Enjoy!

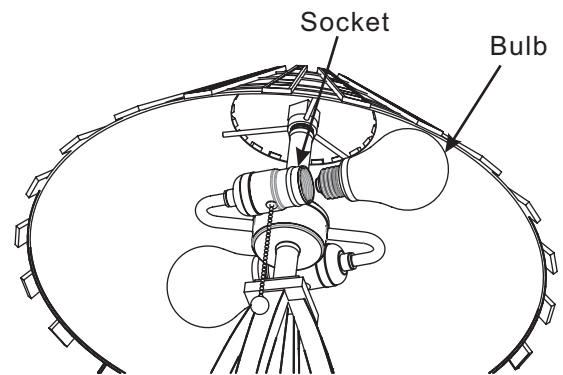


Figure 3

Thank you for purchasing a Quoizel product.

**Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www. quoizel. com**