




**LED RETROFITS,
RETROFIT KITS &
FLUSH MOUNT
FIXTURES**

120V Recessed downlight retrofits

Spring clip mounting system

S9123: 4" Gimbal

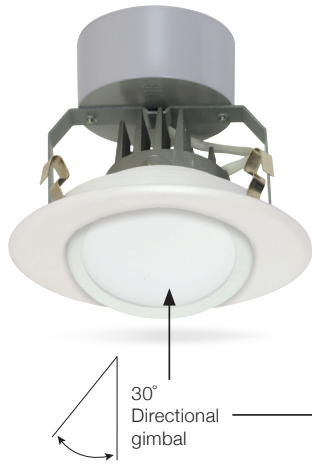

S9125: 5"-6" Gimbal



S9123 Illumination 8W 90°

Center Beam LUX	Beam	
	W	H
2m 46.61 LUX	4.1m	4.1m
4m 11.65 LUX	8.2m	8.2m
6m 5.18 LUX	12.3m	12.4m

S9125 Illumination 11W 90°

Center Beam LUX	Beam	
	W	H
2m 67.68 LUX	4.4m	4.4m
4m 16.92 LUX	8.8m	9.9m
6m 7.52 LUX	13.2m	13.3m

Applications

- Residential
- Office
- Retail
- Hospitality

Features

- Direct replacement for reflector lamps
- Dimmable*
- Long life, 35,000 hours
- Environmentally friendly – no UV or IR radiation
- 90 CRI
- 3 year warranty**
- Damp location listed - Gimbal
- U.L. wet location listed - Baffle
- ENERGY STAR® certified

S9124: 4" Baffle



S9125: 5"-6" Baffle, 820 Lumens
S9126: 5"-6" Baffle, 1210 Lumens



S9124 Illumination 8.5W 90°

Center Beam LUX	Beam	
	W	H
2m 60.97 LUX	3.9m	3.9m
4m 15.24 LUX	7.8m	7.9m
6m 6.77 LUX	11.7m	11.8m

S9126 Illumination 13W 90°

Center Beam LUX	Beam	
	W	H
2m 99.28 LUX	4.0m	4.0m
4m 24.82 LUX	8.0m	8.0m
6m 11.03 LUX	12.1m	12.0m

S9127 Illumination 20W 90°

Center Beam LUX	Beam	
	W	H
2m 143.97 LUX	4.0m	4.0m
4m 35.99 LUX	8.0m	7.9m
6m 16.00 LUX	11.9m	11.9m

E26 Adapter included



Recessed Downlight Retrofit - 120V

Item Number	Lamp Description	Watts	Volts	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/Hours
S9123	8WLED/RDL/4GBL/120V	8	120	90	3000K	410	90°	4	35,000
S9124	8.5WLED/RDL/4BFL/120V	8.5	120	90	3000K	480	90°	3 3/8	35,000
S9125	11WLED/RDL/5-6GBL/120V	11	120	90	3000K	635	90°	4 1/4	35,000
S9126	13WLED/RDL/5-6BFL/120V	13	120	90	3000K	820	90°	3 3/4	35,000
S9127	20WLED/RDL/5-6BFL/120V	20	120	90	3000K	1210	90°	4	35,000

* Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

** See separate warranty for complete terms and conditions.

Pack: Master 12/1



Recessed downlight retrofit kits

Recessed can, trim and LED all in one easy to install package

Applications

- Residential
- Office
- Retail
- Hospitality


Features

- Dimmable*
- Long life, 35,000 hours
- Certified air tight
- 3 year warranty**
- Damp location listed - Gimbal
- U.L. wet location listed - Baffle
- ENERGY STAR® certified

Hanger bars & pan (sold separately) for new construction

S9178 - Hanger bars & 4" pan

S9179 - Hanger bars & 5"-6" pan



Remodler kit includes recessed can



Recessed Downlight Retrofit Kits

Item Number	Lamp Description	Watts	Volts	Base	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/Hours
S9121	10WLED/RDL/4BFL/KIT/120V	10	120	Connector	80	3000K	480	90°	6 (can)	35,000
S9120	10.4WLED/RDL/4GBL/KIT/120V	10.4	120	Connector	80	3000K	437	90°	6 (can)	35,000
S9122	11.6WLED/RDL/5-6BFL/KIT/120V	11.6	120	Connector	80	3000K	680	90°	6 (can)	35,000

* Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

** See separate warranty for complete terms and conditions.

Pack: Master 6/1

S9121: 4" Baffle



S9121 Illumination 10W 90°

Center Beam LUX	Beam W	H
2m 58.10 LUX	4.0m	3.9m
4m 14.52 LUX	8.0m	7.9m
6m 6.46 LUX	12.0m	11.8m

S9120: 4" Gimbal



30° Directional gimbal

S9120 Illumination 10.4W 90°

Center Beam LUX	Beam W	H
2m 50.44 LUX	3.9m	4.0m
4m 12.61 LUX	7.8m	7.9m
6m 5.60 LUX	11.7m	11.9m

S9122: 5"-6" Baffle



S9122 Illumination 11.6W 90°

Center Beam LUX	Beam W	H
2m 86.83 LUX	3.8m	3.9m
4m 21.27 LUX	7.7m	7.6m
6m 9.65 LUX	11.5m	11.4m

12V Recessed downlight retrofits

Applications

- Residential
- Office
- Retail
- Hospitality

Features

- Dimmable
- Damp location listed - Gimbal
- Wet location listed - Baffle
- Works with magnetic and electronic 12V transformers

Bi-Pin Adapter included




S9128: 3" Baffle



S9128 Illumination 7W 12V 90°

Center Beam LUX	Beam Width
1m 208.33 LUX	1.942m
2m 52.08 LUX	3.883m
3m 23.15 LUX	5.825m

S9129: 4" Gimbal

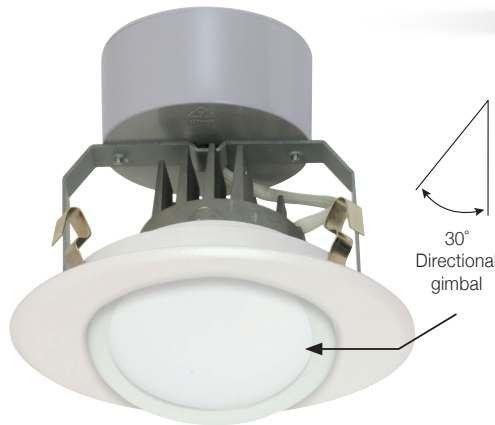

S9129 Illumination 7W 12V 90°

Center Beam LUX	Beam Width
1m 203.22 LUX	2.008m
2m 50.81 LUX	4.015m
3m 22.58 LUX	6.023m

S9130: 4" Baffle



S9130 Illumination 8W 12V 90°

Center Beam LUX	Beam Width
1m 253.09 LUX	1.925m
2m 63.27 LUX	3.850m
3m 28.12 LUX	5.775m

Recessed Downlights 12V



Item Number	Lamp Description	Watts	Volts	Base	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/Hours
S9128	7WLED/RDL/3BFL/12V	7	12	GU5.3	90	3000K	400	90°	3	35,000
S9129	7WLED/RDL/4GBL/12V	7	12	GU5.3	90	3000K	430	90°	4	35,000
S9130	8WLED/RDL/4BFL/12V	8	12	GU5.3	90	3000K	460	90°	3 5/8	35,000

Pack: Master 12/1

4" LED recessed downlight retrofits

Applications

- Residential
- Office
- Retail
- Hospitality




Features

- Solid state LED lighting
- Direct replacement for reflector lamps
- Dimmable*
- Long life, 40,000 hours
- High efficiency/Environmentally friendly
- No UV or IR radiation
- 3 year warranty**
- U.L. damp location listed - Gimbal
- U.L. wet location listed - Baffle
- ENERGY STAR® certified



E26 Adapter included



S9116: 4" Gimbal

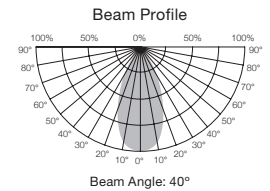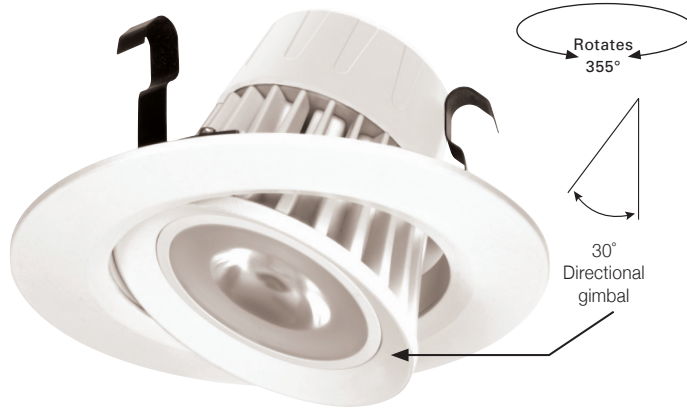

S9195: 4" Baffle 2700K
S9117: 4" Baffle 3000K

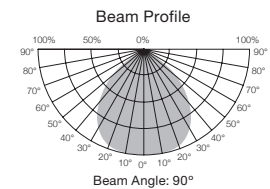

4" LED Recessed Downlight Retrofits

Item Number	Lamp Description	Watts	Volts	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/ Hours
S9195	8LED/RDL/4/120V/27K/DIM	8	120	80	2700K	560	90°	2 5/8	35,000
S9117	8LED/RDL/4/120V/30K/DIM	8	120	90	3000K	500	90°	2 5/8	35,000
S9116	9LED/RDL/4/120V/30K/GMBL	9	120	90	3000K	650	40°	2 1/2	35,000


GU10 base sold separately, item number: S9000

Pack: Master 12/1



* Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

** See separate warranty for complete terms and conditions.

5", 6" LED recessed downlight retrofits

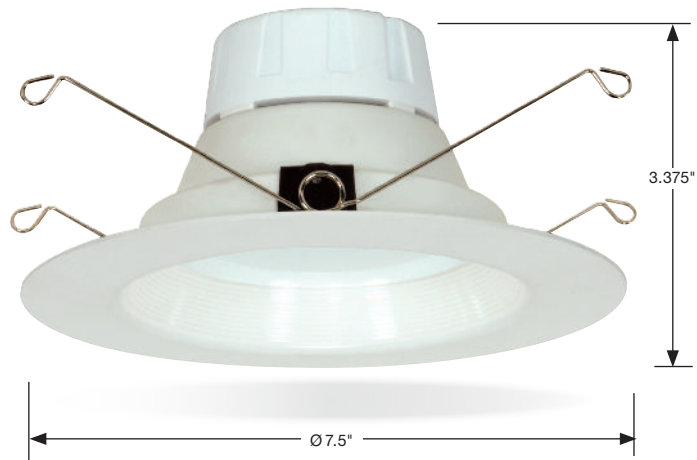

S9196: 5"-6" Baffle, 2700K
 S9118: 5"-6" Baffle, 3000K, 750 Lumens
 S9119: 5"-6" Baffle, 3000K, 1200 Lumens



Applications

- Residential
- Office
- Retail
- Hospitality

Features

- Solid state LED lighting
- Direct replacement for reflector lamps
- Dimmable*
- Long life, 40,000 hours
- High efficiency/Environmentally friendly
- Innovative design
- No UV or IR radiation
- 3 year warranty**
- U.L. wet location listed
- ENERGY STAR® certified

E26 Adapter included



5", 6" LED Recessed Downlight Retrofits



Item Number	Lamp Description	Watts	Volts	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/Hours
S9196	11LED/RDL/5-6/120V/27K/DIM	11	120	80	2700K	800	90°	3 3/8	35,000
S9118	11LED/RDL/5-6/120V/30K/DIM	11	120	90	3000K	750	90°	3 3/8	35,000
S9119	15LED/RDL/5-6/120V/30K/DIM	15	120	90	3000K	1200	90°	3 3/8	35,000

GU24 base sold separately S8999

Pack: Master 12/1

* Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

** See separate warranty for complete terms and conditions.

7" LED flush mount fixture

Applications

- Kitchens
- Bathrooms
- Hallways
- Family rooms
- Offices

Features

- Uses only 13.5 Watts
- Dimmable*
- Damp location listed
- Available in White or Satin Nickel
- Includes 3-1/2" mounting screws
- ENERGY STAR® certified
- 3 year warranty**

S9190




Fits 4" junction box

S9194



Fits 4", 3" & Pancake junction boxes

Includes: LED Fixture, Mounting Ring, Wire Connector

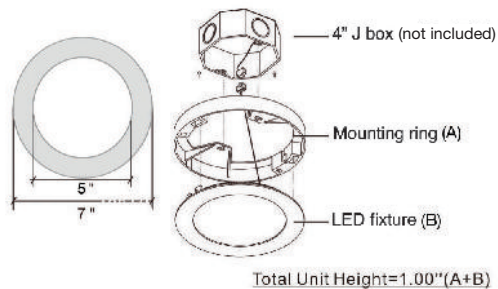


Illuminance at a Distance

Center Beam Lux	Beam V	Lux H
7 Ft 90.65 LUX	18 Ft 18 Ft	18 Ft
13 Ft 22.65 LUX	36 Ft 36 Ft	36 Ft
20 Ft 10.07 LUX	54 Ft 54 Ft	54 Ft
26 Ft 5.67 LUX	72 Ft 72 Ft	72 Ft
33 Ft 3.63 LUX	91 Ft 91 Ft	91 Ft
39 Ft 2.52 LUX	109 Ft 109 Ft	109 Ft

Vert. 5 Spread: 108.2 Vert. 5 Spread: 108.2

Light Distribution



7" LED Flush Mount



Item Number	Lamp Description	Watts	Volts	Finish	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/Hours
S9190	13.5WLED/7FL/WH/27K	13.5	120	White	180	2700K	810	108°	1	40,000
S9099	13.5WLED/7FL/WH/3K	13.5	120	White	180	3000K	820	108°	1	40,000
S9191	13.5WLED/7FL/WH/5K	13.5	120	White	180	5000K	890	108°	1	40,000
S9192	13.5WLED/7FL/SN/3K	13.5	120	Satin Nickel	180	3000K	820	108°	1	40,000
S9193	13.5WLED/7FL/WH/3K/1.8	13.5	120	White	180	3000K	820	108°	1.8	40,000
S9194	13.5WLED/7FL/SN/3K/1.8	13.5	120	Satin Nickel	180	3000K	820	108°	1.8	40,000

* Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

** See separate warranty for complete terms and conditions.

Pack: Master 12/1

