


ASSEMBLY INSTRUCTIONS

ITEM NO.:1-3412-12-56

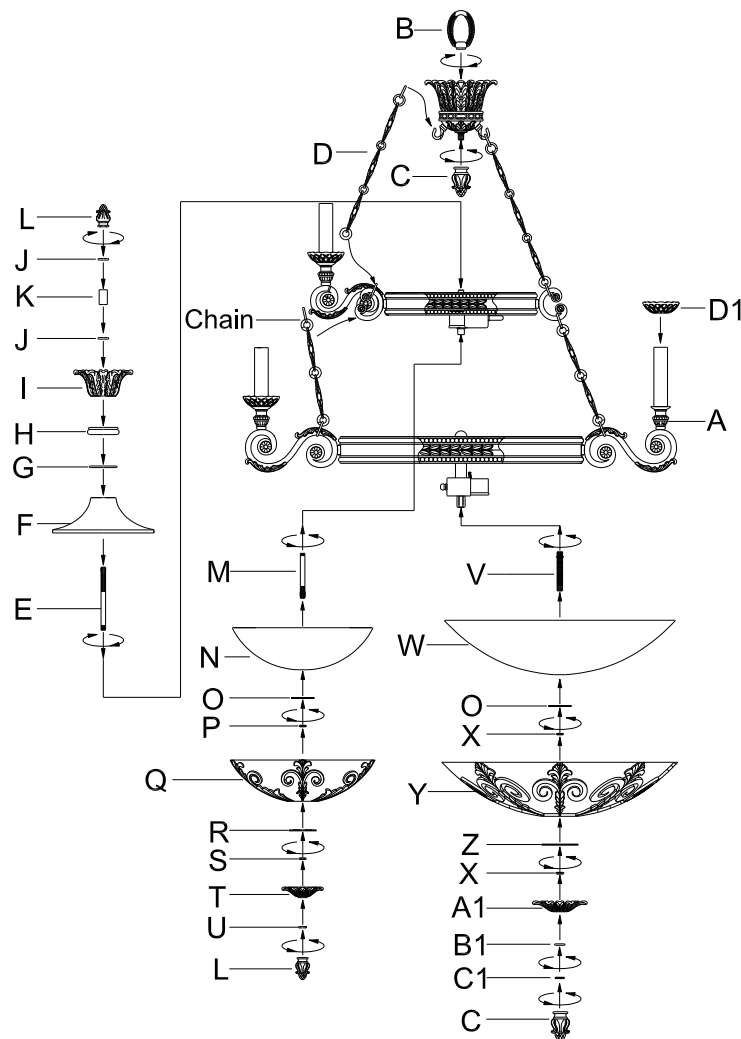

B → C → D → A → E → F → G → H → I → J → K → L →
M → N → O → P → Q → R → S → T → U → V → W → X →
Y → Z → A1 → B1 → C1 → D1

1. Carefully unpack and identify all parts referring to the illustration for parts identification.
2. Turn power to the installation point **OFF**.
3. Thread fixture loop (B) into the nipple inside the big cover of fixture body (A), then finial (C) into the nipple at bottom of big cover of fixture body (A) as shown in the diagram.
4. Attach the ends of chain (D) to the hooks of fixture body (A) as shown in the diagram.
5. Hang the end of chain shown above onto the hook of fixture body (A) as shown in the above.
6. Thread stem (E) into the coupling at center of fixture body (A), then pass glass (F), cap (G), cover (H), big cover (I), cap (J) and pipe (K) through the stem (E), and secure with finial (L).
7. Thread stem (M) into the coupling as shown.
8. Install proper bulbs (not provided) to sockets referring to the markings and/or labels on the fixture for maximum wattage.
9. Raise glass (N) and steel washer (O) and over stem (M) and secure with hex nut (P).
10. Place steel bowl (Q) and big steel washer (R) over the stem (M), and secure with hex nut (S).
11. Place font (T) and cap (U) over the stem (M) and secure with finial (L).
12. Repeat step (7), (8), (9), (10), (11) for the installation of nipple (V), glass (W), steel washer (O), hex nut (X), steel bowl (Y), steel strap (Z), font (A1), cap (B1), knurled nut (C1) and finial (C).
13. Place glass plate (D1) over each socket.
14. Restore power to the installation point **ON**. Retain this sheet for future reference.