




SCHONBEK®

TRILLIANE 5856- __ __ S

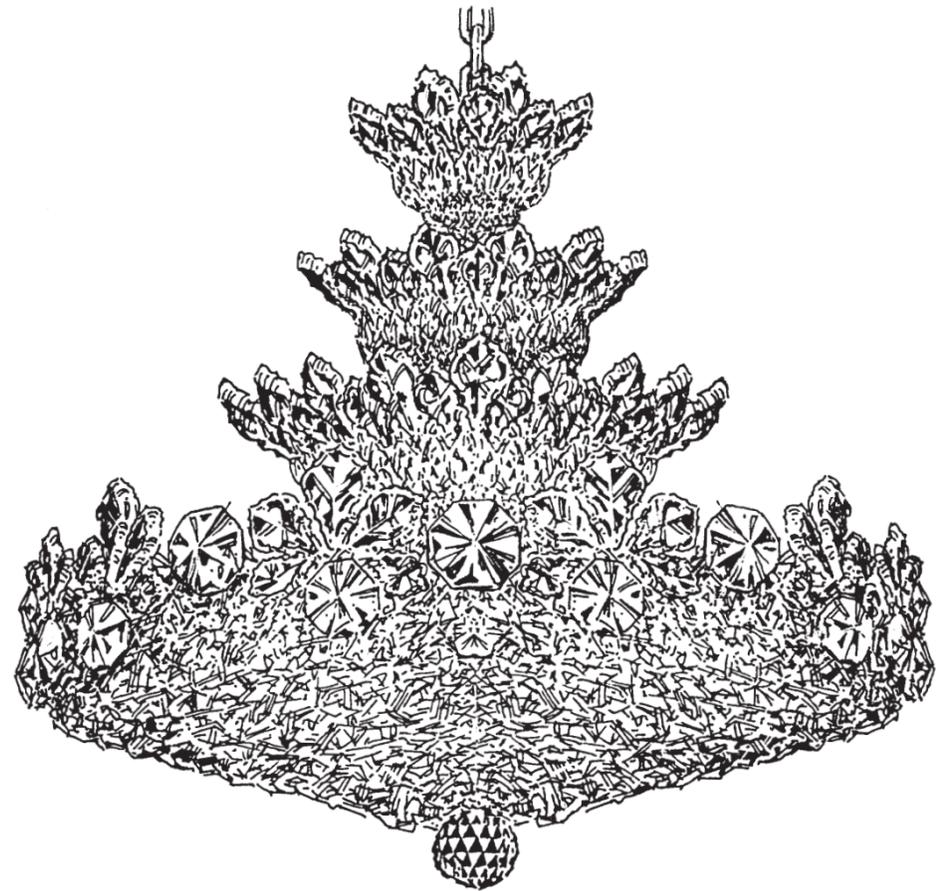

THIS DESIGN IS THE PROPRIETARY TRADE DRESS/TRADemark OF SWAROVSKILIGHTING, LTD.

30 Lights
Diameter: 30"
Body Length: 27"
Hanging Weight: 64 lbs.




SCHONBEK®

MAX 40 W		110-120 V					

SCHONBEK® is a member of the Swarovski group.

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.


WARNING: THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF AN OUTLET BOX.

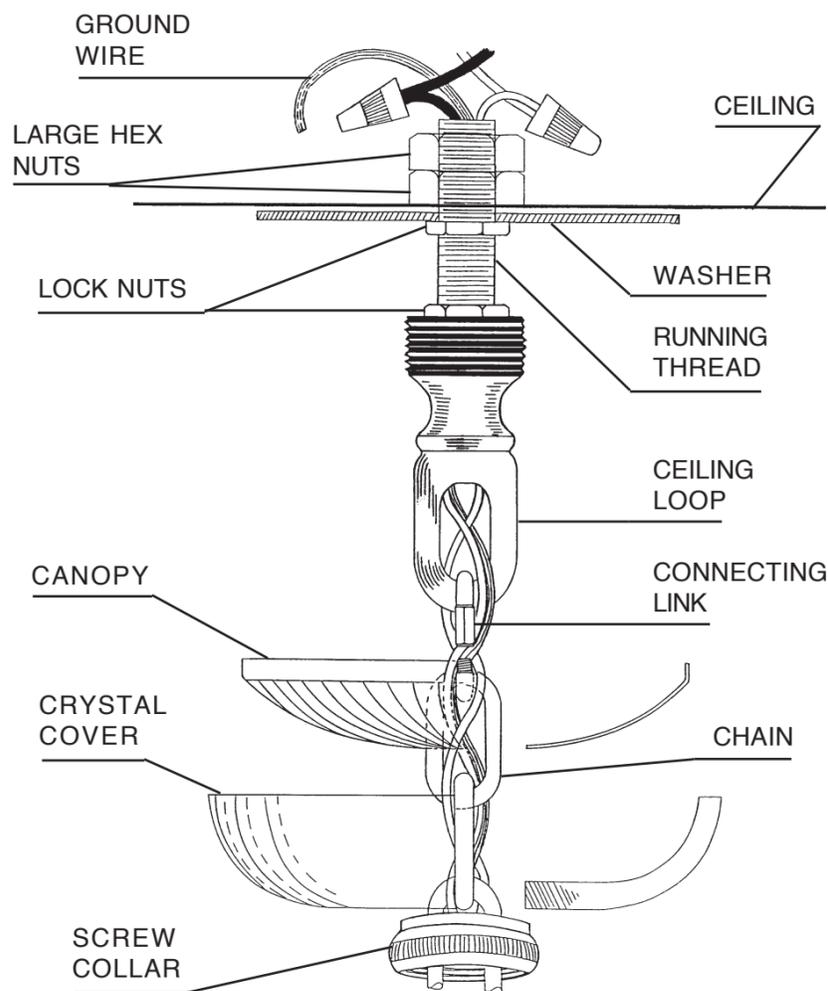

1 MAKE SURE POWER IS DISCONNECTED!!


- 2** Attach washer to supporting member in ceiling sufficient to support weight of fixture.
- 3** Slip screw collar, crystal cover and metal canopy over chain. Determine the suspension length of the fixture and cut chain, if necessary. Use two connecting links to attach chain to chandelier loop and ceiling loop.
- 4** Insert stem wire through chain and ceiling loop. Connect wires. Fixture MUST be grounded.
- 5** Check distance from ceiling to loop to assure canopy assembly will be flush against ceiling.
- 6** Attach canopy to ceiling with screw collar.

Cleaning instructions for Crystal "N", "R" & "S"




Crystals "R" & "S" need to be gently removed. Do this by lifting the outer end of the crystal up while pressing down on the end of the hook.

Crystal "N" were shipped assembled, ready to be installed. One of the hooks may come loose during cleaning. Tighten the nut with wrench.
 NOTE: Hold the wire in position and do NOT hold the crystal!
 If any of the crystals should need replacing, the reference number MUST be used. The new crystal can be replaced in the same manner as tightening a loose crystal.

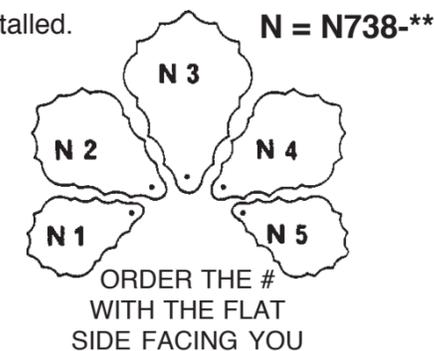

Installation of Crystal "P", "Q", "K", "L" and "M"


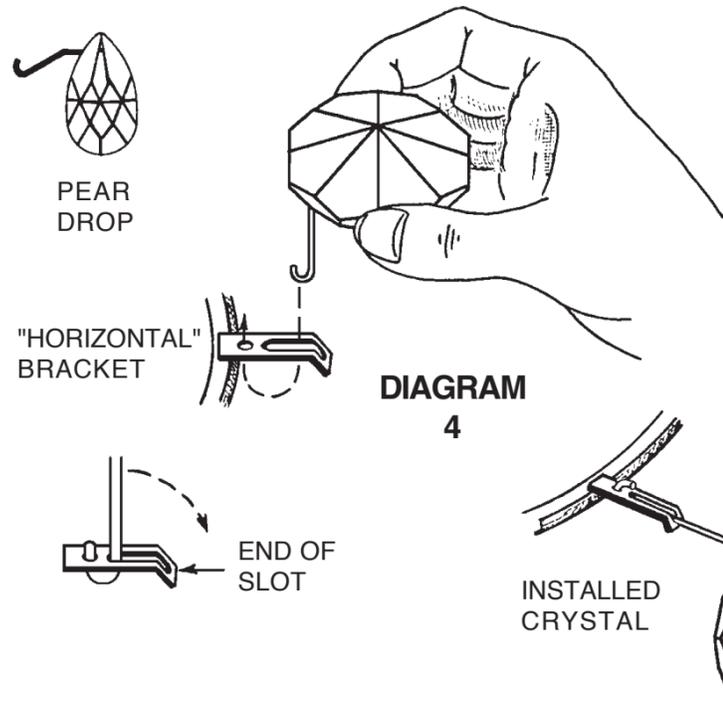


Position the crystal above the "horizontal" bracket so that the end of the hook enters the slot, gently push toward the center of the fixture and raise the crystal making sure that the end of the hook comes up through the hole, in line with the slot.

With the hook in the bracket, as shown, pivot the crystal downwards so that the hook rests in the end of the outer slot.

Installation of Crystal "R" and "S"

Pendalouques are installed in much the same manner. Slide the end of the hook through the slot of the bracket and up through the hole. Pivot the Pendalouque until the hook rests in the end of the slot.

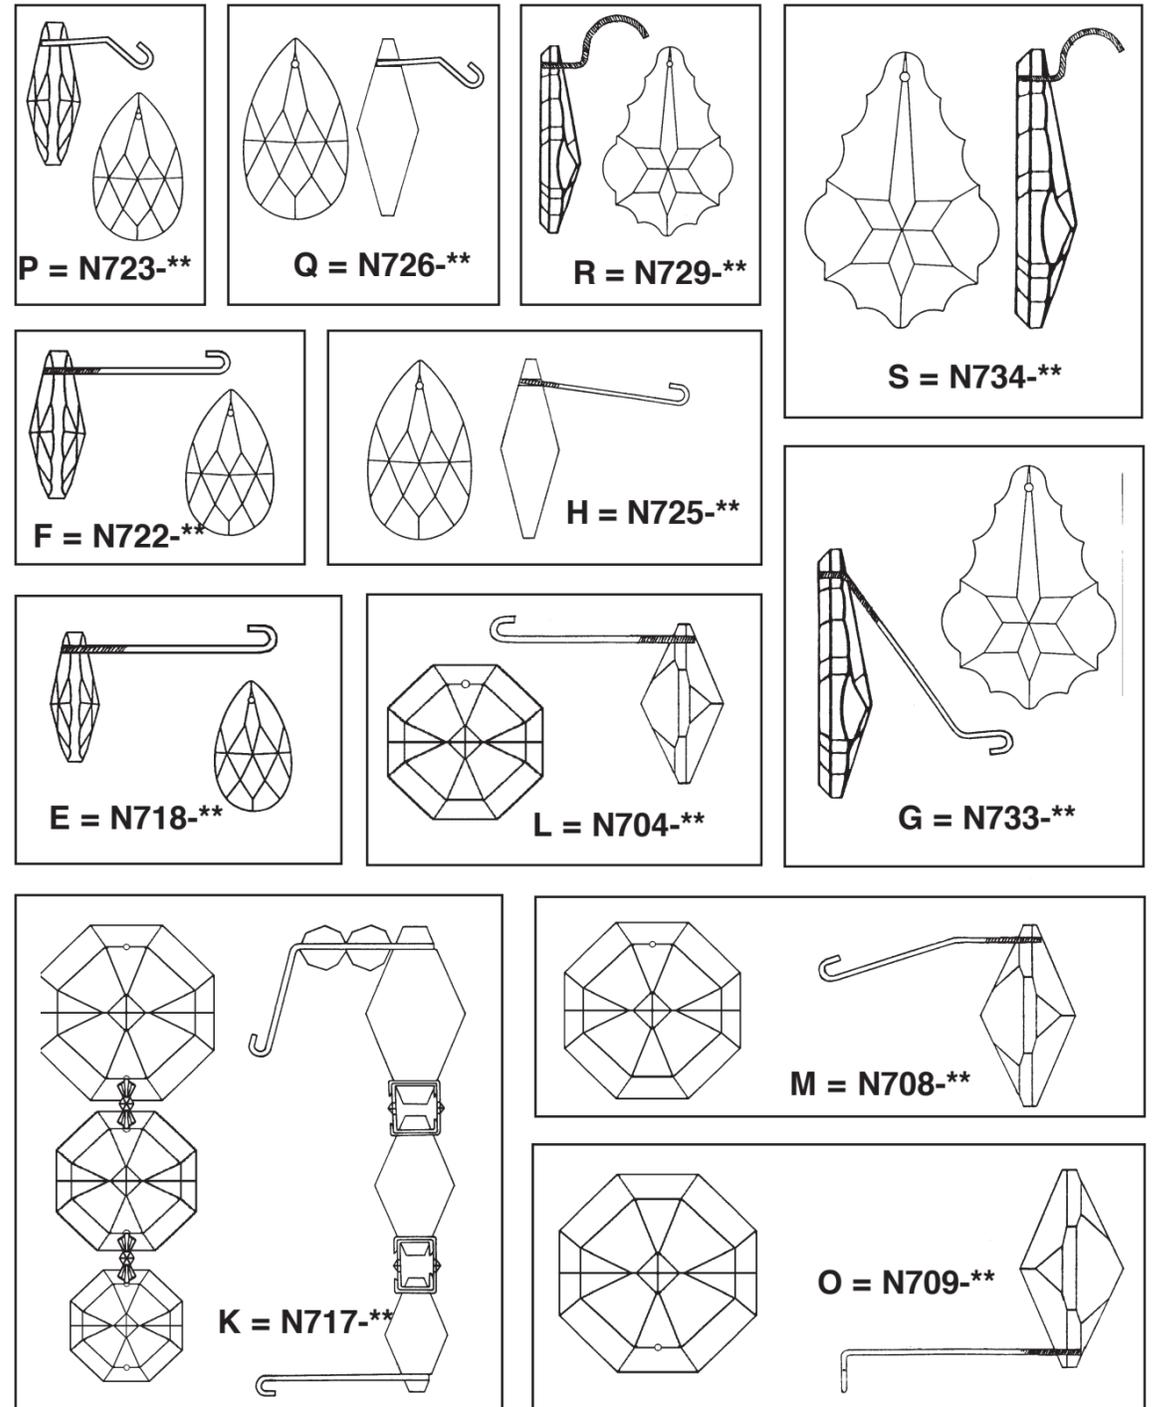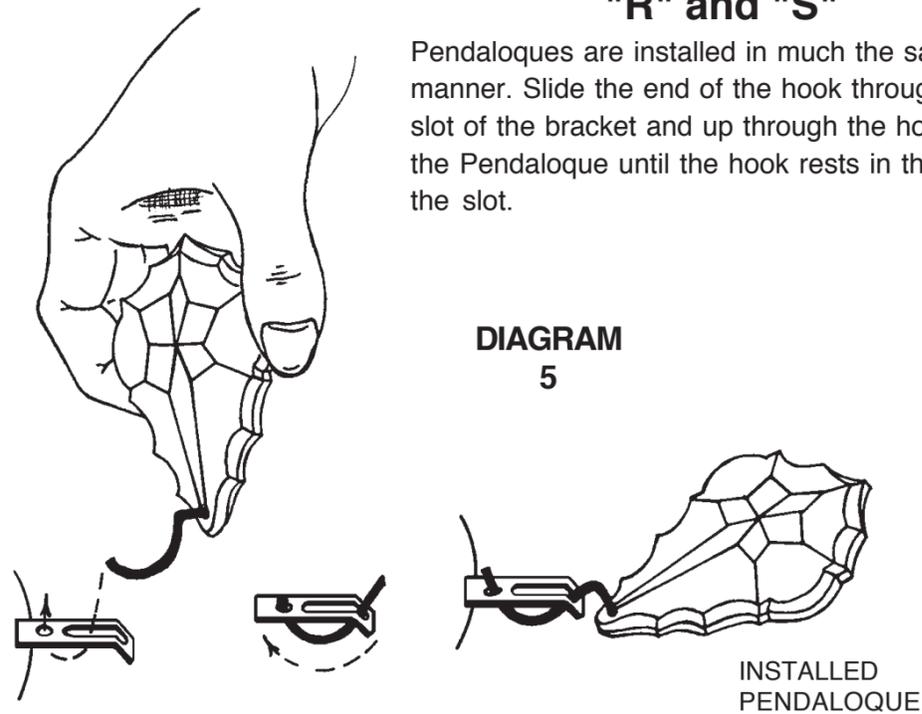



7


Install bulbs and be sure to test fixture BEFORE trimming.



You will need 10 - B10
25 Watts Recommended
40 Watts Max



You will need 3 - B8
25 Watts Recommended
40 Watts Max




You will need 17 - G16-1/2
25 Watts Recommended
40 Watts Max

8 Hook Chains "A" into the top ring of the crown and hook the bottom of the chain into the loose washer. Close bottom hook after inserting into the washer. Hook Chains "B" into the center ring of the crown and hook the bottom of the chain into the washer. Close bottom hook after inserting into the washer. Hook Chains "C" into the lower ring of the crown and hook the bottom of the chain into the ring. Close bottom hook after inserting into the ring.

9 Hook Crystal "P" into every second bracket of the crown at the top. See diagram 4 on page 6. Hook small Crystal "R" into every second vacant bracket of the crown. See diagram 5 on page 6. Hook large Crystal "S" into the remaining brackets of the crown. See diagram 5 on page 6. Repeat the above for Crystal "Q", "R" and "S" for center and lower crown at the top.

10 Screw Ball "D" onto the bottom of the frame. Tighten set screw with supplied tool to lock ball into position.



11 Hook Crystal "E" into the holes from the inside of the inner ring 1. Hook Crystal "F" into the holes from the inside of ring 2.

12 Hook Crystal "G" into the holes from the inside of ring 3. Hook Crystal "G" into the holes from the inside of ring 5, between Crystal "G" of ring 3 and in line with Crystal "F" of ring 2. Hook Crystal "F" into holes from the inside of ring 4, between Crystal "G". Hook Crystal "G" into the holes from the inside of ring 6, between Crystal "G" of ring 5 and in line with Crystal "F" of ring 4. Hook Crystal "H" into the remaining holes of ring 6, between Crystal "G". Hook Crystal "J" into the holes of ring 8. Hook Crystal "J" into the small brackets located beneath the large outer ring, ring 9.

13 Insert bent wires of the large jewels of Crystals "K" into the horizontal brackets on ring 9, located between Crystals "J". See diagram 1 for location and diagram 4 on page 6 for detailed instructions. Hook the other end of the crystal into the slots of ring 7. Hook Crystal "L" into the remaining horizontal brackets, located above Crystals "J" of ring 9. See diagram 1 for location and diagram 4 on page 6 for detailed instructions.

14 Hook Crystals "M" into the brackets that are angled upwards on ring 9. See diagram 1 for location and diagram 4 on page 6 for detailed instructions. Remove the knurled knobs attached to screws on the inside of the outer ring 9. Install Fan Ornaments "N" to every second screw of ring 9 directly above Crystal "M" and tighten with knurled knob. See diagram 2 detailed instructions. Attach Crystal "O" between Fan Ornaments "N" on ring 9 and tighten with knurled knob. See diagram 3 for detailed instructions.

