ASSEMBLY INSTRUCTION

ITEM# 78210

1. Fasten mounting strip onto wall outlet box using two outlet box screws.
2. Connect the wires from the fixture to the power supply wires outlex box.
   A. Twist together white wire from the fixture with white wire from outlet box. Cover with wire connectors.
   B. Twist together black wire from the fixture with black wire from outlet box. Cover with wire connectors.
   C. Wrap the ground wire from the fixture around the green ground screw located on the mounting strip. Tighten the green ground screw to the mounting strip.
3. Screw the hex nut into the nipple,then screw the 3/8" nipple into the mounting strip with lock wassher.
4. Pass back plate through the support screws of mounting strip. Tighten cap nut onto the protruding 3/8" nipple on mounting strip until the fixture body is held firmly to the wall.
5. Install the bulb into socket. Do not use greater than 13-watt PL bulb
6. Place the bottom cage into the body .
7. Screw the nut into the body until tight.

NOTE: Carefully remove the fixture from the carton. Check that all parts shown in package parts 1 and parts 2 are included. Be carefully not to misplace any of the screws or wire connectors, which are needed for installing the fixture.

PACKAGE PART
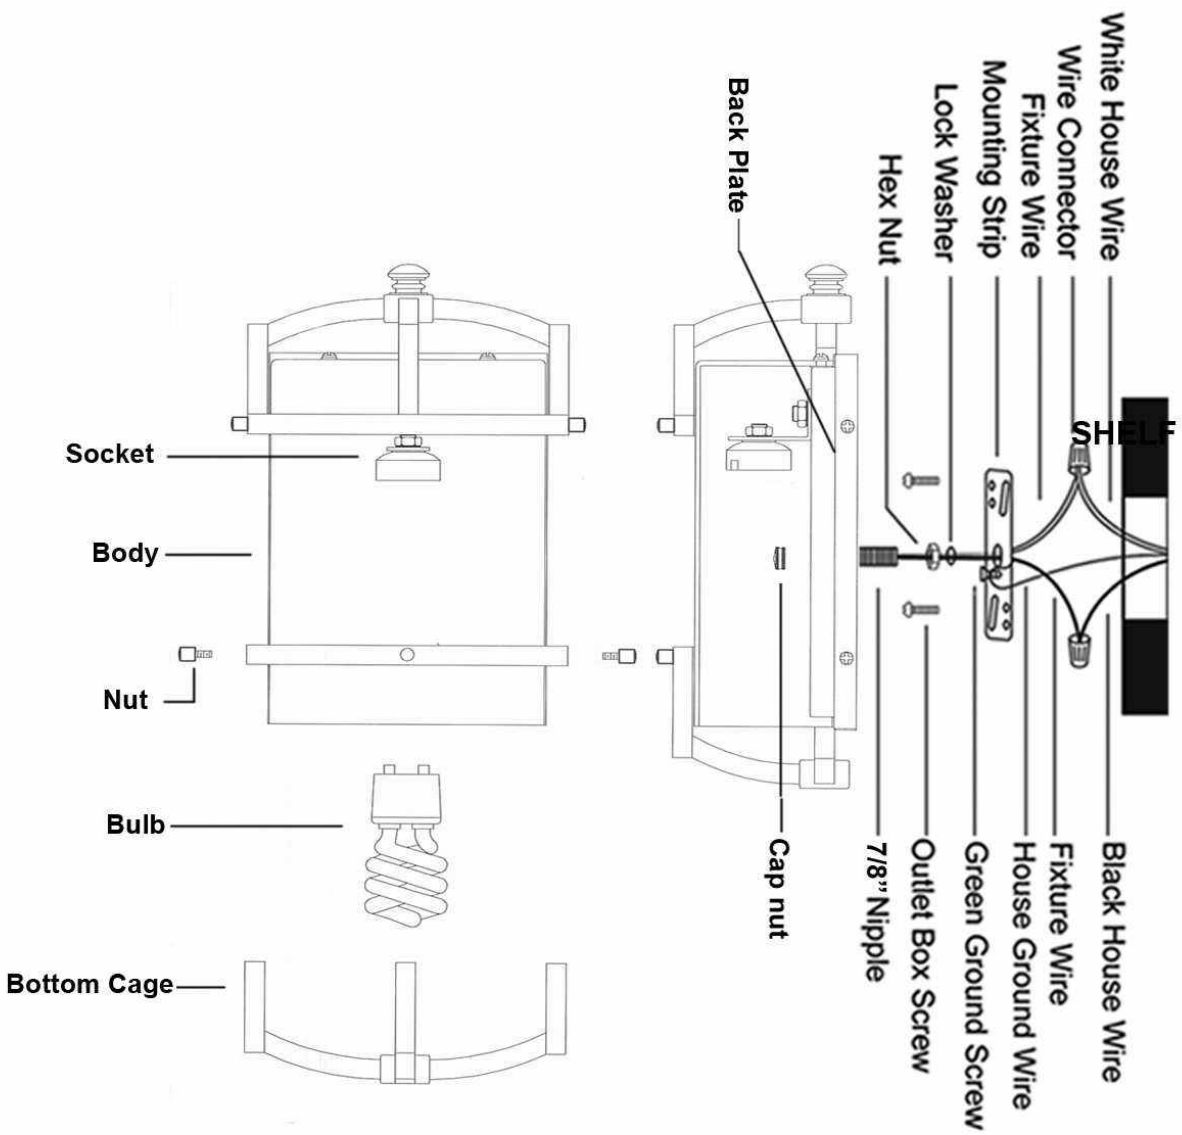
Wire Connectors	2	Cap Nut	1
Support Screw	2	Hex nut	1
3/8" Nipple	1	Lock washer	1
Green Ground Screw	1	Bulb	1
Outlet Box Screw	2	Nut	2
Mounting strip	1	Shelf	1