

access

LIGHTING

INSTALLATION INSTRUCTIONS

IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.


NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

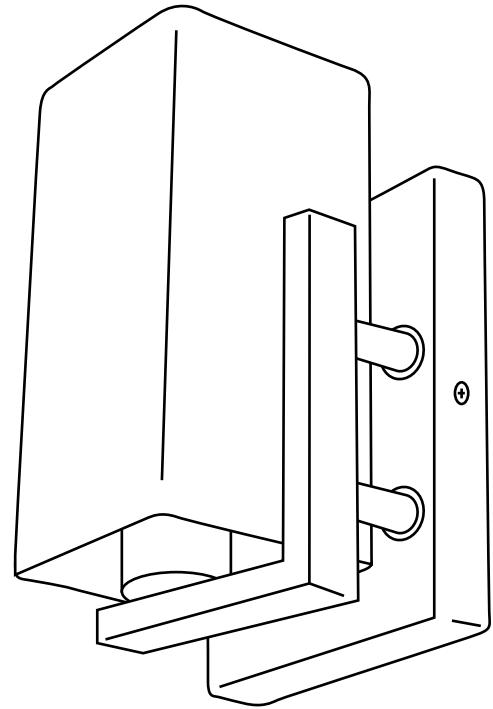

COLLECTION
Erin

APPLICATION
Wall Fixture


MODEL NO.
50193

WHAT WE PROVIDE

- Crossbar with Bracket
- Mounting Hardware
- Back Plate
- 1 x Glass Shade

WHAT YOU NEED


- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code
- 1 x 60W A19

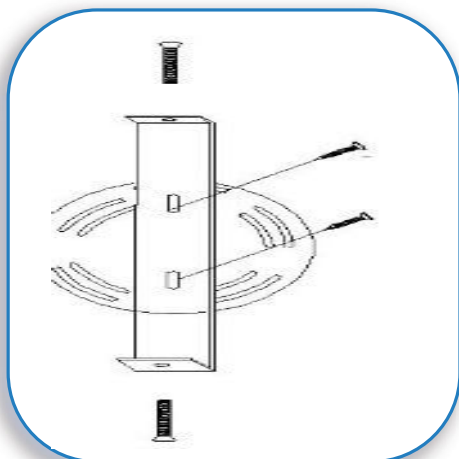

1

MOUNT CROSSBAR PLATE


If there is an existing fixture remove it.
Mount the crossbar with bracket to the J-box with the supplied screws.

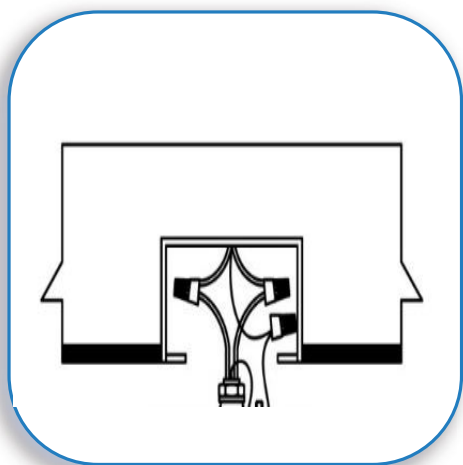

2

CONNECT THE WIRES


Gently pull the supply wire. Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wires to the white fixture wire. Secure with the supplied wire nuts. Either wrap the green wire around one of the protruding screws or connect it to the supply ground wire. Secure all wire with U.I. Certified electrical tape (not supplied). Tuck all wires carefully into the J-Box.

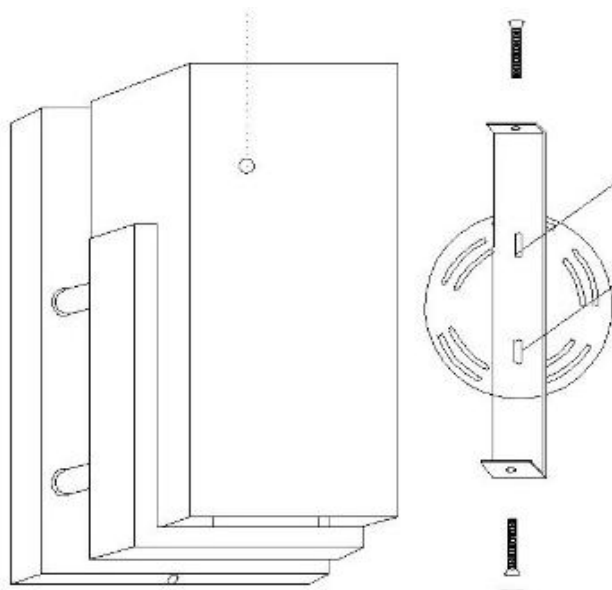

3

MOUNT FIXTURE TO THE CROSSBAR

Position the fixture plate over the crossbar plate. Align the holes at the top and bottom of the plates. Secure with the supplied screws.

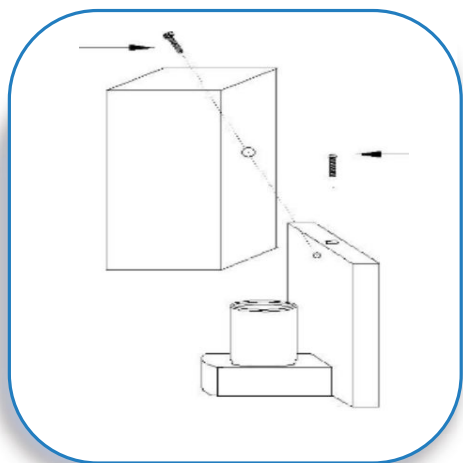

4

SECURE THE GLASS SHADE

Place the glass shade over the socket. Align the hole in the glass and the fixture plate. Insert the supplied screw to secure the glass.



5

INSERT THE BULB

Insert the bulb.

MAXIMUM WATTAGE 60W.

DO NOT EXCEED THE WATTAGE AS STATED
ON THE WARNING LABEL AND IN THE INSTRUCTION
SHEETS



6

RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS FIXTURE

CAUTION

Please ensure that the fitting is cool and
switched off before replacing the bulb.
DO NOT use bulbs that might exceed the
maximum wattage, stated on caution label.