

access

LIGHTING

INSTILATION INSTRUCTIONS

IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.

NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

STEP BY STEP INSTRUCTIONS

Before starting your installation -Disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.



COLLECTION

Lacey

APPLICATION

Pendant

MODEL NO.


50991

WHAT WE PROVIDE

- Crossbar
- Mounting Hardware
- Metal Shade
- Glass Shade

WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code
- 1 x 100w A-19 Bulb

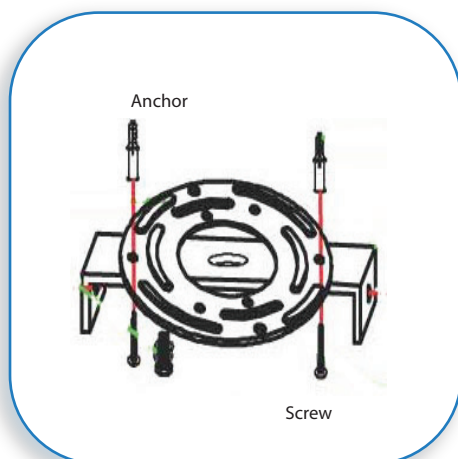

1

MOUNT CROSSBAR

If there is an existing fixture remove it.

Expose the supply wire from the outlet box.


Mount the universal crossbar to the junction

box with the supplied screws and the U-shaped

arms facing downwards. For added support, two

anchors and screws have been provided and we


encourage there use.

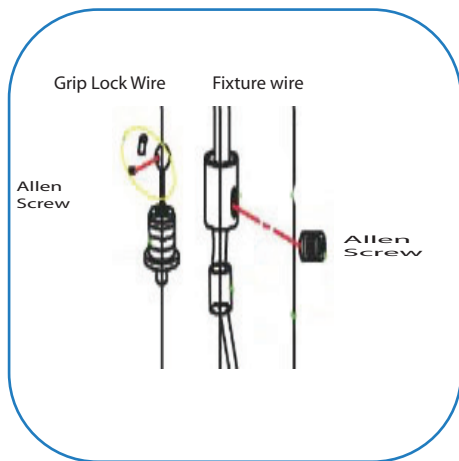

2

CONNECT SUPPLY AND FIXTURE WIRES


Adjust the fixture wires to the desired length by loosening the allen screws, and then tightening them. Leave enough wire to make connections $\pm 1"$ but cut off unnecessary wire. Connect the black supply wire to the black fixture wire and the white supply wire to the white fixture wire. Secure the green fixture wire to the ground wire or green screw on the crossbar. Secure all wire connections with wire nuts. Adjust the lock wire and sag wire with allen screws too.

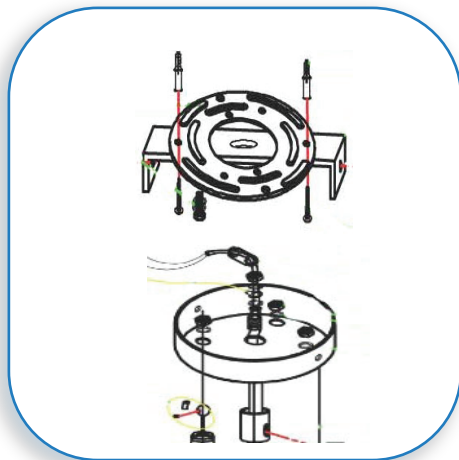

3

ATTACH CANOPY TO CROSSBAR

Hold the canopy up to the crossbar. Align the screw holes from the u-shaped arms with the holes in the canopy. Insert the supplied screws and tighten.

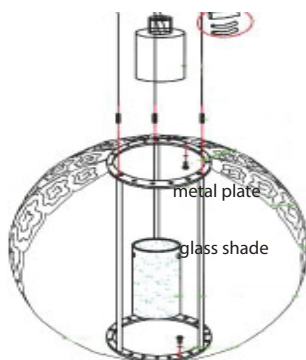

4

ATTACH THE GLASS SHADE

Attach the glass shade to the metal plate. Position the glass shade such that the holes in the shade align with the holes in the lower section of the metal plate. Insert the supplied glass retaining screws through the holes in the glass and secure by screwing into metal plate holes.



5

CONNECT SUPPLY AND FIXTURE WIRES

Insert an A-19 Bulb (not supplied with the fixture).

DO NOT EXCEED THE RECOMMENDED WATTAGE.



6

RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS FIXTURE



**WE HOPE THAT YOU GET GREAT PLEASURE
FROM YOUR ACCESS LIGHTING LUMINAIRE**